CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML570 G3 (3.0GHz, Intel dual-core Xeon)

SPECfp_rate2000 = 15.6

SPECfp_rate_base2000 = 15.3

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Sep-2005 | Hardware Avail: Oct-2005 | Software Avail: Jun-2005

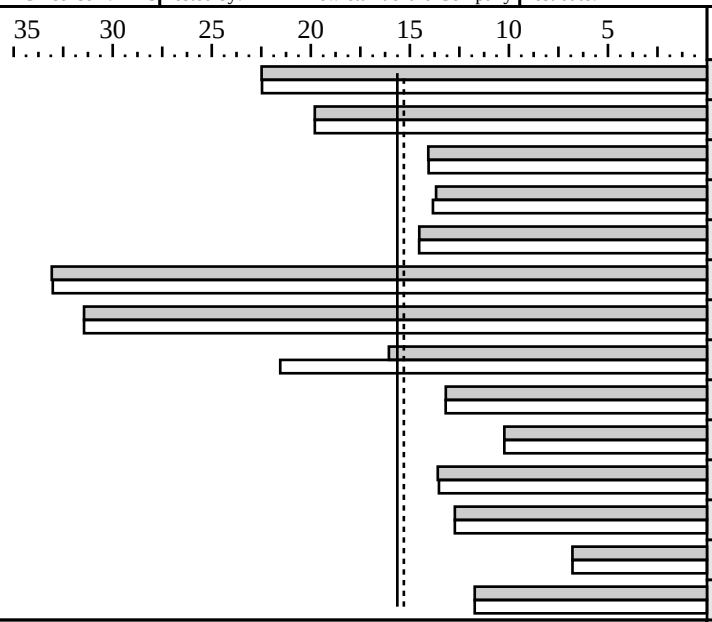

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	82.5	22.5	1	82.6	22.5
171.swim	1	182	19.8	1	182	19.8
172.mgrid	1	148	14.1	1	149	14.1
173.applu	1	178	13.7	1	176	13.8
177.mesa	1	112	14.5	1	112	14.5
178.galgel	1	102	33.1	1	102	33.0
179.art	1	95.9	31.4	1	95.9	31.4
183.equake	1	93.9	16.1	1	70.0	21.5
187.facerec	1	167	13.2	1	167	13.2
188.ammp	1	249	10.2	1	249	10.2
189.lucas	1	171	13.6	1	171	13.5
191.fma3d	1	191	12.7	1	191	12.7
200.sixtrack	1	188	6.79	1	188	6.79
301.apsi	1	257	11.7	1	257	11.7

Hardware

CPU:	Intel dual-core Xeon (3.0GHz, 2x2MB L2, 667MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD (on chip) per core
Secondary Cache:	2048KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16x1024MB PC2-3200
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.0 Build 20050624Z) Intel Fortran Compiler for 32-bit applications, (Version 9.0 Build 20050624Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use


Base tuning:    -fast -Qansi_alias +FDO
Portability flags:
  178.galgel: -FI /F32000000
Peak tuning:
  168.wupwise:  -fast -Qansi_alias                  +FDO
  171.swim:     -fast                     -f77rtl +FDO ONESTEP=yes
  172.mgrid:    -fast -Qansi_alias                  +FDO
  173.applu:    -fast -Qscalar_rep- -Qauto -f77rtl +FDO ONESTEP=yes
  177.mesa:     -fast                               +FDO ONESTEP=yes
  178.galgel:   -fast                               +FDO ONESTEP=yes
  179.art:      basepeak=1
  183.equake:   -fast -Oa -Qrcd                     +FDO ONESTEP=yes shlw32M.lib
  187.facerec:  -fast -Qunroll1 -Qscalar_rep- -fpp +FDO ONESTEP=yes
  188.ammp:     basepeak=1
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  189.lucas:    -fast
  191.fma3d:    basepeak=1
  200.sixtrack: -fast                                  +FDO
  301.apsi:             basepeak=1
BIOS Configuration Notes
  Hyper-Threading Technology disabled
Other Configuration Notes
  /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```