CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML570 G3 (3.0GHz, Intel dual-core Xeon)

SPECint_rate2000 = 105

SPECint_rate_base2000 = 104

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Sep-2005 | Hardware Avail: Oct-2005 | Software Avail: Jun-2005

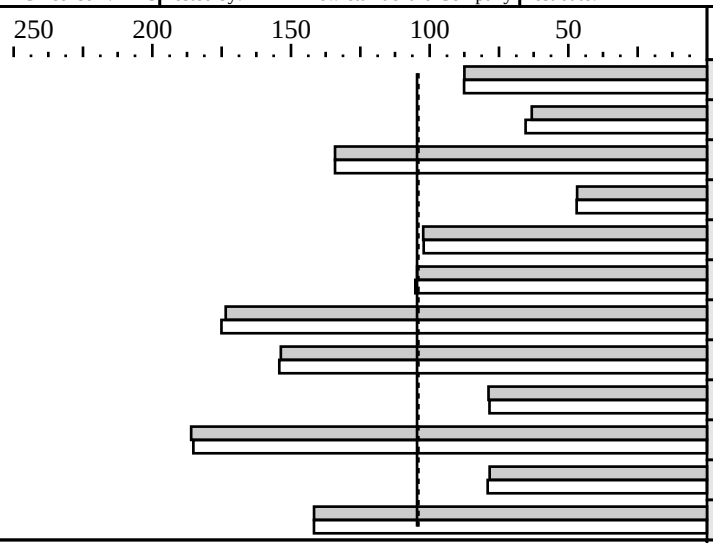

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	8	149	87.5	8	148	87.6
175.vpr	8	206	63.2	8	199	65.4
176.gcc	8	76.1	134	8	76.1	134
181.mcf	8	357	46.8	8	355	47.0
186.crafty	8	90.7	102	8	90.8	102
197.parser	8	160	105	8	159	105
252.eon	8	69.5	174	8	68.9	175
253.perlbmk	8	109	154	8	108	154
254.gap	8	130	78.8	8	130	78.4
255.vortex	8	94.8	186	8	95.2	185
256.bzip2	8	178	78.4	8	176	79.1
300.twolf	8	196	142	8	196	142

Hardware

CPU:	Intel dual-core Xeon (3.0GHz, 2x2MB L2, 667MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD (on chip) per core
Secondary Cache:	2048KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16x1024MB PC2-3200
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.0 Build 20050624Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning for C programs:   -fast         +FDO  ONESTEP=yes shlw32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO  ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:     -fast               +FDO  ONESTEP=yes
  175.vpr:      -fast               +FDO  ONESTEP=yes
  176.gcc:      basepeak = 1
  181.mcf:      -fast               +FDO  ONESTEP=yes shlw32M.lib
  186.crafty:   -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  197.parser:   -fast               +FDO  ONESTEP=yes
  252.eon:      -fast               +FDO
  253.perlbmk:  -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  254.gap:      -fast               +FDO  ONESTEP=yes
  255.vortex:   -fast               +FDO  ONESTEP=yes shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    256.bzip2:    -fast -Oa -Qunroll1 +FDO  ONESTEP=yes shlw32M.lib
    300.twolf:    -fast               +FDO              shlw32M.lib
  BIOS Configuration Notes
    Hyper-Threading Technology disabled
```