CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V890 (8 processor)

SPECint_rate2000 = 174

SPECint_rate_base2000 = 156

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Oct-2005 | Hardware Avail: Oct-2005 | Software Avail: Nov-2005

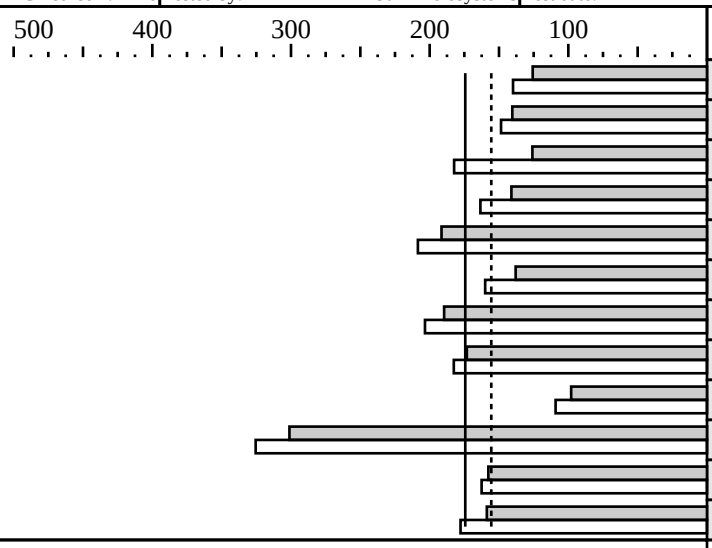

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	16	207	126	16	186	140
175.vpr	16	185	140	16	175	149
176.gcc	16	162	126	16	112	182
181.mcf	16	237	141	16	204	163
186.crafty	16	96.9	191	16	89.0	208
197.parser	16	242	138	16	209	160
252.eon	16	127	190	16	119	203
253.perlbmk	16	193	173	16	183	183
254.gap	16	208	98.0	16	187	109
255.vortex	16	117	301	16	108	325
256.bzip2	16	177	158	16	171	163
300.twolf	16	351	159	16	313	178

Hardware

CPU:	UltraSPARC IV+
CPU MHz:	1500
FPU:	Integrated
CPU(s) enabled:	16 cores, 8 chips, 2 cores/chip
CPU(s) orderable:	2, 4, 8 (order by number of chips)
Parallel:	No
Primary Cache:	64KBI+64KBD per core on chip (128KBI+128KBD on chip)
Secondary Cache:	2MB(I+D) per chip (on chip)
L3 Cache:	32MB(I+D) per chip (off chip)
Other Cache:	None
Memory:	64GB 8-way interleaved
Disk Subsystem:	1x72GB
Other Hardware:	None

Software

Operating System:	Solaris 10
Compiler:	Sun Studio 11
File System:	ufs (default ufs logging on with Solaris 10)
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
    C: cc
  CXX: CC

Integer base flags:
  -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
  ONESTEP=yes and feedback for all benchmarks

  164.gzip:   -x04 -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp+filtering_margin=30,
              -Qeps:do_spec_load=1
  175.vpr:    -fast -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,
              -Qeps:rp_filtering_margin=30 -xipo=2 -xpagesize_stack=8K
              -lmopt -lm
  176.gcc:    -fast -xipo=2 -Wc,-Qicache-chbab=1 -Wc,-Qeps:enabled=1
              -Qeps:ws=32 -Wc,-Qdepgraph-early_cross_call=1
              -Wc,-Qms_pipe-pref_prolog -ll2amm
  181.mcf:    -fast -xipo=2 -xprefetch_level=2
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  186.crafty: -fast -xpagesize=8k -xipo=2 -xalias_level=strong
              -W2,-Ashort_ldst -xinline= -xprefetch -xrestrict
              Feedback adds -xlinkopt during pass2
  197.parser: -fast -xipo=2 -xalias_level=strong -Wc,Qgsched-T6
              -Wc,-Qipa:valuepredicition -Wc,-Qms_pipe-prefstrong=0,
              -Qlp-pt=weak
  252.eon:    -fast -xipo=2 -xalias_level=compatible -Qoption cg
              -Qeps:enabled=1 -xvector -Qoption iropt -Abcopy -xunroll=16
  253.perlbmk:-fast -xipo -Wc,-Qeps:enabled=1,-Qeps:ws=16 -xalias_level=std
              -xsafe=mem -Wc,-Qiselect-funcalign=128,-Qicache-chbab=1
              -Wc,-Qiselect-sw_pf_tbl_th=40,-Qeps:do_spec_load=1
  254.gap:    -fast -W2,-Abcopy -xvector -xprefetch_level=3
  255.vortex: -fast -xrestrict -xipo=2 -Wc,-Qeps:enabled=1
              -W2,-Ainline:recursion=1:cs=400:irs=5000
              -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=64
              -Wc,-Qpeep-Sh0 -W2,-crit -xprefetch=latx:1.7 -fsimple=1
              -Wc,-Qiselect-sw_pf_tbl_th=30 -Wc,-Qicache-chbab=1
              -W2,-Ainline:inc=300 -ll2amm
  256.bzip2:  -fast -xipo=2 -xalias_level=strong -xrestrict
              -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1
  300.twolf:  -fast -xalias_level=strong -xsafe=mem -xipo=2
              -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp -xinline=

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
  PASS1:       -xprofile=collect:./feedback
  PASS2:       -xprofile=use:./feedback

Portability:
  176.gcc:    -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
  186.crafty: -DSUN
  252.eon:    -DFMAX_IS_DOUBLE -library=iostream
  253.perlbmk:-DSPEC_CPU2000_SOLARIS
  254.gap:    -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1
```