CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers
CELSIUS M440, Intel Pentium 4 630

SPECfp2000 = 1750

SPECfp_base2000 = 1735

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Nov-2005 | Hardware Avail: Jul-2005 | Software Avail: Sep-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	64.9	2464	64.9	2466
171.swim	3100	123	2512	123	2526
172.mgrid	1800	131	1371	131	1374
173.applu	2100	145	1446	144	1457
177.mesa	1400	106	1317	106	1318
178.galgel	2900	91.0	3187	90.9	3192
179.art	2600	61.9	4202	61.9	4200
183.equake	1300	49.7	2618	49.4	2630
187.facerec	1900	104	1828	104	1826
188.ammp	2200	207	1063	189	1165
189.lucas	2000	97.3	2055	96.8	2067
191.fma3d	2100	151	1392	151	1393
200.sixtrack	1100	185	594	185	594
301.apsi	2600	218	1194	218	1195

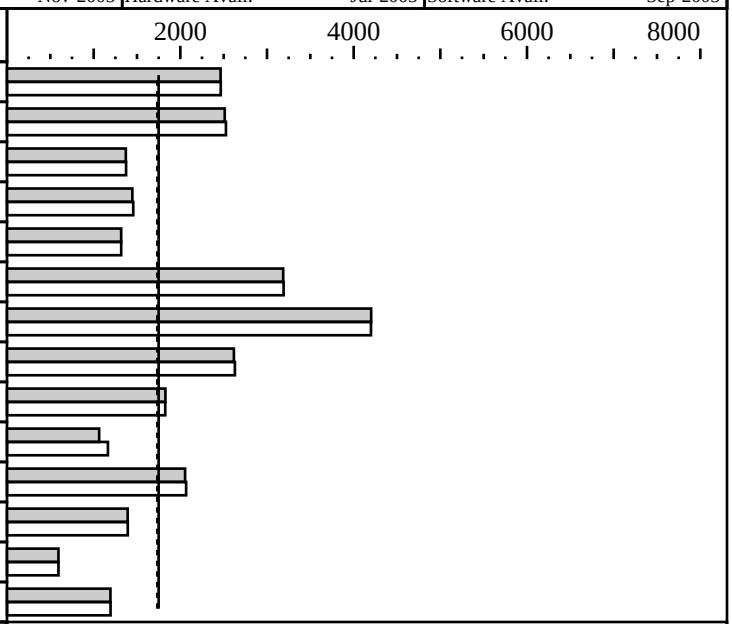

Hardware

CPU:	Intel Pentium 4 processor 630
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 GB (4x1 GB DDR2-533, 2rank, CL4-4-4, with ECC)
Disk Subsystem:	Serial ATA 7200 rpm
Other Hardware:	

Software

Operating System:	Windows XP Professional, Service Pack 2
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.0, - Build 20050912Z Package ID: W_CC_C_9.0.024 Intel(R) Fortran Compiler for 32-bit app., Version 9.0, - Build 20050912Z Package ID: W_FC_C_9.0.024 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library 7.4
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Portability flags:
 178.galgel:  -FI /F32000000

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO shlW32M.lib
 for Fortran programs:
 -fast +FDO shlW32M.lib

Peak Tuning Flags:
 168.wupwise:  -fast +FDO
 171.swim:     -fast +FDO
 172.mgrid:    -fast +FDO
 173.applu:    -fast -Qscalar_rep- -Qauto +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 177.mesa:     -fast +FDO
 178.galgel:   -fast +FDO
 179.art:      -fast +FDO shlW32M.lib
 183.equake:   -fast +FDO shlW32M.lib
 187.facerec:  -fast +FDO
 188.ammp:     -fast +FDO
 189.lucas:    -fast +FDO
 191.fma3d:    -fast +FDO
 200.sixtrack: -fast +FDO
 301.apsi:     -fast +FDO

Extra Libraries:
 shlW32M.lib = Microquill SmartHeap Library 7.4
 see www.microquill.com

The system bus runs at 800 MHz

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```