CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers
CELSIUS M440, Intel Pentium 4 640

SPECfp2000 = 1841

SPECfp_base2000 = 1825

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Nov-2005 | Hardware Avail: Jul-2005 | Software Avail: Sep-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	61.9	2587	61.7	2593
171.swim	3100	122	2537	121	2554
172.mgrid	1800	124	1452	123	1463
173.applu	2100	138	1517	137	1533
177.mesa	1400	99.8	1403	99.8	1403
178.galgel	2900	85.6	3386	85.6	3387
179.art	2600	59.1	4402	59.1	4402
183.equake	1300	47.3	2750	47.6	2729
187.facerec	1900	98.0	1939	98.5	1930
188.ammp	2200	196	1120	179	1228
189.lucas	2000	92.9	2154	92.1	2172
191.fma3d	2100	144	1460	143	1469
200.sixtrack	1100	174	633	174	633
301.apsi	2600	206	1262	206	1265

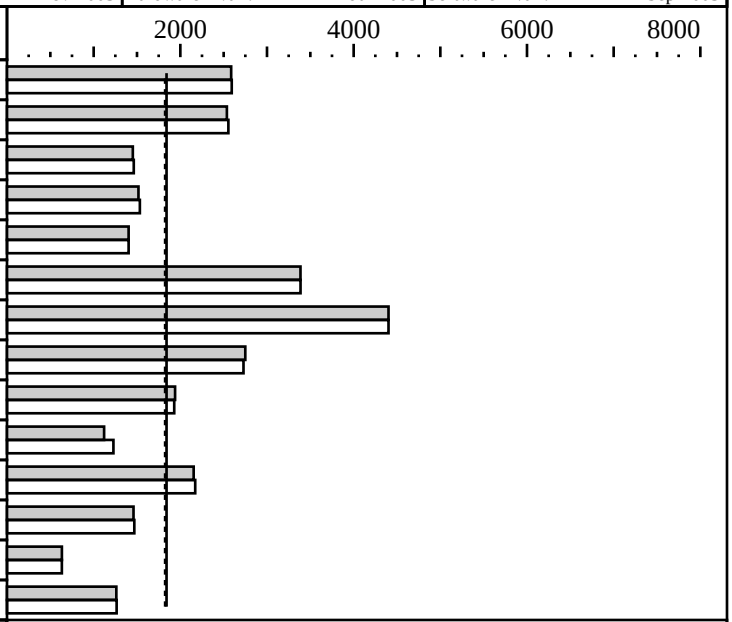

Hardware

CPU:	Intel Pentium 4 processor 640
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 GB (4x1 GB DDR2-533, 2rank, CL4-4-4, with ECC)
Disk Subsystem:	Serial ATA 7200 rpm
Other Hardware:	

Software

Operating System:	Windows XP Professional, Service Pack 2
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.0, - Build 20050912Z Package ID: W_CC_C_9.0.024 Intel(R) Fortran Compiler for 32-bit app., Version 9.0, - Build 20050912Z Package ID: W_FC_C_9.0.024 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library 7.4
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Portability flags:
 178.galgel:  -FI /F32000000

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO shlW32M.lib
 for Fortran programs:
 -fast +FDO shlW32M.lib

Peak Tuning Flags:
 168.wupwise:  -fast +FDO
 171.swim:     -fast +FDO
 172.mgrid:    -fast +FDO
 173.applu:    -fast -Qscalar_rep- -Qauto +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 177.mesa:     -fast +FDO
 178.galgel:   -fast +FDO
 179.art:      -fast +FDO shlW32M.lib
 183.equake:   -fast +FDO shlW32M.lib
 187.facerec:  -fast +FDO
 188.ammp:     -fast +FDO
 189.lucas:    -fast +FDO
 191.fma3d:    -fast +FDO
 200.sixtrack: -fast +FDO
 301.apsi:     -fast +FDO

Extra Libraries:
 shlW32M.lib = Microquill SmartHeap Library 7.4
 see www.microquill.com

The system bus runs at 800 MHz

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```