CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers
CELSIUS M440, Intel Pentium 4 650

SPECfp2000 = 1921

SPECfp_base2000 = 1904

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Dec-2005 | Hardware Avail: Jul-2005 | Software Avail: Sep-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	59.4	2695	59.2	2703
171.swim	3100	121	2566	120	2586
172.mgrid	1800	118	1524	117	1534
173.applu	2100	133	1580	131	1597
177.mesa	1400	94.0	1489	94.0	1489
178.galgel	2900	81.3	3568	81.3	3567
179.art	2600	56.9	4566	56.9	4569
183.equake	1300	45.9	2833	46.1	2822
187.facerec	1900	93.6	2030	93.8	2025
188.ammp	2200	188	1168	171	1287
189.lucas	2000	89.7	2231	89.6	2233
191.fma3d	2100	138	1523	137	1533
200.sixtrack	1100	164	672	164	672
301.apsi	2600	196	1327	196	1329

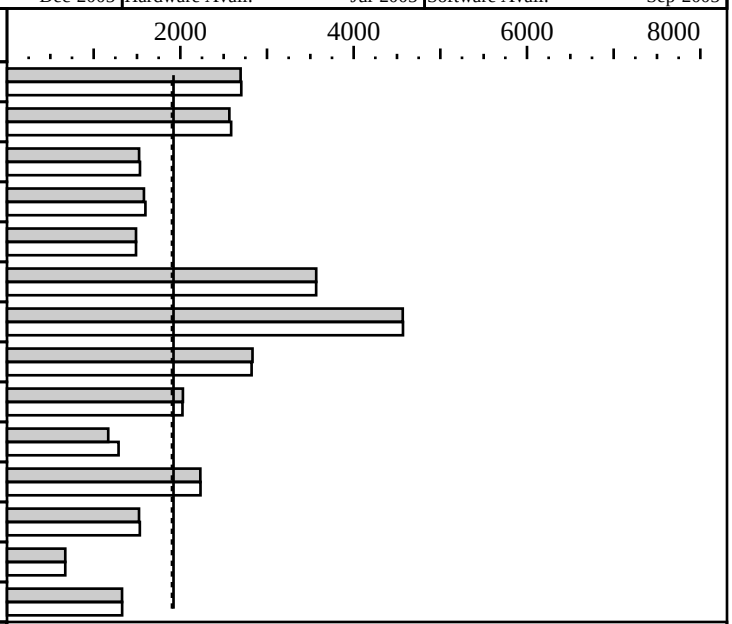

Hardware

CPU:	Intel Pentium 4 processor 650
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 GB (4x1 GB DDR2-533, 2rank, CL4-4-4, with ECC)
Disk Subsystem:	Serial ATA 7200 rpm
Other Hardware:	

Software

Operating System:	Windows XP Professional, Service Pack 2
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.0, - Build 20050912Z Package ID: W_CC_C_9.0.024 Intel(R) Fortran Compiler for 32-bit app., Version 9.0, - Build 20050912Z Package ID: W_FC_C_9.0.024 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library 7.4
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Portability flags:
 178.galgel:  -FI /F32000000

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO shlW32M.lib
 for Fortran programs:
 -fast +FDO shlW32M.lib

Peak Tuning Flags:
 168.wupwise:  -fast +FDO
 171.swim:     -fast +FDO
 172.mgrid:    -fast +FDO
 173.applu:    -fast -Qscalar_rep- -Qauto +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 177.mesa:     -fast +FDO
 178.galgel:   -fast +FDO
 179.art:      -fast +FDO shlW32M.lib
 183.equake:   -fast +FDO shlW32M.lib
 187.facerec:  -fast +FDO
 188.ammp:     -fast +FDO
 189.lucas:    -fast +FDO
 191.fma3d:    -fast +FDO
 200.sixtrack: -fast +FDO
 301.apsi:     -fast +FDO

Extra Libraries:
 shlW32M.lib = Microquill SmartHeap Library 7.4
 see www.microquill.com

The system bus runs at 800 MHz

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```