CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER250 (1980MHz)

SPECint2000 = 1430

SPECint_base2000 = 1356

SPEC license #: 19 | Tested by: Fujitsu Limited | Test date: Dec-2005 | Hardware Avail: Feb-2006 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	131	1072	129	1082
175.vpr	1400	118	1184	116	1210
176.gcc	1100	88.1	1249	73.1	1506
181.mcf	1800	148	1217	127	1417
186.crafty	1000	68.6	1458	65.8	1521
197.parser	1800	156	1157	143	1258
252.eon	1300	85.9	1514	83.1	1564
253.perlbmk	1800	126	1425	125	1437
254.gap	1100	94.9	1159	89.4	1230
255.vortex	1900	73.4	2590	71.9	2641
256.bzip2	1500	120	1247	118	1274
300.twolf	3000	204	1472	204	1472

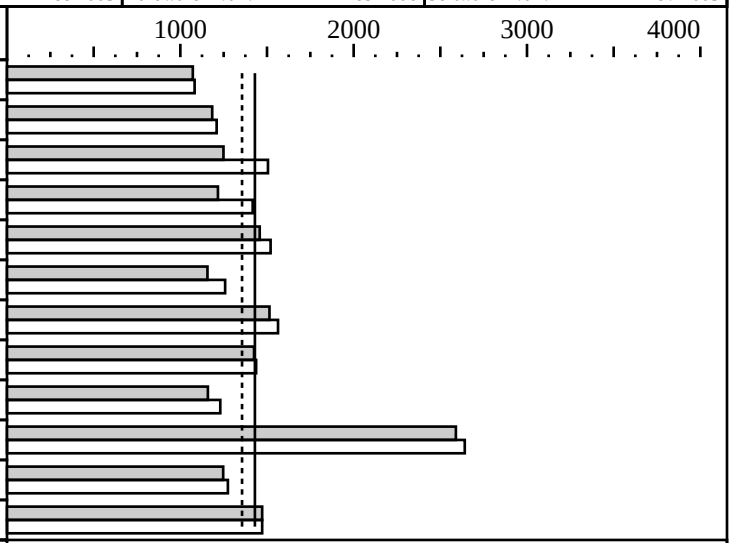

Hardware

CPU:	SPARC64 V
CPU MHz:	1980
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1 to 2 (increments of 1)
Parallel:	None
Primary Cache:	128KBI + 128KBD on chip
Secondary Cache:	3MB(I+D) on chip
L3 Cache:	None
Other Cache:	None
Memory:	8GB (1GB x 8)
Disk Subsystem:	1 x 36.4GB SCSI (10000rpm)
Other Hardware:	None

Software

Operating System:	Solaris 10
Compiler:	Sun Studio 11
File System:	ufs
System State:	multi user

Notes/Tuning Information

```
FDO: (for Sun Studio 11)
fdo_pre0=rm -rf ./feedback.profile ./SunWS_cache
PASS1=-xprofile=collect:./feedback
PASS2=-xprofile=use:./feedback

Integer base flags:
(using C compiler of Sun Studio 11)
-fast -xtarget=ultra3cu -xipo=2 ONESTEP=yes FDO
(using C++ compiler of Sun Studio 11)
-fast -xipo=2 ONESTEP=yes FDO

Integer peak flags:
(using C compiler of Sun Studio 11)
164.gzip:     -xarch=v8plusb -xchip=ultra2 -xcache=128/64/2:4096/64/4
              -xalias_level=std -xipo=2 -W2,-whole -xO5 ONESTEP=yes FDO
175.vpr:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=std -xchip=ultra2 -xipo=2 ONESTEP=yes FDO
176.gcc:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -ll2amm ONESTEP=yes FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
181.mcf:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xprefetch_level=3 -W2,-Apf:llist=3:noinnerllist
              ONESTEP=yes FDO
186.crafty:   -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=strong -xipo=2 -xpagesize=512K -W2,-Ashort_ldst
              ONESTEP=yes FDO
197.parser:   -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=strong -xipo=2 -Wc,-Qgsched-T6,
              -Qgsched-trace_late=1,-Qipa:valueprediction ONESTEP=yes FDO
253.perlbmk:  -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xalias_level=std ONESTEP=yes FDO
254.gap:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=strong -xipo=2 -xprefetch_level=3 -xvector
              -W2,-Abcopy ONESTEP=yes FDO
255.vortex:   -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xrestrict -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
              -Wc,-Qdepgraph-early_cross_call=1 -ll2amm ONESTEP=yes FDO
256.bzip2:    -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xalias_level=strong -xrestrict ONESTEP=yes FDO
300.twolf:    -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 ONESTEP=yes FDO

(using C++ compiler of Sun Studio 11)
252.eon:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -noex -xalias_level=compatible -xipo=2
              -Qoption cg -Qeps:enabled=1,-Qeps:ws=32 ONESTEP=yes FDO

Portability:
176.gcc:      -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
186.crafty:   -DSUN
253.perlbmk:  -DSPEC_CPU2000_SOLARIS
254.gap:      -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

System Tunables:
(for /etc/system)
      set consistent_coloring=1
      set tune_t_fsflushr=86400
      set autoup=86400

Shell Environments:
      Stack size set to unlimited via "ulimit -s unlimited"
      MPSSHEAP=4M
      MPSSSTACK=4M
      LD_PRELOAD=mpss.so.1

System board used with only ONE CPU present.

Sun Studio 11, posted at URL http://www.sun.com/software/products/studio/index.xml
was used for this submission.
```