CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

IBM System p5 560Q (1500 MHz, 16 CPU)

SPECfp_rate2000 = 368

SPECfp_rate_base2000 = 360

SPEC license #: 11 | Tested by: IBM | Test date: Dec-2005 | Hardware Avail: Feb-2006 | Software Avail: Feb-2006

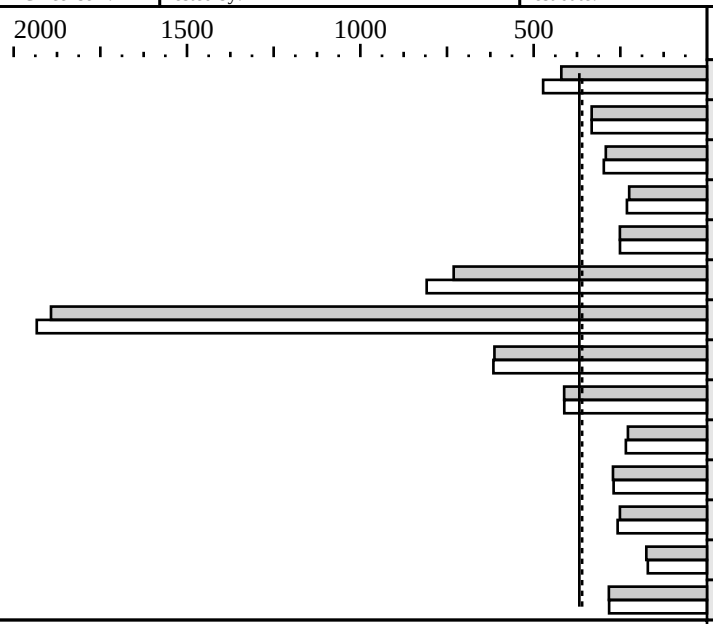

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	32	141	420	32	126	473
171.swim	32	346	333	32	346	333
172.mgrid	32	229	292	32	224	298
173.applu	32	347	224	32	337	231
177.mesa	32	207	251	32	207	251
178.galgel	32	147	731	32	133	809
179.art	32	51.0	1892	32	49.9	1933
183.equake	32	78.7	613	32	78.3	616
187.facerec	32	171	412	32	171	412
188.ammp	32	358	228	32	349	234
189.lucas	32	274	271	32	276	269
191.fma3d	32	310	251	32	302	258
200.sixtrack	32	233	175	32	239	171
301.apsi	32	341	283	32	342	282

Hardware

CPU:	POWER5+
CPU MHz:	1500
FPU:	Integrated
CPU(s) enabled:	16 cores, 8 chips, 2 cores/chip (SMT on)
CPU(s) orderable:	8,16
Parallel:	No
Primary Cache:	64KBI+32KBD (on chip)/core
Secondary Cache:	1920KB unified, shared (on chip)/chip
L3 Cache:	2x36MB unified (off-chip)/QCM, 2 QCMs/SUT
Other Cache:	None
Memory:	32x2GB
Disk Subsystem:	2x36GB SCSI, 15K RPM
Other Hardware:	None

Software

Operating System:	AIX 5L V5.3
Compiler:	XL C/C++ Enterprise Edition Version 8.0 for AIX XL Fortran Enterprise Edition Version 10.1 for AIX Other Software: ESSL 4.2.0.3
File System:	AIX/JFS2
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
     -qfixed used in:        168.wupwise, 171.swim, 172.mgrid, 173.applu,
                             178.galgel, 200.sixtrack, 301.apsi
     -qsuffix=f=f90 used in: 178.galgel, 187.facerec, 189.lucas, 191.fma3d

Base Optimization Flags:
  Fortran:    -O5 -lhmu -blpdata -lmass
  C:          -qpdf1/pdf2
              -O5 -blpdata -qalign=natural

Peak Optimization Flags
  168.wupwise:  -O5 -qsave -blpdata -lhmu -lmass
  171.swim:     basepeak=1
  172.mgrid:    -qpdf1/pdf2
                -O4 -qipa=partition=large -q64 -blpdata
  173.applu:    -O5 -qarch=pwr3 -qtune=pwr3 -qalign=struct=natural -qfdpr -q64 -blpdata
                 fdpr -q -O3
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  177.mesa:      -qpdf1/pdf2
                  -O5 -qfdpr
                  fdpr -q -O3
  178.galgel:    -qpdf1/pdf2
                 -O5 -qfdpr -lhmu -blpdata -lmass -qessl -lessl
                 fdpr -q -O3
  179.art:       -qpdf1/pdf2
                 -O5 -qhot=arraypad -Q -qalign=natural -blpdata -lhmu
  183.equake:    -qpdf1/pdf2
                 -O3 -qarch=auto -qtune=auto -qipa=level=2 -blpdata
  187.facerec:   -O5 -qsave -blpdata
  188.ammp:      -O5 -qalign=natural -qfdpr -blpdata -lhmu
                 fdpr -q -O3
  189.lucas:     -O3 -qarch=auto -qtune=auto -qfdpr -blpdata -qessl -lessl
                 fdpr -q -O3
  191.fma3d:     -qpdf1/pdf2
                -O3 -qarch=auto -qtune=auto -qipa=level=2 -q64 -lhmu -blpdata -lmass
  200.sixtrack:  -qpdf1/pdf2
                 -O4 -qfdpr
                 fdpr -q -O3
  301.apsi:      -O5
```

The installed OS level is AIX 5L for POWER version 5.3 with the 5300-04 Recommended Technology Level.

SMT: Acronym for "Simultaneous Multi-Threading". A processor technology that allows the simultaneous execution of multiple thread contexts within a single processor core. (Enabled by default)
QCM: Acronym for "Quad-Core Module" (Two dual-core processor chips + two L3-cache chips)
SUT: Acronym for "System Under Test"
ESSL: Engineering and Scientific Subroutine Library

ANSI C89: IBM XL C for AIX invoked as xlc
Fortran 77: IBM XL Fortran for AIX invoked as xlf90
Fortran 90: IBM XL Fortran for AIX invoked as xlf90

ulimits set to unlimited.
Large page mode and memory affinity were set as follows:

```
    vmo -r -o lgpg_regions=2400 -o lgpg_size=16777216
    chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE $USER
    shutdown -rF
    export MEMORY_AFFINITY=MCM
```

The following config-file entry was used to assign each benchmark process to a core:

```
     submit = bindprocessor $$ $SPECUSERNUM; $command
```

The "bindprocessor" AIX command binds a process to a CPU core.