CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Ultra 45

SPECint_rate2000 = 20.2

SPECint_rate_base2000 = 18.1

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Feb-2006 | Hardware Avail: Jan-2006 | Software Avail: Jan-2006

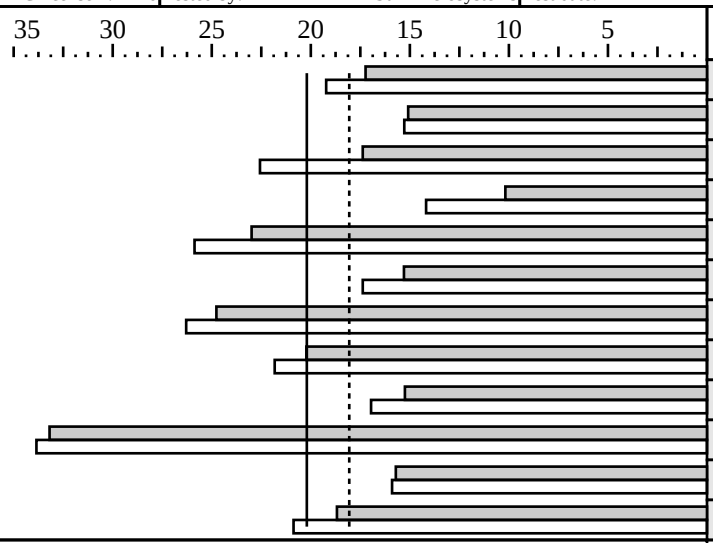

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	188	17.2	2	169	19.2
175.vpr	2	215	15.1	2	213	15.3
176.gcc	2	147	17.4	2	113	22.6
181.mcf	2	410	10.2	2	294	14.2
186.crafty	2	101	23.0	2	89.7	25.9
197.parser	2	273	15.3	2	240	17.4
252.eon	2	122	24.8	2	115	26.3
253.perlbmk	2	206	20.2	2	191	21.8
254.gap	2	167	15.3	2	150	17.0
255.vortex	2	133	33.2	2	130	33.9
256.bzip2	2	222	15.7	2	219	15.9
300.twolf	2	373	18.7	2	333	20.9

Hardware

CPU:	UltraSPARC IIIi
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1,2 (order by # of chips)
Parallel:	No
Primary Cache:	32KBI+64KBD per chip (on chip)
Secondary Cache:	1MB(I+D) per chip (on chip)
L3 Cache:	None
Other Cache:	None
Memory:	16GB(8x2GB DIMMs)
Disk Subsystem:	SATA,250GB,7200 RPM
Other Hardware:	None

Software

Operating System:	Solaris 10 1/06
Compiler:	Sun Studio 11
File System:	ufs (default ufs logging on with Solaris 10)
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
    C: cc
  CXX: CC

Integer base flags:
  -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
  ONESTEP=yes for all benchmarks
  Profile feedback used for those marked with +FDO

  164.gzip:   -x04 -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp+filtering_margin=30,
              -Qeps:do_spec_load=1 +FDO
  175.vpr:    -fast -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,
              -Qeps:rp_filtering_margin=30 -xipo=2 -xpagesize_stack=8K
              -lmopt -lm +FDO
  176.gcc:    -fast -xipo=2 -Wc,-Qicache-chbab=1 -Wc,-Qeps:enabled=1
              -Qeps:ws=32 -Wc,-Qdepgraph-early_cross_call=1
              -Wc,-Qms_pipe-pref_prolog -ll2amm +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  181.mcf:    -fast -xipo=2 -xprefetch_level=3 -Wc,-Qeps:enabled=1 -W2,-Apf:llist=3:noinnerllist
  186.crafty: -fast -xpagesize=8k -xipo=2 -xalias_level=strong
              -W2,-Ashort_ldst -xinline= -xprefetch -xrestrict
              +FDO (-xlinkopt during pass2)
  197.parser: -fast -xipo=2 -xalias_level=strong -Wc,Qgsched-T6
              -Wc,-Qipa:valuepredicition -Wc,-Qms_pipe-prefstrong=0,
              -Qlp-pt=weak +FDO
  252.eon:    -fast -xipo=2 -xalias_level=compatible -Qoption cg
              -Qeps:enabled=1 -xvector -Qoption iropt -Abcopy -xunroll=16
              +FDO
  253.perlbmk:-fast -xipo -Wc,-Qeps:enabled=1,-Qeps:ws=16 -xalias_lvel=std
              -xsafe=mem -Wc,-Qiselect-funcalign=128,-Qicache-chbab=1
              -Wc,-Qiselect-sw_pf_tbl_th=40,-Qeps:do_spec_load=1 +FDO
  254.gap:    -fast -xipo=2 -xalias_level=strong -xvector -xprefetch_level=3 -W2,-Abcopy +FDO
  255.vortex: -fast -xrestrict -xipo=2 -Wc,-Qeps:enabled=1
              -W2,-Ainline:recursion=1:cs=400:irs=5000
              -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcaligh=64
              -Wc,-Qpeep-Sh0 -W2,-crit -xprefetch=latx:1.7 -fsimple=1
              -Wc,-Qiselect-sw_pf_tbl_th=30 -Wc,-Qicache-chbab=1
              -W2,-Ainline:inc=300 -ll2amm +FDO
  256.bzip2:  -fast -xipo=2 -xalias_level=strong -xrestrict
              -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1 +FDO
  300.twolf:  -fast -xalias_level=strong -xsafe=mem -xipo=2
              -xprefetch=no%auto -Wc,-Qms_pipe_intdivusefp -xinline= +FDO

Feedback is done as follows, unless otherwise noted:
  fdo_pre0:    rm -rf ./feedback.profile ./SunWS_cache
  PASS1:       -xprofile=collect:./feedback
  PASS2:       -xprofile=use:./feedback

Portability:
  176.gcc:    -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
  186.crafty: -DSUN
  253.perlbmk:-DSPEC_CPU2000_SOLARIS
  254.gap:    -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_CALLOC_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind
```