CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4100

SPECfp2000 = 2471

SPECfp_base2000 = 2223

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Mar-2006 | Hardware Avail: May-2006 | Software Avail: Jan-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	52.3	3060	49.9	3205
171.swim	3100	65.6	4725	63.2	4904
172.mgrid	1800	92.7	1942	86.7	2075
173.applu	2100	88.0	2387	79.9	2627
177.mesa	1400	81.5	1718	63.6	2203
178.galgel	2900	81.6	3555	57.5	5042
179.art	2600	105	2478	99.7	2609
183.equake	1300	67.4	1929	62.4	2084
187.facerec	1900	60.5	3142	42.3	4490
188.ammp	2200	139	1587	137	1600
189.lucas	2000	105	1901	105	1901
191.fma3d	2100	108	1937	105	1996
200.sixtrack	1100	129	850	127	865
301.apsi	2600	110	2356	100	2598

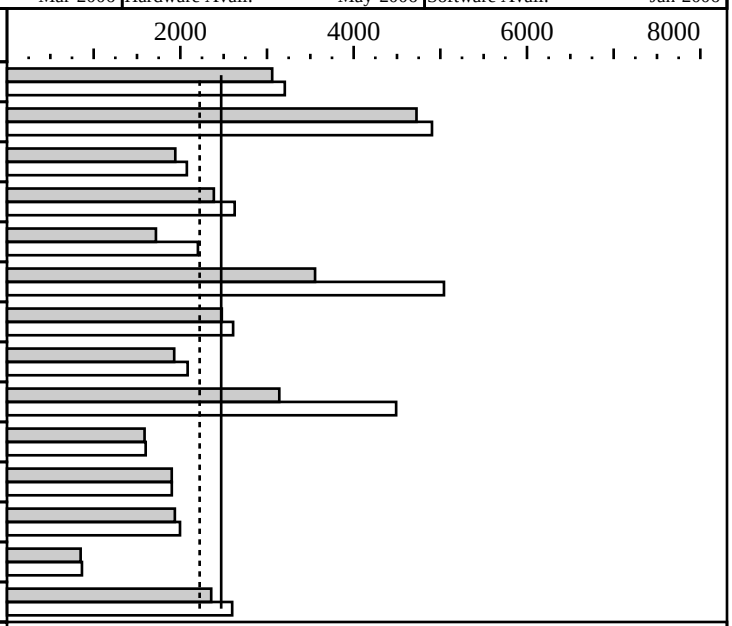

Hardware

CPU:	AMD Opteron (TM) 256
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2 (order by # of chips)
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8GB (4x2GB, PC3200 CL3 DDR ECC Registered SDRAM)
Disk Subsystem:	SAS,36GB,10K RPM
Other Hardware:	None

Software

Operating System:	Solaris 10 1/06
Compiler:	Sun Studio 11
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  F90: f90
  F77: f90

FDO:  PASS1= -xprofile=collect:./feedback PASS2= -xprofile=use:./feedback
      fdo_pre0:  rm -rf ./feedback.profile

Floating point base flags:
  F90:   -fast -xipo=2 -xarch=amd64 -xprefetch_level=3 ONESTEP=yes
    C:   -fast -xcrossfile -xalias_level=std -xpagesize=2m ONESTEP=yes

Floating point peak flags:
 ONESTEP=yes for all benchmarks

 168.wupwise:   -fast -xautopar -xpad=common:3969 -xipo=2 -xarch=amd64 -xprefetch_level=3  -xpagesize_heap=2m
 171.swim:      -fast -xpad=common:3969 -xipo=2 -xvector=simd -xprefetch_level=3 -Qoption iropt
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                  -Atile:skewp,-Ainline:cs=700 -xarch=amd64 -Qoption ube_ipa -inl_alt
                  -xpagesize_stack=2m
 172.mgrid:     -fast -xautopar -stackvar -xpad=common:900 -xipo=2 -xarch=amd64 -xprefetch_level=3
                  -xvector -xpagesize=2m -Qoption ld -M,/usr/lib/ld/map.bssalign
 173.applu:     -fast -xautopar -unroll=5 -stackvar -xO4 -xipo=2 -xprefetch_level=3 -xarch=amd64a
                  -qoption iropt -Rloop_dist -xpagesize_heap=2m
 177.mesa:      -fast -xautopar -xO4 -xipo=2 -Wd,-iropt-prof -xarch=amd64 -xalias_level=strong -xpagesize=2m +FDO
 178.galgel:   -fast -xcache=64/32/4:1024/64/4 -xcrossfile -xpagesize_heap=2m -xprefetch_level=3 -xvector=simd -xarch=amd64
                  RM_SOURCES=lapak.f90
                  EXTRALIBS=-xlic_lib=sunperf
 179.art:         -fast  -xipo=2 -xprefetch  -xalias_level=strong -xpagesize=2m
 183.equake:    -fast -xipo=2 -xprefetch -xalias_level=strong -xpagesize=2m -lmopt -lm +FDO
 187.facerec:     -fast -xO4 -xipo=2 -xprefetch_level=3 -xpagesize=2m
                  RM_SOURCES=cfftb.f90 cffti.f90 cfftf.f90
                  EXTRALIBS=-xlic_lib=sunperf
 188.ammp:      -fast -xcache=64/32/4:1024/64/4 -xO4 -xipo=2 -xarch=amd64a -xalias_level=std -xpagesize_heap=2m -lmopt -lm
 189.lucas:      -fast -Qoption ube_ipa -inl_alt -xipo=2 -xarch=amd64 -xprefetch_level=3
 191.fma3d:       -fast -xcache=64/32/4:1024/64/4 -unroll=5 -fsimple=1 -xipo=2
                  -xprefetch_level=3 -xarch=amd64 -xpagesize_heap=2m +FDO
 200.sixtrack:   -fast -xipo=2 -O -xprefetch_level=3 -xarch=amd64
                  -xpagesize_heap=2m -Qoption ld -M,/usr/lib/ld/map.bssalign +FDO
 301.apsi:        -fast -xO4 -xipo=2 -xprefetch_level=3 -xarch=amd64a -xpagesize=2m

Portability:
 178.galgel:  -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

System was tested in 1 chips configuration

Default BIOS setting was used

This result was measured on the Sun Fire X4200.
Sun Fire X4100 and Sun Fire X4200 are electronically equivalent.
```