CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML350 G5 (3.0GHz, Intel Xeon processor 5160)

SPECint_rate2000 = 61.8

SPECint_rate_base2000 = 61.6

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jun-2006 | Hardware Avail: Jun-2006 | Software Avail: May-2006

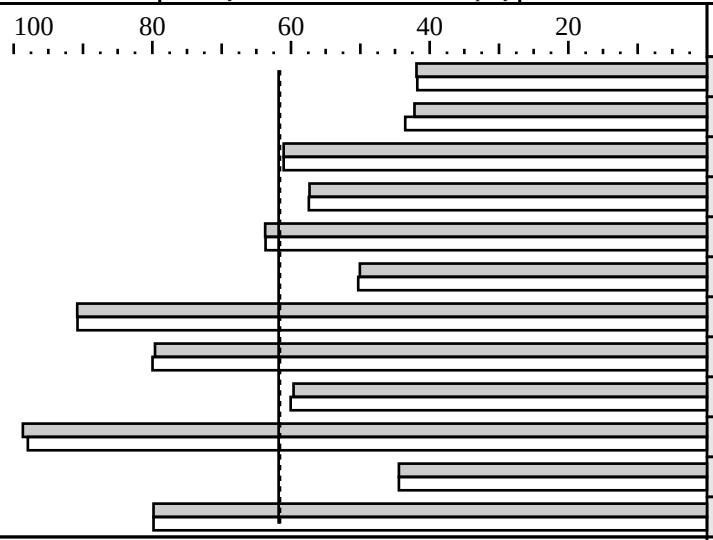

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	77.5	41.9	2	77.7	41.8
175.vpr	2	77.0	42.2	2	74.6	43.5
176.gcc	2	41.8	61.1	2	41.8	61.1
181.mcf	2	72.8	57.3	2	72.7	57.4
186.crafty	2	36.4	63.7	2	36.4	63.7
197.parser	2	83.4	50.1	2	83.0	50.3
252.eon	2	33.2	90.8	2	33.2	90.8
253.perlbmk	2	52.5	79.6	2	52.2	80.0
254.gap	2	42.8	59.6	2	42.5	60.0
255.vortex	2	44.7	98.7	2	45.0	98.0
256.bzip2	2	78.3	44.4	2	78.3	44.4
300.twolf	2	87.2	79.8	2	87.2	79.8

Hardware

CPU:	Intel Xeon processor 5160 (3.0GHz, 4MB L2 shared, 1333MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	32KBI + 32KBD (on chip) per core
Secondary Cache:	4096KB(I+D) (on chip) shared
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC2-5300F
Disk Subsystem:	1x146GB 15K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning for C programs:   -fast         +FDO  ONESTEP=yes shlw32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO  ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:     -fast               +FDO  ONESTEP=yes
  175.vpr:      -fast               +FDO  ONESTEP=yes
  176.gcc:      basepeak=1
  181.mcf:      -fast               +FDO  ONESTEP=yes shlw32M.lib
  186.crafty:   -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  197.parser:   -fast               +FDO  ONESTEP=yes
  252.eon:      -fast               +FDO
  253.perlbmk:  -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  254.gap:      -fast               +FDO  ONESTEP=yes
  255.vortex:   -fast               +FDO  ONESTEP=yes shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    256.bzip2:    basepeak=1
    300.twolf:    -fast               +FDO              shlw32M.lib
  BIOS Configuration Notes
    Power Regulator set to Static High Performance Mode
   Adjacent Sector Prefetch Disabled
```