CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G5 (3.73GHz, Intel Xeon Processor 5080)

SPECfp_rate2000 = 36.6

SPECfp_rate_base2000 = 36.5

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jun-2006 | Hardware Avail: Jun-2006 | Software Avail: May-2006

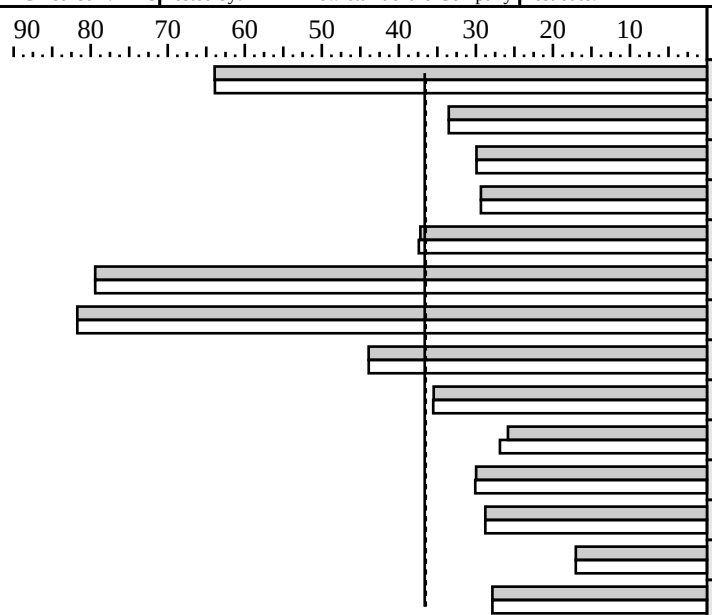

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	58.1	63.9	2	58.1	63.9
171.swim	2	215	33.5	2	215	33.5
172.mgrid	2	140	29.9	2	140	29.9
173.applu	2	166	29.3	2	166	29.3
177.mesa	2	87.3	37.2	2	86.8	37.4
178.galgel	2	84.7	79.4	2	84.7	79.4
179.art	2	73.8	81.7	2	73.8	81.7
183.equake	2	68.7	43.9	2	68.7	43.9
187.facerec	2	124	35.5	2	124	35.5
188.ammp	2	198	25.8	2	190	26.9
189.lucas	2	155	30.0	2	154	30.1
191.fma3d	2	169	28.8	2	169	28.8
200.sixtrack	2	150	17.0	2	150	17.0
301.apsi	2	217	27.9	2	217	27.9

Hardware

CPU:	Intel Xeon Processor 5080 (3.73GHz, 2x2MB L2, 1066MHz bus)
CPU MHz:	3730
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD (on chip) per core
Secondary Cache:	2048KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC2-5300F
Disk Subsystem:	1x36GB 10K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Intel Fortran Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs: -fast -Qansi_alias +FDO
Base tuning for C programs:       -fast              +FDO shlw32M.lib
Portability flags:
  178.galgel: -FI /F32000000
Peak tuning:
  168.wupwise:  -fast -Qansi_alias                 +FDO
  171.swim:     -fast                              +FDO ONESTEP=yes
  172.mgrid:    -fast -Qansi_alias                 +FDO
  173.applu:    basepeak=1
  177.mesa:     -fast                              +FDO ONESTEP=yes
  178.galgel:   basepeak=1
  179.art:      basepeak=1
  183.equake:   -fast -Oa -Qrcd                    +FDO ONESTEP=yes shlw32M.lib
  187.facerec:  -fast -Qunroll1 -Qscalar_rep-       +FDO ONESTEP=yes
  188.ammp:     -fast -Qansi_alias                 +FDO
  189.lucas:    -fast
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    191.fma3d:    basepeak=1
    200.sixtrack: -fast                                +FDO
    301.apsi:     basepeak=1
  BIOS Configuration Notes
    Hyper-Threading Technology disabled
    Power Regulator set to Static High Performance Mode
```