CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G5 (3.73GHz, Intel Xeon processor 5080)

SPECfp_rate2000 = 22.5

SPECfp_rate_base2000 = 22.4

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jun-2006 | Hardware Avail: Jun-2006 | Software Avail: May-2006

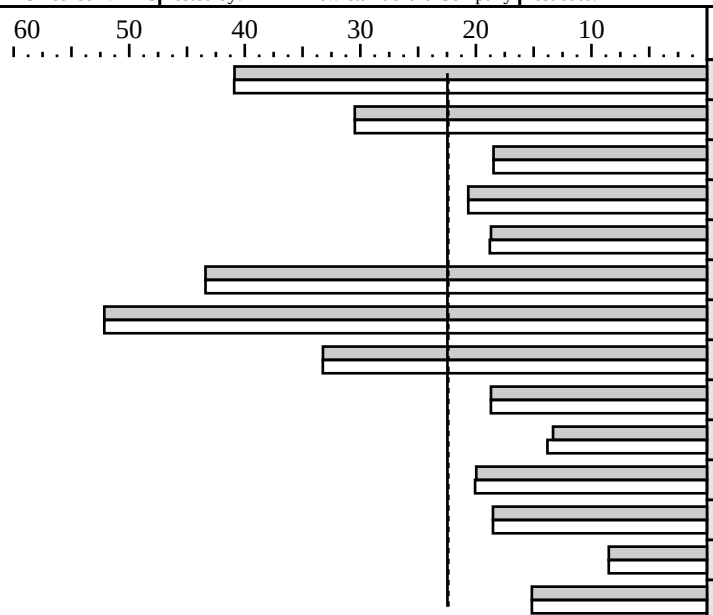

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	45.4	40.9	1	45.4	40.9
171.swim	1	118	30.5	1	118	30.5
172.mgrid	1	113	18.5	1	113	18.5
173.applu	1	118	20.7	1	118	20.7
177.mesa	1	86.9	18.7	1	86.4	18.8
178.galgel	1	77.5	43.4	1	77.5	43.4
179.art	1	57.8	52.2	1	57.8	52.2
183.equake	1	45.4	33.2	1	45.4	33.2
187.facerec	1	118	18.7	1	118	18.7
188.ammp	1	192	13.3	1	185	13.8
189.lucas	1	116	20.0	1	116	20.1
191.fma3d	1	132	18.5	1	132	18.5
200.sixtrack	1	150	8.50	1	150	8.50
301.apsi	1	199	15.2	1	199	15.2

Hardware

CPU:	Intel Xeon processor 5080 (3.73GHz, 2x2MB L2, 1066MHz bus)
CPU MHz:	3730
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD (on chip) per core
Secondary Cache:	2048KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1024MB PC2-5300F
Disk Subsystem:	1x36GB 10K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Intel Fortran Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs: -fast -Qansi_alias +FDO
Base tuning for C programs:       -fast              +FDO shlw32M.lib
Portability flags:
  178.galgel: -FI /F32000000
Peak tuning:
  168.wupwise:  -fast -Qansi_alias                 +FDO
  171.swim:     -fast                              +FDO ONESTEP=yes
  172.mgrid:    -fast -Qansi_alias                 +FDO
  173.applu:    basepeak=1
  177.mesa:     -fast                              +FDO ONESTEP=yes
  178.galgel:   basepeak=1
  179.art:      basepeak=1
  183.equake:   -fast -Oa -Qrcd                    +FDO ONESTEP=yes shlw32M.lib
  187.facerec:  -fast -Qunroll1 -Qscalar_rep-       +FDO ONESTEP=yes
  188.ammp:     -fast -Qansi_alias                 +FDO
  189.lucas:    -fast
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    191.fma3d:    basepeak=1
    200.sixtrack: -fast                                +FDO
    301.apsi:     basepeak=1
  BIOS Configuration Notes
    Power Regulator set to Static High Performance Mode
    Hyper-Threading Technology disabled
```