CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G5 (2.66 GHz, Intel Xeon processor 5150)

SPECint_rate2000 = 56.6

SPECint_rate_base2000 = 56.3

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2006 | Hardware Avail: May-2006 | Software Avail: May-2006

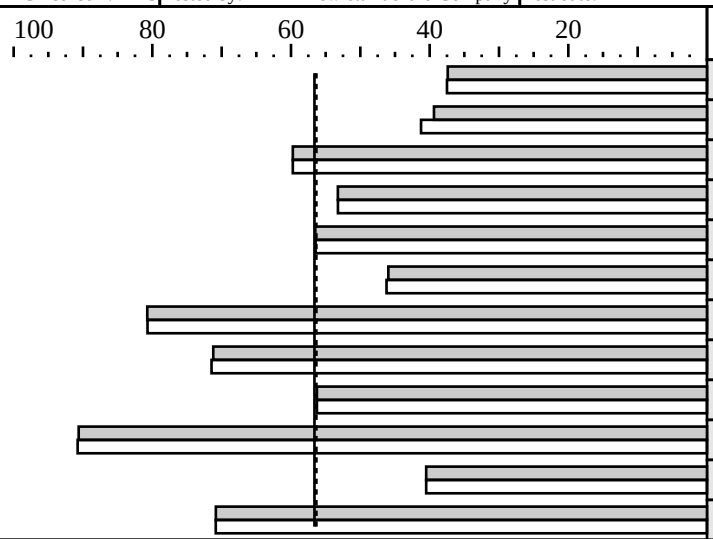

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	86.9	37.4	2	86.6	37.5
175.vpr	2	82.5	39.4	2	78.8	41.2
176.gcc	2	42.7	59.7	2	42.7	59.7
181.mcf	2	78.4	53.2	2	78.5	53.2
186.crafty	2	41.1	56.5	2	41.1	56.5
197.parser	2	90.9	46.0	2	90.3	46.2
252.eon	2	37.4	80.7	2	37.4	80.7
253.perlbmk	2	58.6	71.2	2	58.4	71.5
254.gap	2	45.4	56.3	2	45.4	56.3
255.vortex	2	48.6	90.6	2	48.6	90.8
256.bzip2	2	85.9	40.5	2	85.9	40.5
300.twolf	2	98.3	70.8	2	98.2	70.9

Hardware

CPU:	Intel Xeon processor 5150 (2.66 GHz, 4 MB L2 shared, 1333 MHz bus)
CPU MHz:	2660
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 GB (8x1024 MB PC2-5300F)
Disk Subsystem:	1x36 GB 10 K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning for C programs:   -fast         +FDO  ONESTEP=yes shlw32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO  ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:     -fast               +FDO  ONESTEP=yes
  175.vpr:      -fast               +FDO  ONESTEP=yes
  176.gcc:      basepeak=1
  181.mcf:      -fast               +FDO  ONESTEP=yes shlw32M.lib
  186.crafty:   -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  197.parser:   -fast               +FDO  ONESTEP=yes
  252.eon:      -fast               +FDO
  253.perlbmk:  -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  254.gap:      -fast               +FDO  ONESTEP=yes
  255.vortex:   -fast               +FDO  ONESTEP=yes shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    256.bzip2:    basepeak=1
    300.twolf:    -fast               +FDO              shlw32M.lib
  BIOS Configuration Notes
    Power Regulator set to Static High Performance Mode
    Adjacent Sector Prefetch disabled
```