CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

AMD Opteron LS21 for IBM BladeCenter (AMD Opteron (TM) 2216)

SPECfp2000 = 2057

SPECfp_base2000 = 1864

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Aug-2006 | Hardware Avail: Aug-2006 | Software Avail: Mar-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	62.1	2577	55.5	2882
171.swim	3100	141	2194	106	2923
172.mgrid	1800	107	1675	95.9	1878
173.applu	2100	105	2007	94.8	2215
177.mesa	1400	75.2	1862	70.4	1989
178.galgel	2900	93.0	3119	93.0	3118
179.art	2600	102	2538	77.6	3352
183.equake	1300	82.6	1573	76.1	1709
187.facerec	1900	77.2	2461	74.9	2537
188.ammp	2200	155	1420	148	1482
189.lucas	2000	98.8	2025	84.8	2359
191.fma3d	2100	130	1620	132	1595
200.sixtrack	1100	139	790	131	840
301.apsi	2600	170	1526	159	1639

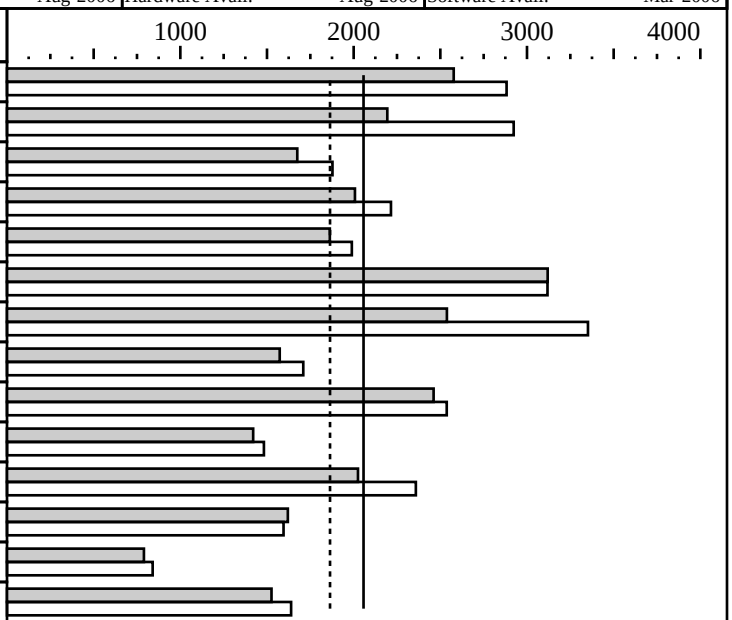

Hardware

CPU:	AMD Opteron 2216
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2GB, PC2-5300
Disk Subsystem:	SAS, 36GB 10K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP3 SLES 64 bit Kernel 2.6.5-7.244-smp
Compiler:	PathScale EKO Compiler Suite, Release 2.4 PathScale EKOPath(TM) Compiler Suite, Release 2.4
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
  +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata

  Baseline optimization
    C programs:       -Ofast -WOPT:mem_opnds=on +FDO
    Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
  Portability Flags:
    178.galgel: -fixedform

 Peak Tuning:
  168.wupwise:  -Ofast -IPA:linear=on -LNO:prefetch_ahead=5:prefetch=3
                -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
  171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
  172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_arith=3:unroll_size=200
                -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
                -WOPT:mem_opnds=on:aggstr=0
  173.applu:    -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
177.mesa:     -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
178.galgel:   -Ofast -OPT:fast_complex=on +FDO
179.art:      -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
183.equake:   -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
187.facerec:  -Ofast -IPA:plimit=1500 -LNO:fusion=2
              -OPT:IEEE_NaN_Inf=off:ro=3:unroll_size=0 +FDO
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
              -GRA:optimize_boundary=on -fno-math-errno -TENV:X=4 +FDO
189.lucas:    -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
191.fma3d:    -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
              -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack: -O3 -OPT:Ofast:early_intrinsics=on
              -fno-math-errno -CG:load_exe=1 +FDO
301.apsi:     -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
```