CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G4 (3.4GHz, Intel Xeon processor 7140M)

SPECint2000 = 1745

SPECint_base2000 = 1736

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2006 | Hardware Avail: Aug-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	122	1150	122	1150
175.vpr	1400	118	1184	115	1214
176.gcc	1100	52.9	2081	52.9	2081
181.mcf	1800	74.7	2411	74.7	2409
186.crafty	1000	78.8	1269	78.7	1271
197.parser	1800	123	1464	123	1468
252.eon	1300	56.3	2310	56.2	2312
253.perlbmk	1800	88.1	2043	86.5	2081
254.gap	1100	63.5	1732	62.6	1757
255.vortex	1900	60.5	3140	60.5	3140
256.bzip2	1500	112	1336	112	1336
300.twolf	3000	175	1717	174	1720

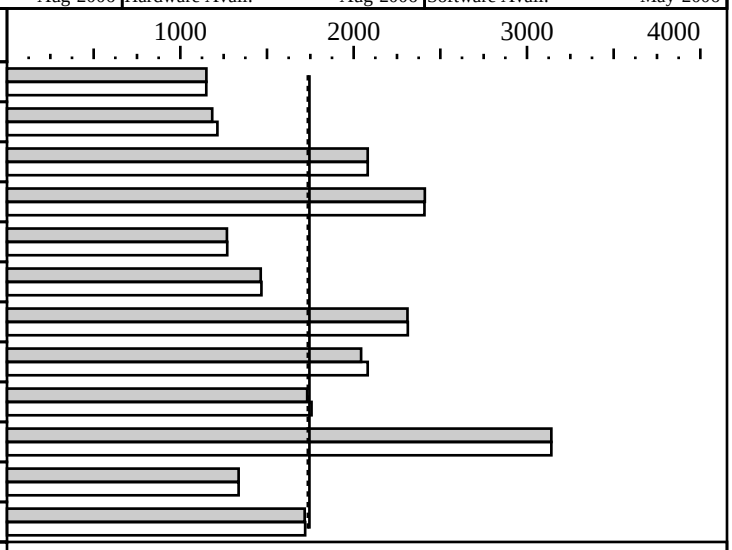

Hardware

CPU:	Intel Xeon processor 7140M (800MHz system bus)
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2,4 chips
Parallel:	No
Primary Cache:	12 K I micro-ops + 16 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	16 MB on chip per chip
Other Cache:	N/A
Memory:	32 GB (16x2048MB PC2-3200 dual-rank)
Disk Subsystem:	1x36 GB 10 K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning for C programs:   -fast         +FDO  ONESTEP=yes shlw32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO  ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:     -fast               +FDO  ONESTEP=yes
  175.vpr:      -fast               +FDO  ONESTEP=yes
  176.gcc:      basepeak=1
  181.mcf:      -fast               +FDO  ONESTEP=yes shlw32M.lib
  186.crafty:   -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  197.parser:   -fast               +FDO  ONESTEP=yes
  252.eon:      -fast               +FDO
  253.perlbmk:  -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  254.gap:      -fast               +FDO  ONESTEP=yes
  255.vortex:   -fast               +FDO  ONESTEP=yes shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    256.bzip2:    basepeak=1
    300.twolf:    -fast                +FDO              shlw32M.lib
  BIOS Configuration Notes
    Hyper-Threading Technology disabled
```