CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

AMD Opteron LS41 for IBM BladeCenter (AMD Opteron (TM) 8218)

SPECfp2000 = 2026

SPECfp_base2000 = 1863

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Aug-2006 | Hardware Avail: Aug-2006 | Software Avail: Mar-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	62.2	2570	56.5	2833
171.swim	3100	122	2548	107	2888
172.mgrid	1800	106	1695	96.3	1869
173.applu	2100	108	1937	95.0	2211
177.mesa	1400	70.3	1991	66.0	2122
178.galgel	2900	92.1	3150	92.7	3127
179.art	2600	116	2234	83.9	3101
183.equake	1300	93.6	1389	84.3	1542
187.facerec	1900	80.1	2373	87.7	2166
188.ammp	2200	151	1452	146	1509
189.lucas	2000	101	1977	85.5	2338
191.fma3d	2100	132	1589	134	1568
200.sixtrack	1100	130	848	122	904
301.apsi	2600	165	1580	153	1695

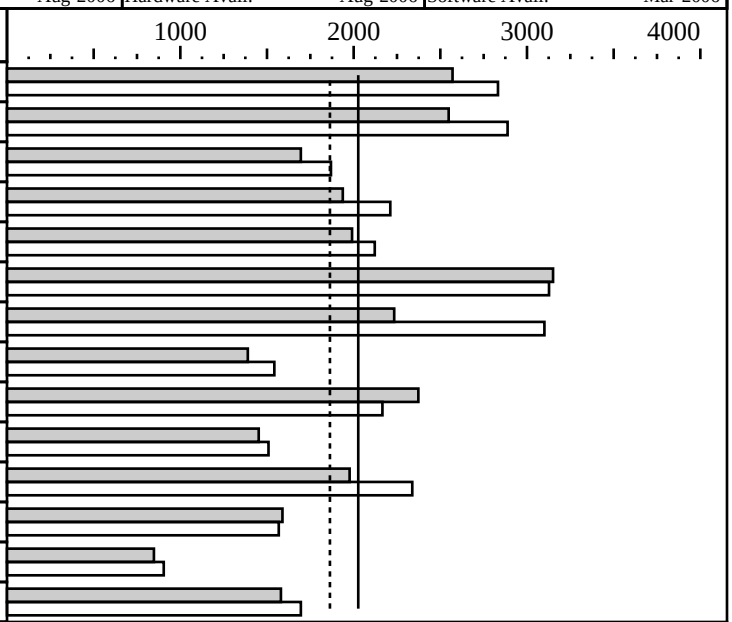

Hardware

CPU:	AMD Opteron 8218
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	1,2,3,4
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16x2GB, PC2-5300
Disk Subsystem:	SAS, 36GB 10K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP3 SLES 64 bit Kernel 2.6.5-7.244-smp
Compiler:	PathScale EKO Compiler Suite, Release 2.4 PathScale EKOPath(TM) Compiler Suite, Release 2.4
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
  +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata

  Baseline optimization
    C programs:       -Ofast -WOPT:mem_opnds=on +FDO
    Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
  Portability Flags:
    178.galgel: -fixedform

 Peak Tuning:
  168.wupwise:  -Ofast -IPA:linear=on -LNO:prefetch_ahead=5:prefetch=3
                -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
  171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
  172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_arith=3:unroll_size=200
                -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
                -WOPT:mem_opnds=on:aggstr=0
  173.applu:    -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
177.mesa:     -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
178.galgel:   -Ofast -OPT:fast_complex=on +FDO
179.art:      -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
183.equake:   -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
187.facerec:  -Ofast -IPA:plimit=1500 -LNO:fusion=2
              -OPT:IEEE_NaN_Inf=off:ro=3:unroll_size=0 +FDO
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
              -GRA:optimize_boundary=on -fno-math-errno -TENV:X=4 +FDO
189.lucas:    -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
191.fma3d:    -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
              -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack: -O3 -OPT:Ofast:early_intrinsics=on
              -fno-math-errno -CG:load_exe=1 +FDO
301.apsi:     -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
```