CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

IBM System p5 550 (2100 Mhz, 4 CPU, SLES)

SPECfp_rate2000 = 143

SPECfp_rate_base2000 = 131

SPEC license #: 11 | Tested by: IBM Austin | Test date: Oct-2006 | Hardware Avail: Aug-2006 | Software Avail: Dec-2006

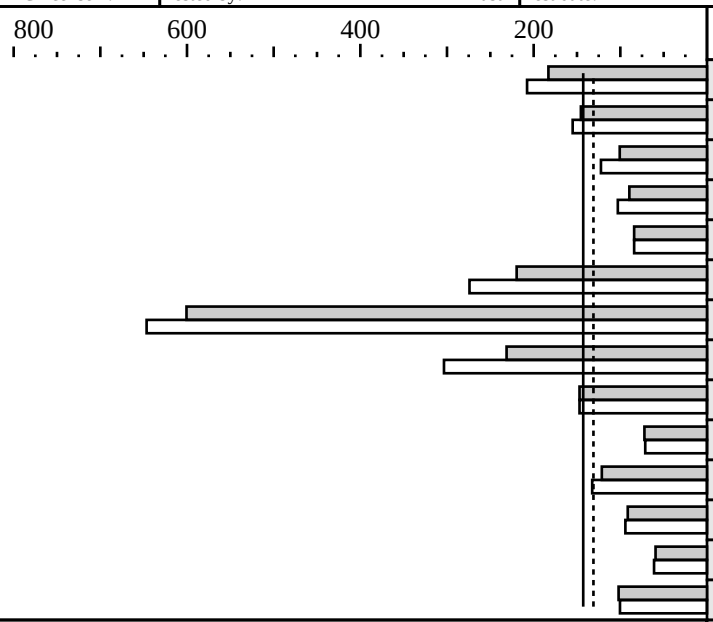

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	8	81.1	183	8	71.5	208
171.swim	8	198	146	8	186	155
172.mgrid	8	166	101	8	137	122
173.applu	8	218	89.6	8	189	103
177.mesa	8	155	84.1	8	155	84.1
178.galgel	8	123	220	8	98.2	274
179.art	8	40.2	601	8	37.3	647
183.equake	8	52.2	231	8	39.8	303
187.facerec	8	120	147	8	120	147
188.ammp	8	283	72.2	8	287	71.2
189.lucas	8	153	121	8	140	132
191.fma3d	8	213	91.4	8	207	94.2
200.sixtrack	8	172	59.4	8	167	61.1
301.apsi	8	237	102	8	240	100

Hardware

CPU:	POWER5+
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip (SMT on)
CPU(s) orderable:	2,4 core
Parallel:	No
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	1920 KB I+D on chip per chip
L3 Cache:	36 MB I+D off chip per chip
Other Cache:	None
Memory:	32 GB (16x2GB)
Disk Subsystem:	1x73GB SCSI, 15K RPM
Other Hardware:	None

Software

Operating System:	SLES SUSE Linux Enterprise Server 10 (ppc) VERSION = 10 w/2.6.16.21-0.8-ppc64 Linux kernel
Compiler:	IBM XL C/C++ Advanced Edition V8.0.1 for Linux IBM XL Fortran Advanced Edition V10.1.1 for Linux Other software: - IBM Engineering and Scientific Subroutine Library (ESSL) for Linux - Version 4.2.5
File System:	reiserfs
System State:	Multi-User

Notes/Tuning Information

```
+FDO
    Feedback directed optimization enabled by:  PASS1=-qpdf1  PASS2=-qpdf2

FP compilers
   C: invoked as xlc
   Fortran 77 and Fortran 90: invoked as xlf90, except as noted below

FP Portability Flags
  -qfixed used in:        168.wupwise, 171.swim, 172.mgrid, 173.applu,
                          178.galgel, 200.sixtrack, 301.apsi
  -qsuffix=f=f90 used in: 178.galgel, 187.facerec, 189.lucas, 191.fma3d

FP Base Optimization Flags:
  C:       +FDO -O5
  Fortran: +FDO -O5
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
Floating Point Peak Flags

168.wupwise
    +FDO -O5 -qsave -lmass
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
171.swim
    +FDO -O5
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
172.mgrid
    +FDO -O4 -q64
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
173.applu
    +FDO -O5 -q64
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
177.mesa
    basepeak=1
178.galgel
    Fortran invoked as xlf90_r
    +FDO -O5 -qessl -lessl -lmass
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
179.art
    +FDO -O5
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
183.equake
    +FDO -O5
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
187.facerec
    basepeak=1
188.ammp
    +FDO -O3 -qalign=linuxppc
189.lucas
    +FDO -O3 -qarch=auto -qtune=auto
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
191.fma3d
    +FDO -O5
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
200.sixtrack
    +FDO -O3 -qarch=auto -qtune=auto
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
301.apsi
    Fortran invoked as xlf90_r
    +FDO -O5 -qessl
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
    extra_libs = -lessl


System Settings:
-- ulimit stack size set to unlimited


SMT: Acronym for 'Simultaneous Multi-Threading'.  A processor technology that allows
     the simultaneous execution of multiple thread contexts within a single processor
     core. SMT is enabled by default.

Large pages reserved as follows by root user:
    echo 240 > /proc/sys/vm/nr_hugepages
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
System configured with libhugetlbfs library for application access to large pages
Environment variables set as follows:
    export HUGETLB_MORECORE=yes


Each process was bound to a cpu using submit= with the taskset command
   submit = taskset -p -c $SPECUSERNUM $$ >/dev/null ; $command
```