CINT2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Bull

NovaScale B280 (Intel Xeon processor E5335, 2.00 GHz)

SPECint2000 = 2107

SPECint_base2000 = 2103

SPEC license #: 20 | Tested by: Bull | Test date: Feb-2007 | Hardware Avail: Jan-2007 | Software Avail: Dec-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	113	1242	113	1240
175.vpr	1400	90.2	1553	88.4	1583
176.gcc	1100	46.0	2393	46.0	2393
181.mcf	1800	55.0	3274	55.0	3274
186.crafty	1000	54.9	1823	54.9	1823
197.parser	1800	108	1661	108	1666
252.eon	1300	50.0	2599	50.0	2599
253.perlbmk	1800	74.8	2408	74.8	2408
254.gap	1100	53.4	2060	53.4	2059
255.vortex	1900	54.0	3519	54.0	3519
256.bzip2	1500	96.8	1549	96.8	1549
300.twolf	3000	129	2330	129	2330

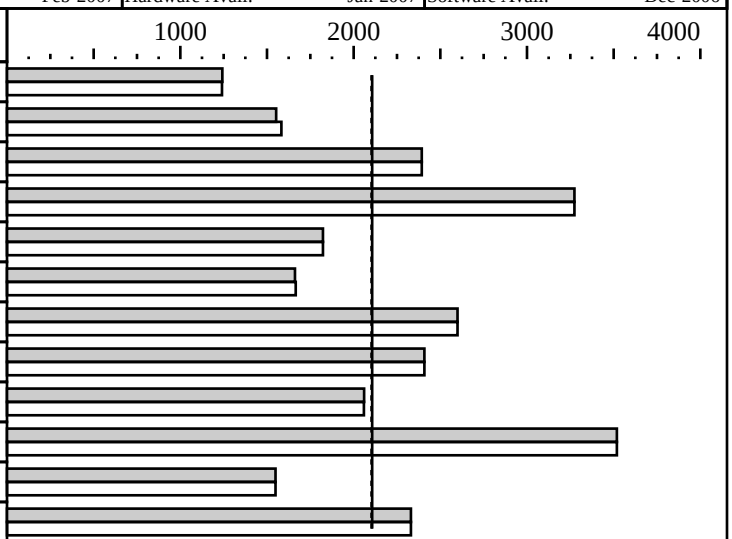

Hardware

CPU:	Intel Xeon Processor E5335 (2.00 GHz, 8MB L2, 1333MHz bus)
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 4 cores/chip
CPU(s) orderable:	1 to 2 chips
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared by 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8GB (1GB DIMMx8, FB-DIMM PC2-5300F ECC CL5)
Disk Subsystem:	1x73GB SAS 10000 rpm
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise Edition (32 bits), Service Pack1
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.1, - Build 20061103Z Package ID: W_CC_C_9.1.033 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library 8.0 (shlW32M.lib)
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Portability flags:
 176.gcc:     -Dalloca=_alloca /F10000000
 186.crafty:  -DNT_i386
 253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
 254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO ONESTEP=yes shlW32M.lib
 for C++ program 252.eon:
 -fast -Qcxx_features +FDO ONESTEP=yes

Peak Tuning Flags:
   164.gzip:     -fast +FDO ONESTEP=yes
   175.vpr:      -fast +FDO ONESTEP=yes
   176.gcc:      basepeak=yes
   181.mcf:      basepeak=yes
```

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
   186.crafty:   basepeak=yes
   197.parser:   -fast +FDO ONESTEP=yes
   252.eon:      basepeak=yes
   253.perlbmk:  basepeak=yes
   254.gap:      -fast +FDO ONESTEP=yes
   255.vortex:   basepeak=yes
   256.bzip2:    basepeak=yes
   300.twolf:    basepeak=yes


 Other Configuration Notes
   /NUMPROC=1 flag was added to boot.ini to invoke
   uniprocessor environment


For information about Bull please see:
http://www.bull.com
```