SPEC® CINT2006 Result

Hewlett-Packard Company

HP Integrity rx4640 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint®2006 = 15.1

SPECint_base2006 = 13.8

CPU2006 license:	03	**Test date:**	Sep-2006
Test sponsor:	Hewlett-Packard Company	**Hardware Availability:**	Sep-2006
Tested by:	Hewlett-Packard Company	**Software Availability:**	Sep-2006

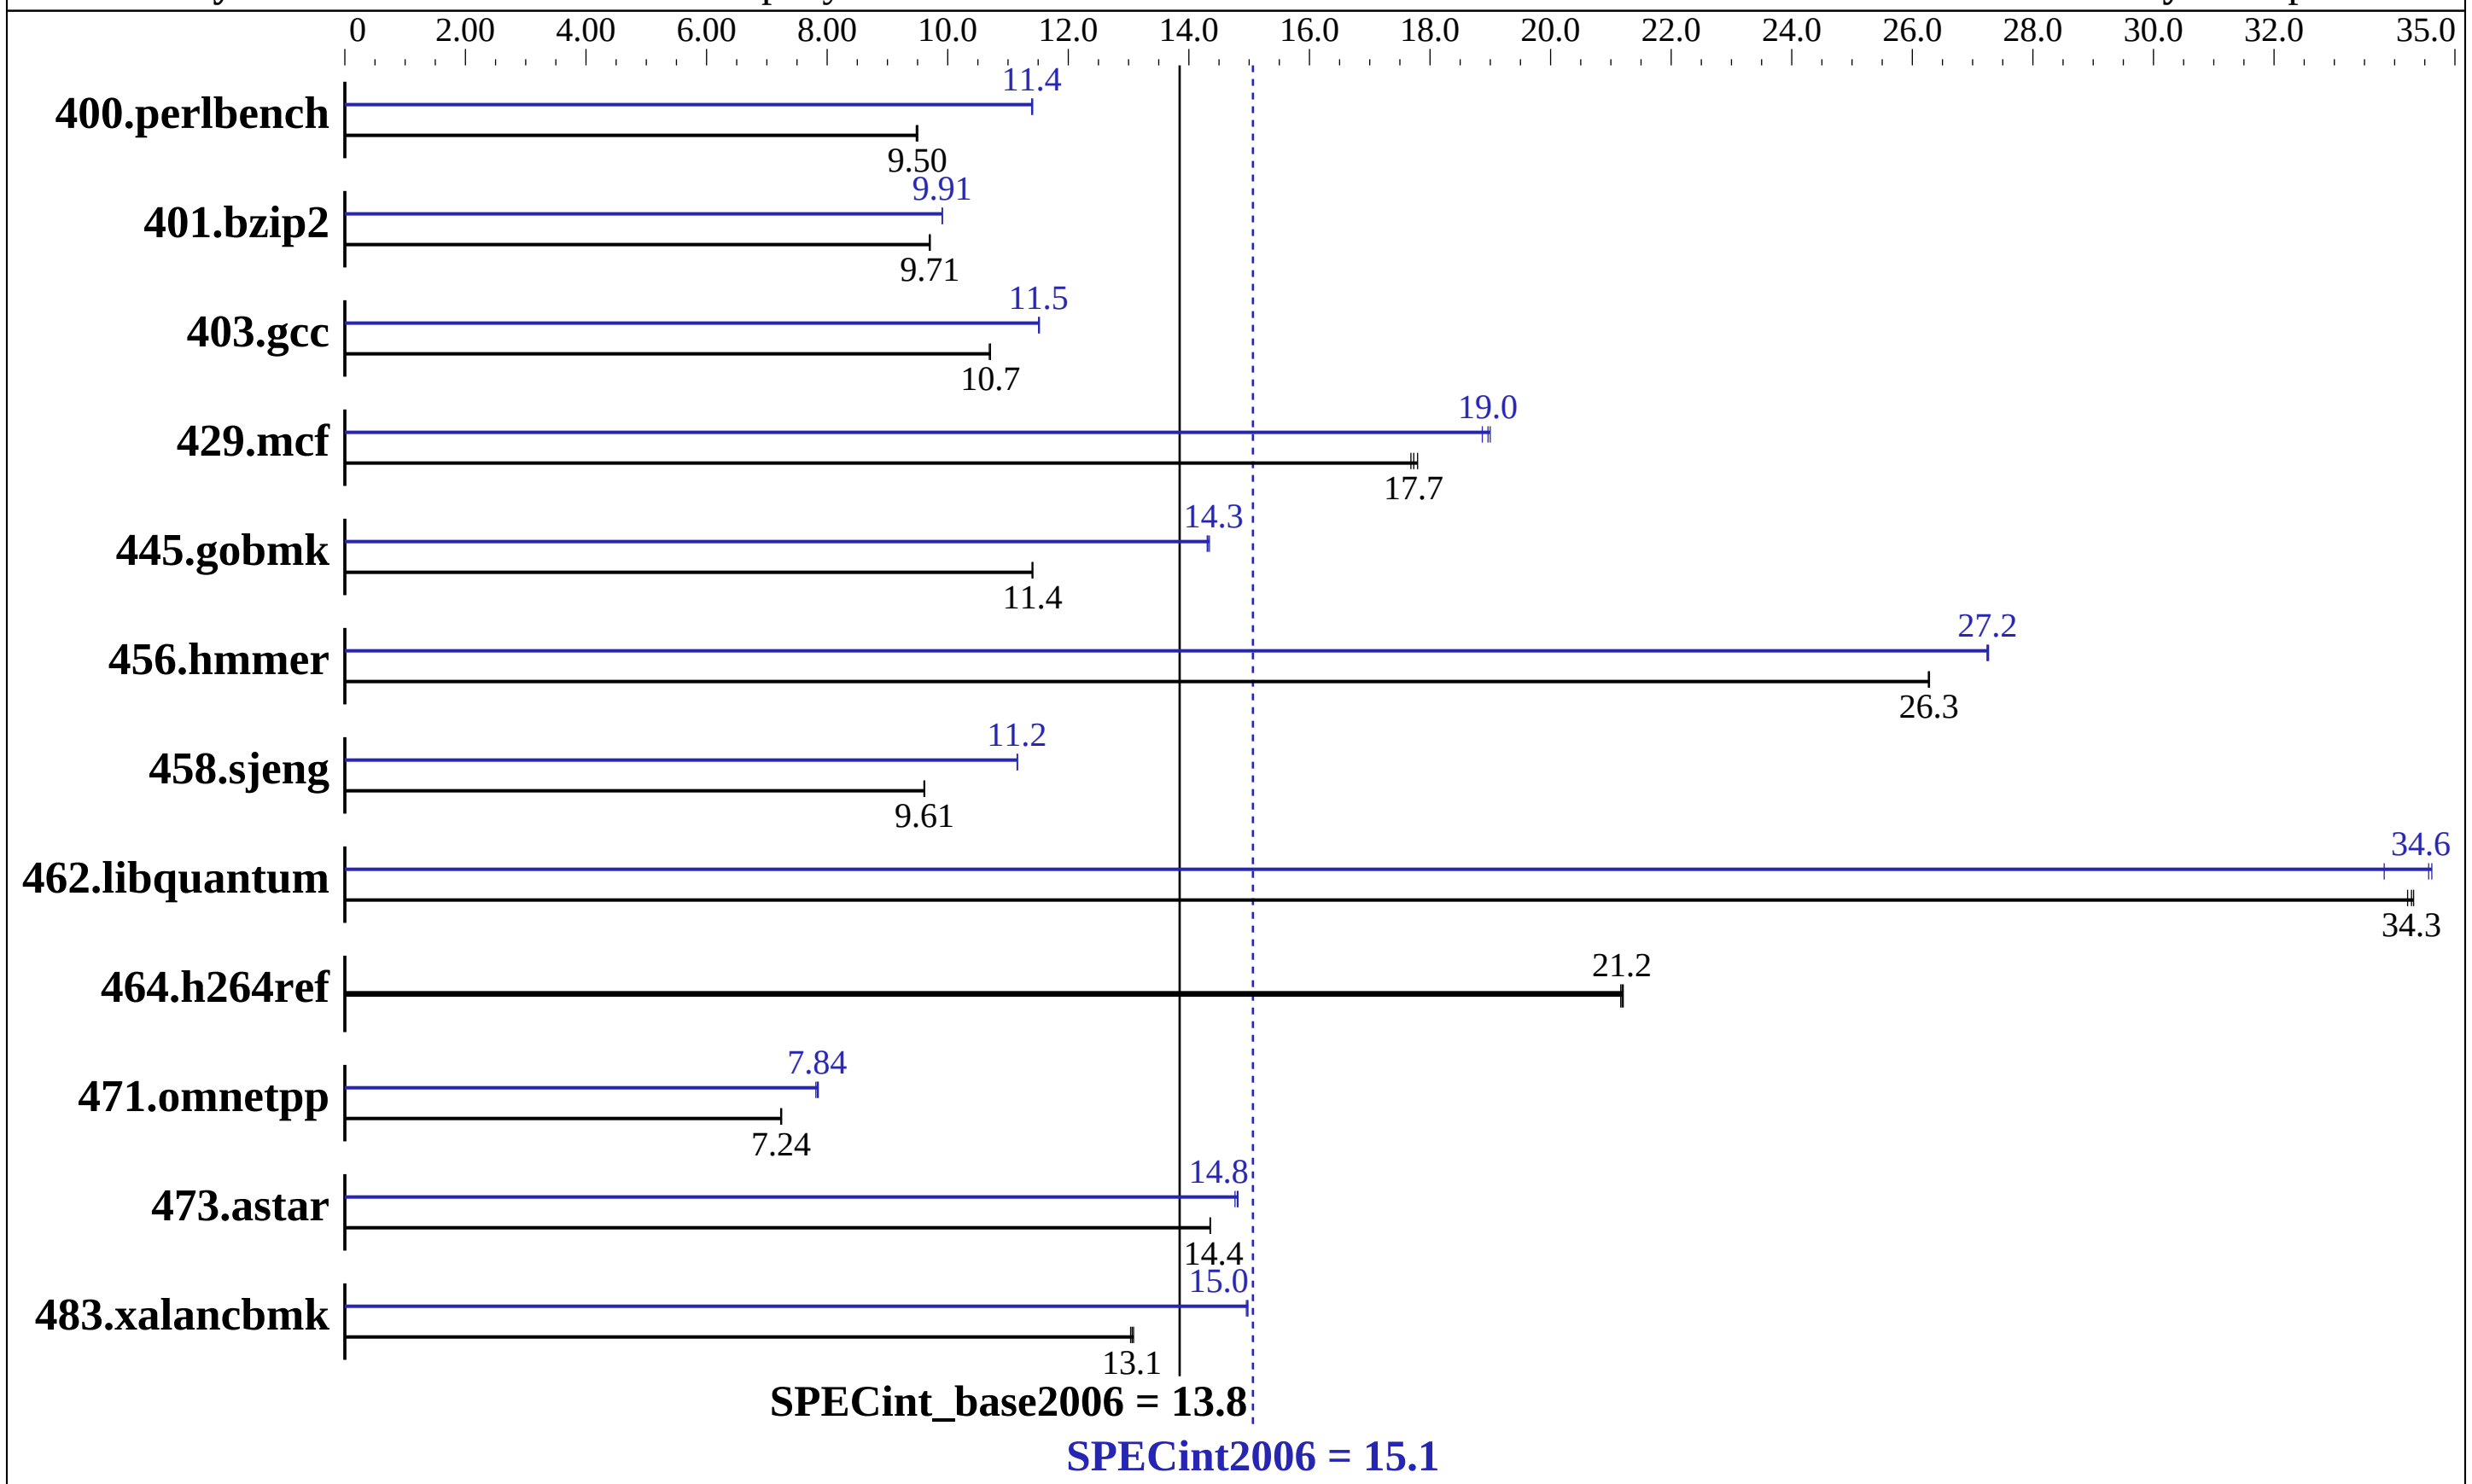

Hardware

CPU Name:	Dual-Core Intel Itanium 2 9050
CPU Characteristics:	1.6GHz/24MB, 400MHz FSB
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1-4 chips
Primary Cache:	16 KB I + 16 KB D on chip per core
Secondary Cache:	1 MB I + 256 KB D on chip per core
L3 Cache:	12 MB I+D on chip per core
Other Cache:	None
Memory:	32 GB (16x2GB DIMMs)
Disk Subsystem:	36GB 15K RPM SCSI
Other Hardware:	None

Software

Operating System:	HPUX11i-TCOE B.11.23.0609
Compiler:	HP C/aC++ Developer's Bundle C.11.23.12
Auto Parallel:	No
File System:	vxfs
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill Smartheap 8.0

SPEC CINT2006 Result

Hewlett-Packard Company

HP Integrity rx4640 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint2006 = 15.1

SPECint_base2006 = 13.8

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company
Test date: Sep-2006
Hardware Availability: Sep-2006
Software Availability: Sep-2006

Results Table

	Base						Peak					
Benchmark	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	1031	9.48	1028	9.50	**1029**	**9.50**	856	11.4	858	11.4	**857**	**11.4**
401.bzip2	995	9.70	**994**	**9.71**	994	9.71	974	9.91	**974**	**9.91**	974	9.91
403.gcc	753	10.7	**752**	**10.7**	752	10.7	699	11.5	700	11.5	**699**	**11.5**
429.mcf	513	17.8	516	17.7	**514**	**17.7**	483	18.9	**481**	**19.0**	480	19.0
445.gobmk	920	11.4	**920**	**11.4**	919	11.4	733	14.3	**733**	**14.3**	731	14.3
456.hmmer	355	26.3	**355**	**26.3**	355	26.3	343	27.2	342	27.3	**342**	**27.2**
458.sjeng	1258	9.62	1260	9.61	**1259**	**9.61**	1084	11.2	**1085**	**11.2**	1085	11.2
462.libquantum	604	34.3	606	34.2	**604**	**34.3**	613	33.8	599	34.6	**599**	**34.6**
464.h264ref	1046	21.2	**1045**	**21.2**	1044	21.2	1046	21.2	**1045**	**21.2**	1044	21.2
471.omnetpp	865	7.23	**864**	**7.24**	863	7.25	800	7.81	**798**	**7.84**	796	7.85
473.astar	489	14.4	489	14.4	**489**	**14.4**	475	14.8	474	14.8	**474**	**14.8**
483.xalancbmk	529	13.0	527	13.1	**528**	**13.1**	461	15.0	461	15.0	**461**	**15.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
The system had the September 2006 HP-UX 11i v2 Technical Computing
Operating Environment (TCOE) and compilers installed, along with
the following patches:

PHSS_34858  linker + fdp cumulative patch
PHSS_34853  Math Library Cumulative Patch
PHSS_34854  Integrity Unwind Library
PHSS_34855  HP C Compiler (A.06.12)
PHSS_34856  aC++ Compiler (A.06.12)
PHSS_34857  u2comp/be/plugin library patch
PHSS_34395  FORTRAN I/O Library [libIO77]
PHSS_34397  FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399  Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020  Perfmon enhancements and Itanium Dual-Core

The following kernel tunables were set, in addition to the defaults
set by the Technical Computing OE:

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

Platform Notes

```
The "cpuconfig" EFI command was used prior to booting
  to deconfigure processors.

Although two cores were enabled during testing,
  the SPEC CPU2006 benchmarks used only one core.
```

Base Compiler Invocation

C benchmarks:
`/opt/ansic/bin/cc -Ae`

C++ benchmarks:
`/opt/aCC/bin/aCC -Aa`

Base Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Base Optimization Flags

C benchmarks:
`+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N`

C++ benchmarks:
`+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a`

Peak Compiler Invocation

C benchmarks:
`/opt/ansic/bin/cc -Ae`

C++ benchmarks:
`/opt/aCC/bin/aCC -Aa`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

473.astar: +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:07:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2006.