SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor E5310,1.60GHz)

SPECfp®_rate2006 = 38.8

SPECfp_rate_base2006 = 38.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

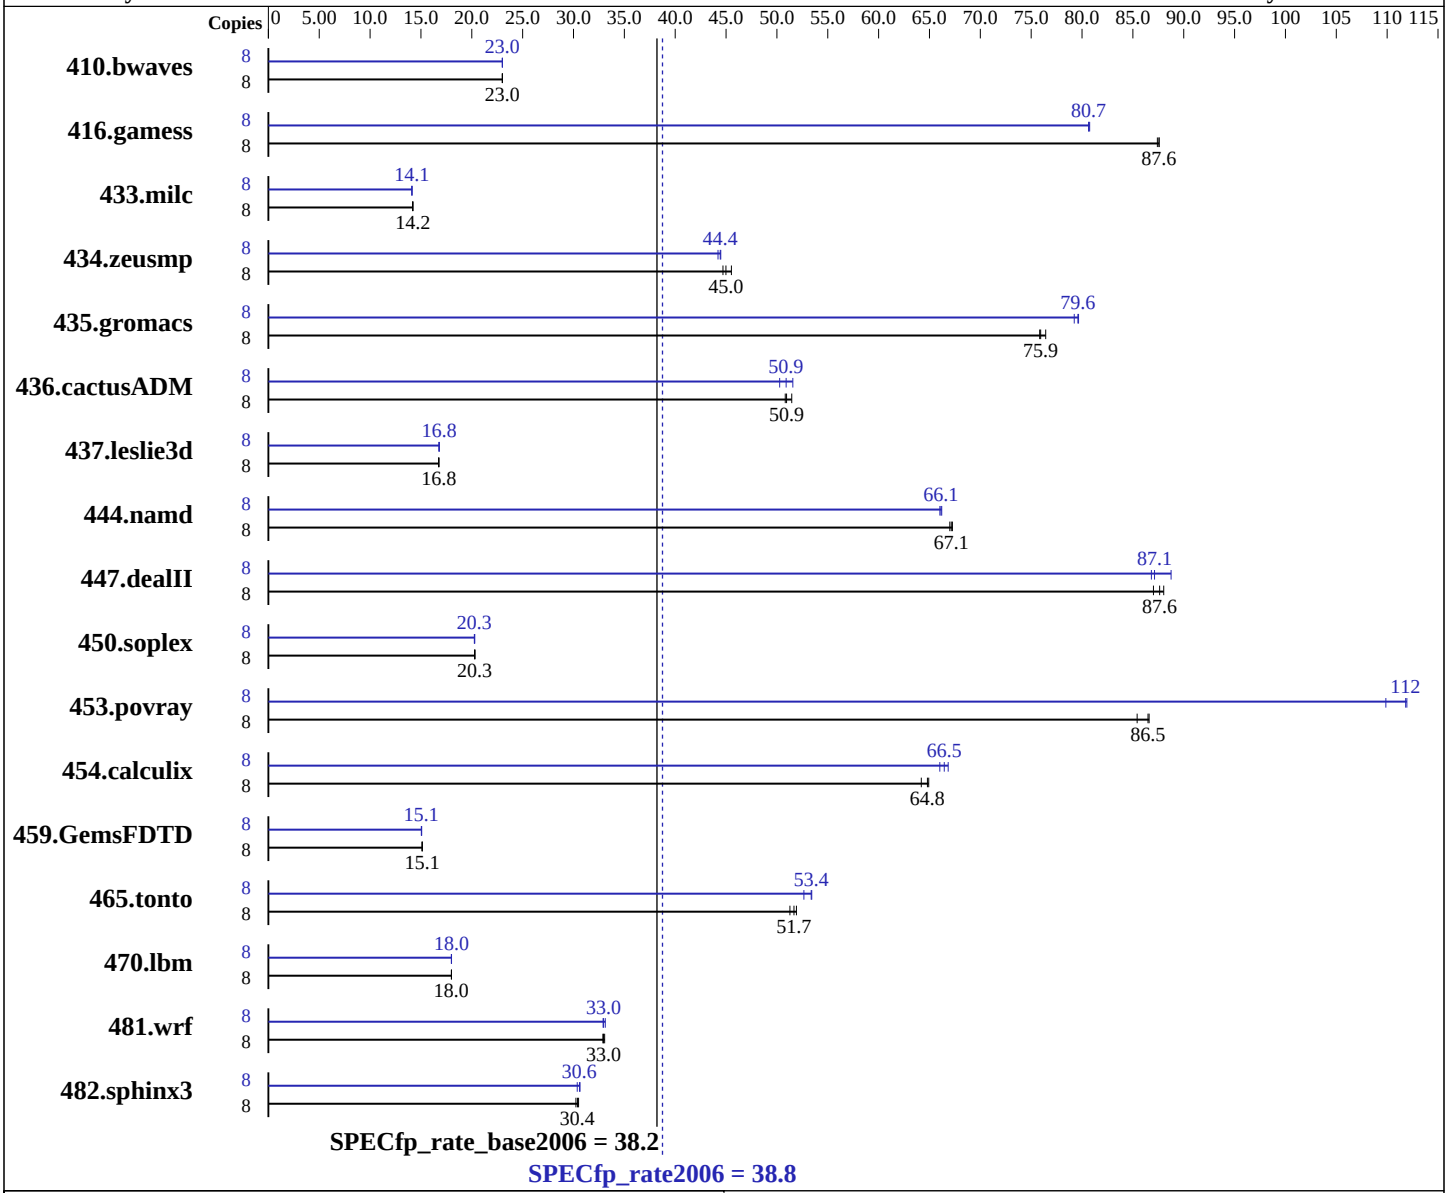

Hardware

CPU Name:	Intel Xeon E5310
CPU Characteristics:	1.6 GHz, 8 MB L2, 1066 MHz system bus
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1 to 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (EM64T) kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler for Intel EM64T-based applications, Version 9.1 Package ID l_cc_c_9.1.045 Build no 20061101 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1 Package ID l_fc_c_9.1.040 Build no 20061101
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor E5310,1.60GHz)

SPECfp_rate2006 = 38.8

SPECfp_rate_base2006 = 38.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

L3 Cache: None
Other Cache: None
Memory: 12 GB (1GB DIMMx12, FB-DIMM PC2-5300F ECC CL5)
Disk Subsystem: 73 GB SAS, 10000RPM
Other Hardware: None

File System: ext2
System State: Multi-user run level 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	4729	23.0	4723	23.0	**4724**	**23.0**	8	**4726**	**23.0**	4726	23.0	4725	23.0
416.gamess	8	**1789**	**87.6**	1792	87.4	1789	87.6	8	**1942**	**80.7**	1940	80.8	1942	80.6
433.milc	8	5167	14.2	5182	14.2	**5169**	**14.2**	8	**5203**	**14.1**	5204	14.1	5202	14.1
434.zeusmp	8	1629	44.7	**1618**	**45.0**	1599	45.5	8	1637	44.5	**1639**	**44.4**	1647	44.2
435.gromacs	8	753	75.8	**752**	**75.9**	747	76.4	8	**718**	**79.6**	717	79.7	721	79.2
436.cactusADM	8	1858	51.5	**1876**	**50.9**	1881	50.8	8	1854	51.6	**1878**	**50.9**	1902	50.3
437.leslie3d	8	**4486**	**16.8**	4494	16.7	4484	16.8	8	4484	16.8	**4478**	**16.8**	4476	16.8
444.namd	8	954	67.3	958	67.0	**956**	**67.1**	8	**970**	**66.1**	972	66.0	969	66.2
447.dealII	8	1040	88.0	1052	87.0	**1044**	**87.6**	8	**1050**	**87.1**	1054	86.8	1031	88.8
450.soplex	8	3290	20.3	**3288**	**20.3**	3284	20.3	8	**3294**	**20.3**	3294	20.3	3288	20.3
453.povray	8	498	85.4	**492**	**86.5**	491	86.6	8	387	110	380	112	**381**	**112**
454.calculix	8	1017	64.9	**1019**	**64.8**	1028	64.2	8	1000	66.0	987	66.8	**993**	**66.5**
459.GemsFDTD	8	5618	15.1	**5610**	**15.1**	5609	15.1	8	5644	15.0	**5638**	**15.1**	5630	15.1
465.tonto	8	1535	51.3	**1523**	**51.7**	1516	51.9	8	1495	52.7	**1475**	**53.4**	1473	53.4
470.lbm	8	6105	18.0	6108	18.0	**6107**	**18.0**	8	**6105**	**18.0**	6111	18.0	6104	18.0
481.wrf	8	**2712**	**33.0**	2717	32.9	2703	33.1	8	**2711**	**33.0**	2698	33.1	2715	32.9
482.sphinx3	8	5156	30.2	5112	30.5	**5131**	**30.4**	8	5134	30.4	5088	30.6	**5097**	**30.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Environment stack size set to 'unlimited'
```

General Notes

```
The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R460 model.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

C++ benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

Fortran benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast

Benchmarks using both Fortran and C:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor E5310,1.60GHz)

SPECfp_rate2006 = 38.8

SPECfp_rate_base2006 = 38.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:06:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2007.