SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 (AMD Opteron 8222 SE)

SPECfp®_rate2006 = 96.8

SPECfp_rate_base2006 = 91.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Apr-2007
Software Availability: Mar-2007

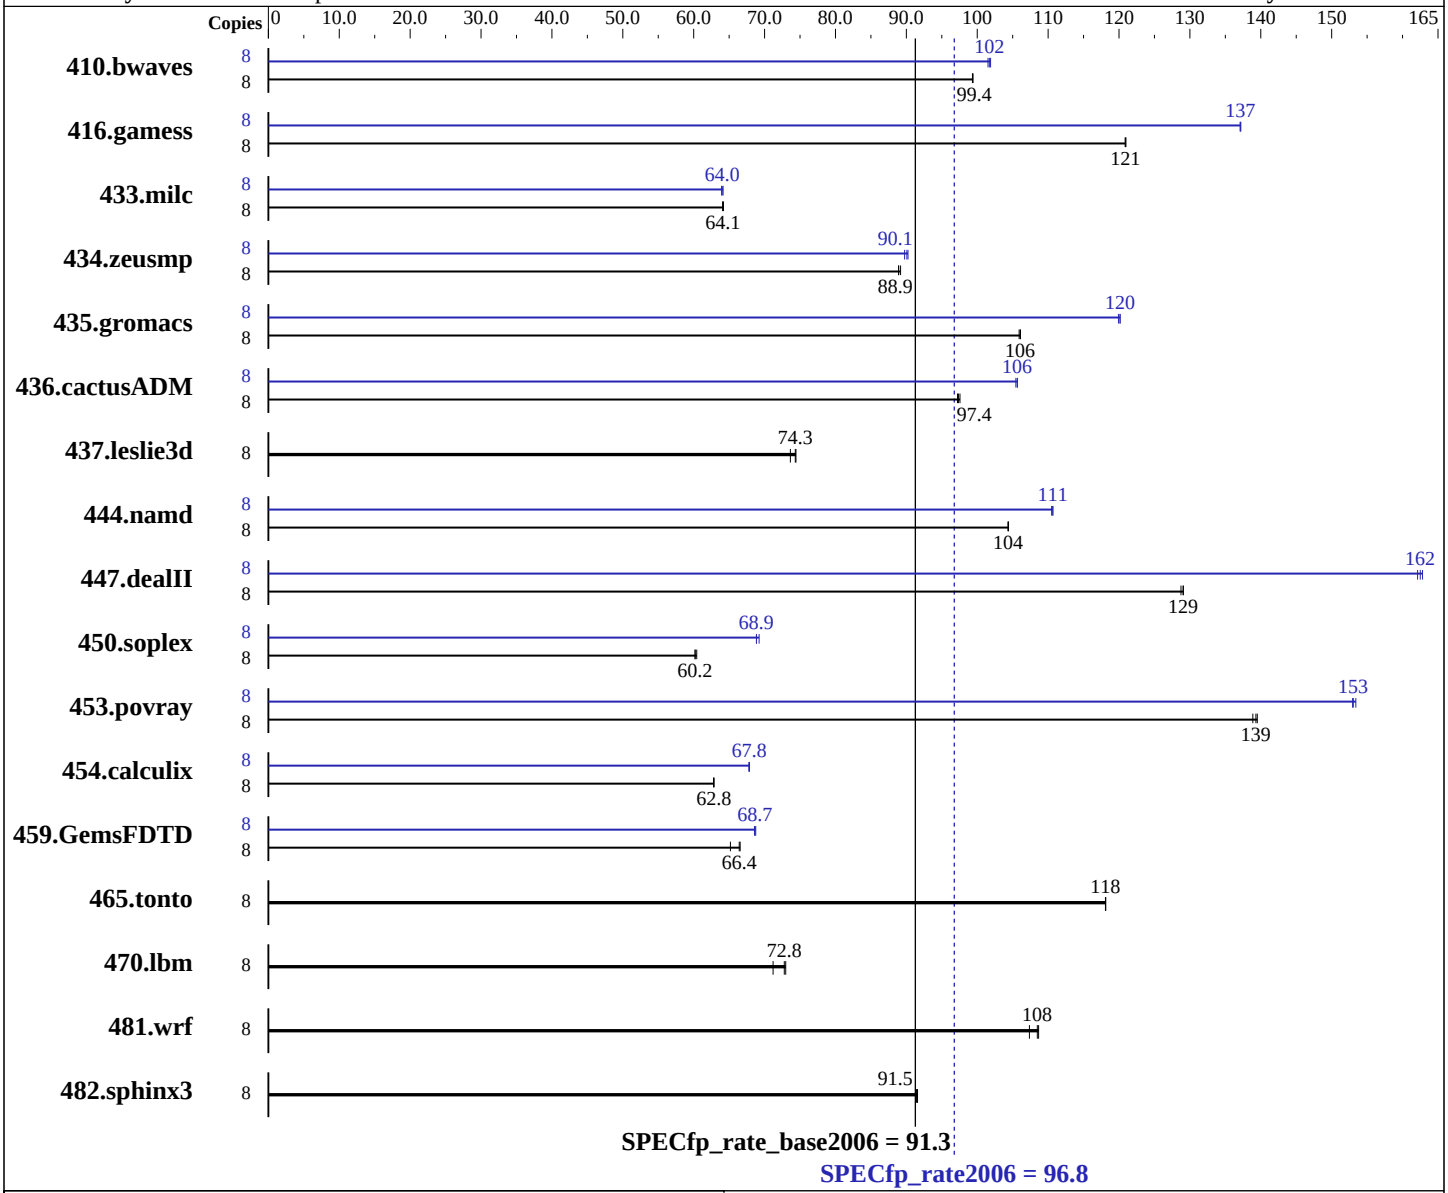

Hardware

CPU Name:	AMD Opteron 8222 SE
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	1, 2, 3, 4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 (AMD Opteron 8222 SE)

SPECfp_rate2006 = 96.8

SPECfp_rate_base2006 = 91.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Apr-2007
Software Availability: Mar-2007

L3 Cache: None
Other Cache: None
Memory: 32 GB (16 x 2GB DDR2-5300 ECC)
Disk Subsystem: 1 x 36 GB SAS, 15000 RPM
Other Hardware: None

Other Software: MicroQuill SmartHeap 8.1

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1095	99.3	1094	99.4	**1094**	**99.4**	8	1067	102	1071	102	**1069**	**102**
416.gamess	8	**1295**	**121**	1296	121	1295	121	8	1142	137	1143	137	**1142**	**137**
433.milc	8	**1145**	**64.1**	1146	64.1	1144	64.2	8	**1147**	**64.0**	1149	63.9	1145	64.1
434.zeusmp	8	**819**	**88.9**	819	88.9	816	89.2	8	811	89.8	807	90.2	**808**	**90.1**
435.gromacs	8	539	106	**539**	**106**	538	106	8	475	120	**475**	**120**	476	120
436.cactusADM	8	983	97.2	980	97.6	**982**	**97.4**	8	**905**	**106**	905	106	907	105
437.leslie3d	8	**1012**	**74.3**	1010	74.4	1021	73.6	8	**1012**	**74.3**	1010	74.4	1021	73.6
444.namd	8	614	104	**615**	**104**	615	104	8	581	110	580	111	**580**	**111**
447.dealII	8	711	129	709	129	**709**	**129**	8	565	162	562	163	**563**	**162**
450.soplex	8	1108	60.2	1104	60.4	**1108**	**60.2**	8	**969**	**68.9**	969	68.9	964	69.2
453.povray	8	305	140	306	139	**306**	**139**	8	278	153	277	153	**278**	**153**
454.calculix	8	**1050**	**62.8**	1050	62.9	1051	62.8	8	**973**	**67.8**	972	67.9	974	67.8
459.GemsFDTD	8	1302	65.2	1275	66.6	**1278**	**66.4**	8	1235	68.8	**1236**	**68.7**	1238	68.6
465.tonto	8	667	118	**667**	**118**	666	118	8	667	118	**667**	**118**	666	118
470.lbm	8	1544	71.2	1506	73.0	**1510**	**72.8**	8	1544	71.2	1506	73.0	**1510**	**72.8**
481.wrf	8	**824**	**108**	832	107	822	109	8	**824**	**108**	832	107	822	109
482.sphinx3	8	1703	91.6	**1703**	**91.5**	1705	91.4	8	1703	91.6	**1703**	**91.5**	1705	91.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
 taskset utility used to bind CPU(s) to processes
DSPEC_CPU_TABLE_WORKAROUND was used for portability when compiling 447.dealII
due to compilation being performed on SLES 9 SP3
```

Base Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast

C++ benchmarks:
-Ofast

Fortran benchmarks:
-Ofast -OPT:malloc_alg=1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1

Base Other Flags

C benchmarks:
-IPA:max_jobs=2

Continued on next page

Base Other Flags (Continued)

C++ benchmarks:
`-IPA:max_jobs=2`

Fortran benchmarks:
`-IPA:max_jobs=2`

Benchmarks using both Fortran and C:
`-IPA:max_jobs=2`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Fortran benchmarks:
`pathf95`

Benchmarks using both Fortran and C:
`pathcc pathf95`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_TABLE_WORKAROUND`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

433.milc: `-Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc_alg=1`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -fno-exceptions`

447.dealII: `-Ofast -INLINE:aggressive=on -LNO:opt=0 -OPT:alias=disjoint -m32 -fno-exceptions`

450.soplex: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1 -LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions`

453.povray: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -fno-fast-math`

Fortran benchmarks:

410.bwaves: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off -LNO:ignore_feedback=off`

416.gamess: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O2 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256`

434.zeusmp: `-Ofast -CG:local_fwd_sched=on -LNO:blocking=off -LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-Ofast -LNO:fission=2 -LNO:prefetch=0`

465.tonto: `basepeak = yes`

Benchmarks using both Fortran and C:

435.gromacs: `-O3 -OPT:rsqrt=2 -OPT:ro=3`

436.cactusADM: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -LNO:prefetch=3 -LNO:prefetch_ahead=5 -LNO:ou_prod_max=10 -LNO:full_unroll=5 -ipa`

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-Ofast -LNO:simd=0 -WOPT:mem_opnds=on`

481.wrf: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

Fortran benchmarks:
`-IPA:max_jobs=2`

Benchmarks using both Fortran and C:
`-IPA:max_jobs=2`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:22:49 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2007.