SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

Fujitsu SPARC Enterprise M8000

SPECfp®2006 = 28.8

SPECfp_base2006 = 25.0

CPU2006 license: 19
Test sponsor: Fujitsu Limited
Tested by: Sun Microsystems

Test date: Jun-2008
Hardware Availability: Jul-2008
Software Availability: Jul-2008

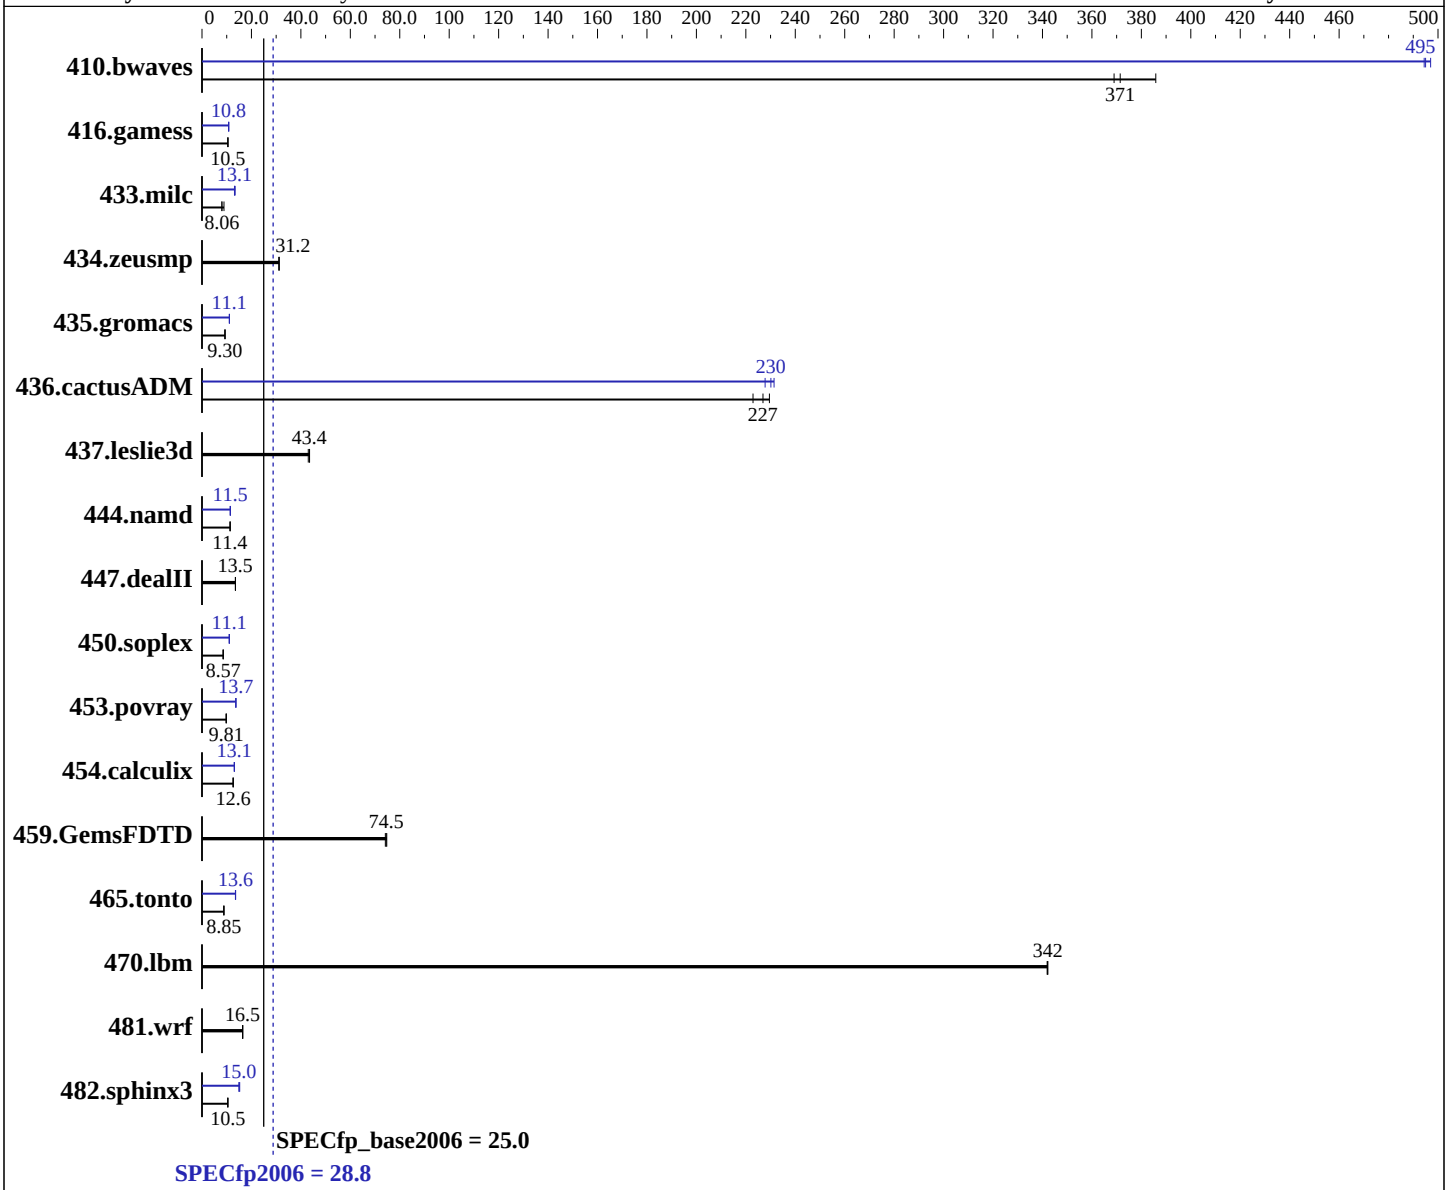

Hardware

CPU Name:	SPARC64 VII
CPU Characteristics:	
CPU MHz:	2520
FPU:	Integrated
CPU(s) enabled:	64 cores, 16 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 to 4 CMUs; each CMU contains 2 or 4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Solaris 10 5/08 with Patch 137111-03
Compiler:	Sun Studio 12 with patches 124867-06, 124861-07, 124863-05, 127000-05 (see patch information below)
Auto Parallel:	Yes
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

Fujitsu SPARC Enterprise M8000

SPECfp2006 = 28.8

SPECfp_base2006 = 25.0

CPU2006 license: 19
Test sponsor: Fujitsu Limited
Tested by: Sun Microsystems

Test date: Jun-2008
Hardware Availability: Jul-2008
Software Availability: Jul-2008

L3 Cache: None
Other Cache: None
Memory: 256 GB (128 x 2 GB)
Disk Subsystem: Fujitsu 73 GB 10000 RPM SAS
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	35.2	386	36.8	369	**36.6**	**371**	27.5	494	**27.5**	**495**	27.3	497
416.gamess	1868	10.5	**1869**	**10.5**	1869	10.5	**1814**	**10.8**	1816	10.8	1811	10.8
433.milc	1032	8.89	1141	8.05	**1139**	**8.06**	699	13.1	684	13.4	**698**	**13.1**
434.zeusmp	292	31.2	292	31.1	**292**	**31.2**	292	31.2	292	31.1	**292**	**31.2**
435.gromacs	**768**	**9.30**	767	9.30	768	9.30	**644**	**11.1**	644	11.1	644	11.1
436.cactusADM	53.6	223	52.1	230	**52.7**	**227**	52.5	228	**51.9**	**230**	51.6	231
437.leslie3d	216	43.5	219	43.0	**216**	**43.4**	216	43.5	219	43.0	**216**	**43.4**
444.namd	704	11.4	**704**	**11.4**	706	11.4	**699**	**11.5**	699	11.5	701	11.4
447.dealII	846	13.5	**846**	**13.5**	845	13.5	846	13.5	**846**	**13.5**	845	13.5
450.soplex	973	8.57	**973**	**8.57**	972	8.58	756	11.0	754	11.1	**755**	**11.1**
453.povray	543	9.79	542	9.82	**542**	**9.81**	389	13.7	**388**	**13.7**	388	13.7
454.calculix	**654**	**12.6**	654	12.6	654	12.6	**630**	**13.1**	631	13.1	630	13.1
459.GemsFDTD	143	74.2	142	74.7	**142**	**74.5**	143	74.2	142	74.7	**142**	**74.5**
465.tonto	1111	8.85	**1112**	**8.85**	1112	8.85	**725**	**13.6**	724	13.6	728	13.5
470.lbm	40.2	342	40.2	342	**40.2**	**342**	40.2	342	40.2	342	**40.2**	**342**
481.wrf	679	16.5	**679**	**16.5**	679	16.5	679	16.5	**679**	**16.5**	679	16.5
482.sphinx3	**1862**	**10.5**	1862	10.5	1871	10.4	**1299**	**15.0**	1278	15.3	1301	15.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
Sun Studio compiler patches are available at
    http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp
```

Operating System Notes

```
Environment Variable Settings:

The maximum number of threads a program can create was set with:
    OMP_NUM_THREADS=64

Program threads were bound to processors with:
```

Continued on next page

Operating System Notes (Continued)

```
    SUNW_MP_PROCBIND="  1  2  4  6  8 10 12 14 16 18 20 22 24 26 28 30 32 34
                       36 38 40 42 44 46 48 50 52 54 56 58 60 62 64 66 68 70
                       72 74 76 78 80 82 84 86 88 90 92 94 96 98 100 102 104
                       104 106 108 110 112 114 116 118 120 122 124 126 "

Behavior of parallel threads was set with:
    SUNW_MP_THR_IDLE=SPIN
SPIN specifies that an idle thread should spin while waiting at barrier
or waiting for new parallel regions to work on.


System Tunables (/etc/system parameters):

tune_t_fsflushr=10
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
autoup=300
    Causes pages older than the listed number of seconds to
    be written by fsflush.
bufhwm=3000
    Memory byte limit for caching I/O buffers
segmap_percent=3
    Set maximum percent memory for file system cache
lpg_alloc_prefer=1
    Set lgroup page allocation to strongly prefer local pages

Other System Settings:

The webconsole service was turned off using
    svcadm disable webconsole
```

Platform Notes

```
Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M8000 Server.
Note that the Sun SPARC Enterprise M8000 and Fujitsu SPARC Enterprise
M8000 are electrically equivalent.
```

Base Compiler Invocation

C benchmarks:
    cc

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:
-fast -xipo=2 -fma=fused -xpagesize=4M -xprefetch=latx:2 -xautopar
-xreduction -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access

C++ benchmarks:
-library=stlport4 -fast -xipo=2 -fma=fused -xpagesize=4M
-xprefetch=latx:2 -xautopar -xreduction -xprefetch_level=2
-xalias_level=compatible

Fortran benchmarks:
-fast -xipo=2 -fma=fused -xpagesize=4M -xprefetch=latx:2 -xautopar
-xreduction -xprefetch_level=2

Benchmarks using both Fortran and C:
-fast(cc) -fast(f90) -xipo=2 -fma=fused -xpagesize=4M
-xprefetch=latx:2 -xautopar -xreduction -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access -xprefetch_level=2

Base Other Flags

C benchmarks:
-xjobs=64

C++ benchmarks:
-xjobs=64

Fortran benchmarks:
-xjobs=64

Benchmarks using both Fortran and C:
-xjobs=64

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

433.milc: -fast -xipo=2 -fma=fused -xpagesize=4M -xprefetch=latx:2
-xalias_level=std -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access
-xalias_level=strong -xprefetch_level=2

470.lbm: basepeak = yes

482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -fma=fused
-xalias_level=std -xautopar -xreduction

C++ benchmarks:

444.namd: -library=stlport4 -fast -xipo=2 -fma=fused -xpagesize=4M
-xprefetch=latx:2 -xalias_level=compatible -xdepend

447.dealII: basepeak = yes

450.soplex: -library=stlport4 -fast -xipo=2 -fma=fused -xpagesize=4M
-xprefetch=latx:2 -xdepend -xprefetch_level=2
-xprefetch_auto_type=indirect_array_access
-Qoption cg -Qlp-ol=1 -Qoption cg -Qlp-it=3
-Qoption cg -Qlp-imb=1 -Qoption iropt -Apf:pdl=3

453.povray: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -fma=fused
-xpagesize=4M -xprefetch=latx:2 -xalias_level=compatible
-xdepend -xrestrict -xprefetch=latx:4.5

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: `-fast -xipo=2 -fma=fused -xpagesize=512K -xprefetch=latx:2 -xprefetch_level=2 -xautopar -xreduction`

416.gamess: `-fast -xipo=2 -fma=fused -xpagesize=4M -xprefetch=latx:2 -xprefetch_level=2`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -xipo=2 -fma=fused -xpagesize=4M -xprefetch=latx:2 -xarch=v8plusa -xprefetch=latx:12 -lfast`

Benchmarks using both Fortran and C:

435.gromacs: `-xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast`(cc) `-fast`(f90) `-xipo=2 -fma=fused -xalias_level=std`

436.cactusADM: `-fast`(cc) `-fast`(f90) `-xipo=2 -fma=fused -xpagesize=4M -xprefetch=latx:2 -xalias_level=std -xprefetch_level=3 -xprefetch_auto_type=indirect_array_access -xautopar -xreduction`

454.calculix: `-fast`(cc) `-fast`(f90) `-xipo=2 -fma=fused -xalias_level=std`

481.wrf: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-xjobs=64`

C++ benchmarks:
`-xjobs=64`

Fortran benchmarks:
`-xjobs=64`

Benchmarks using both Fortran and C:
`-xjobs=64`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 18:52:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2008.