



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®2006 = 23.1

PRIMERGY TX200 S5, Intel Xeon E5502, 1.87 GHz

SPECfp_base2006 = 21.6

CPU2006 license: 19


Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

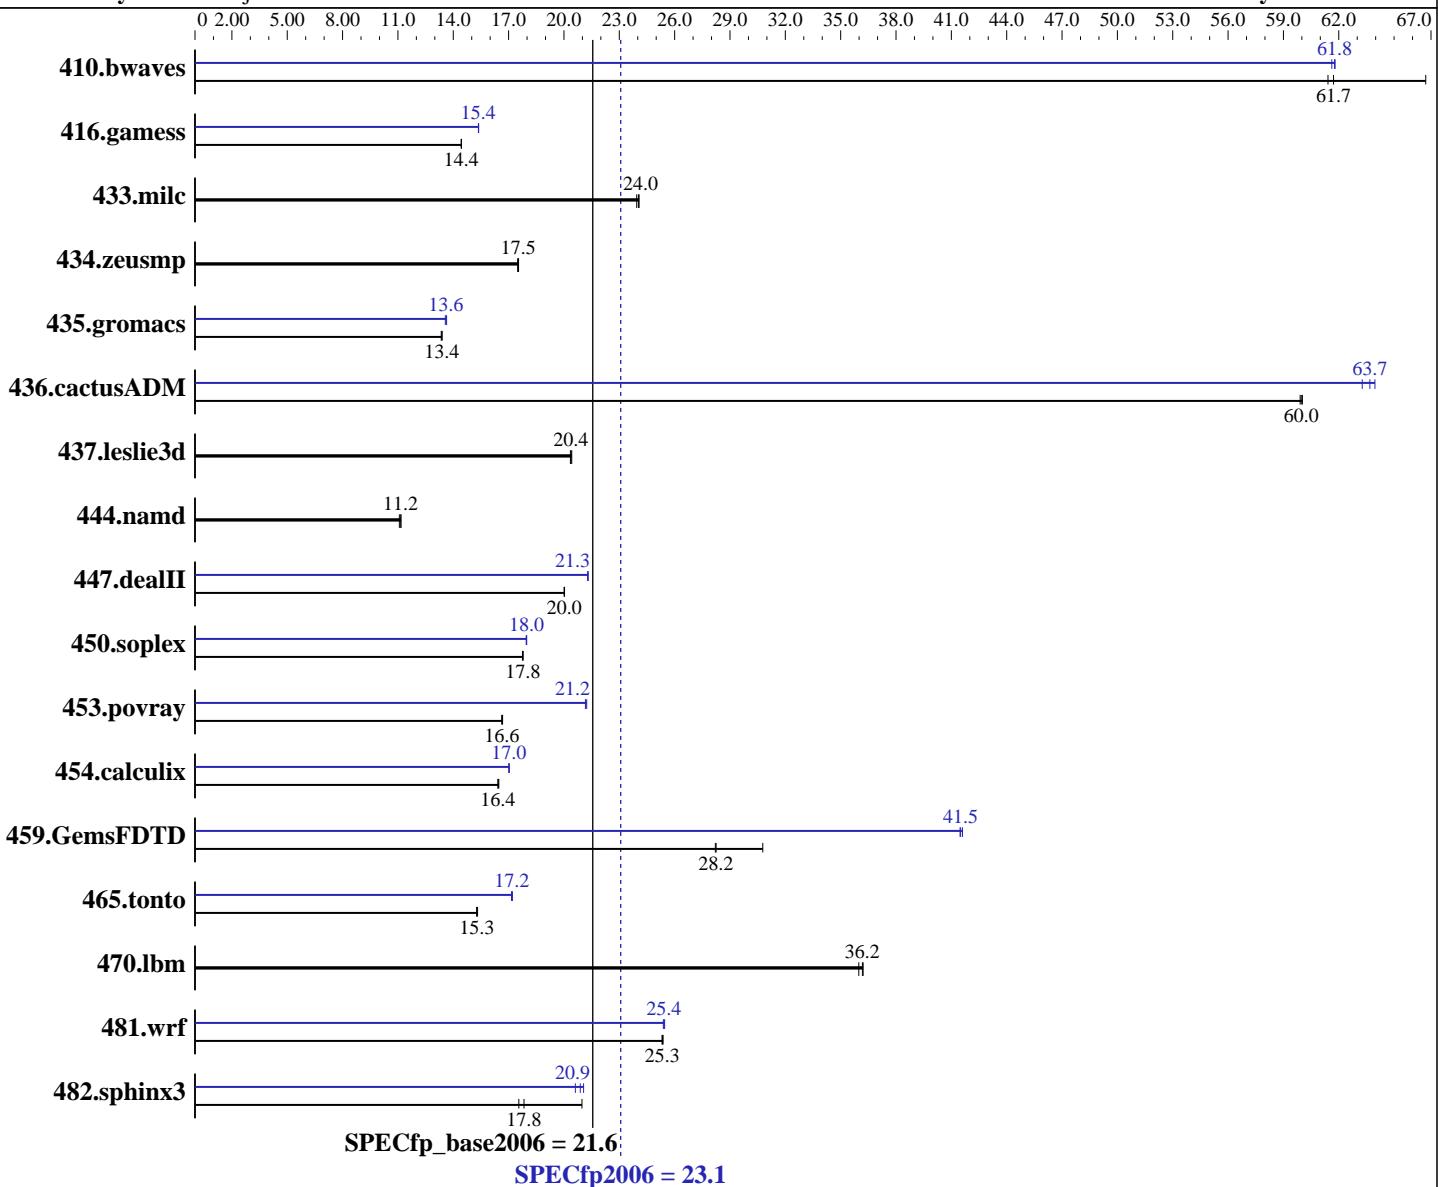

Hardware

CPU Name: Intel Xeon E5502
CPU Characteristics:
CPU MHz: 1867
FPU: Integrated
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel: Yes
File System: ext3
System State: Multi-User Run Level 3
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon E5502, 1.87 GHz

SPECfp2006 = 23.1

CPU2006 license: 19

Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

L3 Cache:	4 MB I+D on chip per chip	Peak Pointers:	32/64-bit
Other Cache:	None	Other Software:	Binutils 2.18.50.0.7.20080502
Memory:	48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)		
Disk Subsystem:	1 x SATA, 250 GB, 7200 RPM		
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	221	61.4	204	66.7	<u>220</u>	<u>61.7</u>	<u>220</u>	<u>61.8</u>	220	61.8	221	61.6
416.gamess	1356	14.4	1356	14.4	<u>1356</u>	<u>14.4</u>	<u>1274</u>	<u>15.4</u>	1273	15.4	1274	15.4
433.milc	383	23.9	381	24.1	<u>382</u>	<u>24.0</u>	383	23.9	381	24.1	<u>382</u>	<u>24.0</u>
434.zeusmp	519	17.5	520	17.5	<u>519</u>	<u>17.5</u>	<u>519</u>	<u>17.5</u>	520	17.5	<u>519</u>	<u>17.5</u>
435.gromacs	533	13.4	<u>533</u>	<u>13.4</u>	535	13.3	526	13.6	<u>525</u>	<u>13.6</u>	524	13.6
436.cactusADM	<u>199</u>	<u>60.0</u>	199	59.9	199	60.0	<u>187</u>	<u>64.0</u>	<u>188</u>	<u>63.7</u>	189	63.3
437.leslie3d	460	20.4	<u>461</u>	<u>20.4</u>	462	20.3	460	20.4	<u>461</u>	<u>20.4</u>	462	20.3
444.namd	718	11.2	<u>719</u>	<u>11.2</u>	724	11.1	<u>718</u>	<u>11.2</u>	<u>719</u>	<u>11.2</u>	724	11.1
447.dealII	<u>572</u>	<u>20.0</u>	572	20.0	571	20.0	<u>537</u>	21.3	537	21.3	<u>537</u>	<u>21.3</u>
450.soplex	470	17.8	<u>469</u>	<u>17.8</u>	469	17.8	<u>464</u>	<u>18.0</u>	465	18.0	464	18.0
453.povray	319	16.7	<u>320</u>	<u>16.6</u>	320	16.6	<u>251</u>	<u>21.2</u>	251	21.2	251	21.2
454.calculix	502	16.4	501	16.5	<u>502</u>	<u>16.4</u>	<u>485</u>	<u>17.0</u>	484	17.0	485	17.0
459.GemsFDTD	376	28.2	345	30.8	<u>376</u>	<u>28.2</u>	256	41.5	<u>256</u>	<u>41.5</u>	255	41.6
465.tonto	644	15.3	642	15.3	<u>644</u>	<u>15.3</u>	<u>572</u>	17.2	<u>572</u>	<u>17.2</u>	574	17.2
470.lbm	382	36.0	379	36.2	<u>380</u>	<u>36.2</u>	382	36.0	379	36.2	<u>380</u>	<u>36.2</u>
481.wrf	<u>441</u>	<u>25.3</u>	441	25.3	440	25.4	439	25.5	440	25.4	<u>439</u>	<u>25.4</u>
482.sphinx3	1110	17.6	929	21.0	<u>1093</u>	<u>17.8</u>	925	21.1	945	20.6	<u>933</u>	<u>20.9</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 800 MHz.

General Notes

OMP_NUM_THREADS set to number of cores

KMP_AFFINITY set to granularity=fine,scatter

KMP_STACKSIZE set to 200M

For information about Fujitsu please visit: <http://www.fujitsu.com>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon E5502, 1.87 GHz

SPECfp2006 = 23.1

CPU2006 license: 19

Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon E5502, 1.87 GHz

SPECfp2006 = 23.1

CPU2006 license: 19

Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon E5502, 1.87 GHz

SPECfp2006 =

23.1

SPECfp_base2006 =

21.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date:

Aug-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

444.namd: basepeak = yes

447.dealII: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsSE4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsSE4 .2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xsSE4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon E5502, 1.87 GHz

SPECfp2006 = 23.1

SPECfp_base2006 = 21.6

CPU2006 license: 19

Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20091013.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20091013.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:33:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 October 2009.