SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 750 Express (3.3 GHz, 32 core, SLES)

SPECfp®_rate2006 = 839

SPECfp_rate_base2006 = 736

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2010
Hardware Availability: Feb-2010
Software Availability: Dec-2009

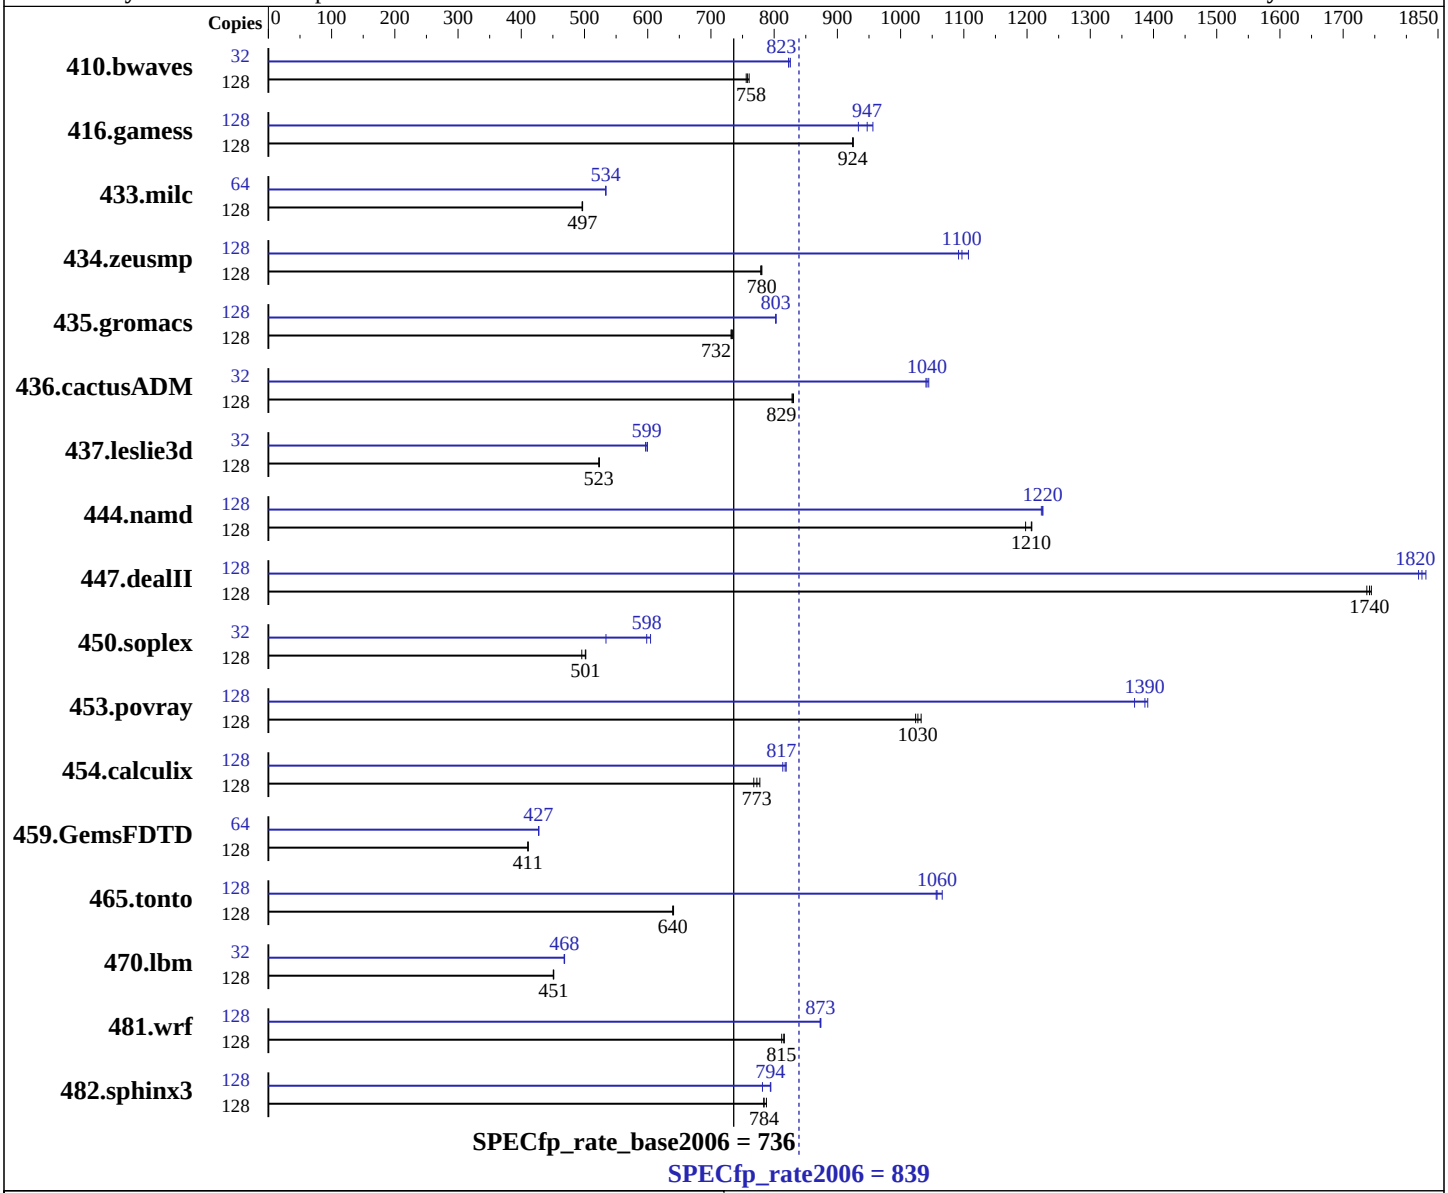

Hardware

CPU Name:	POWER7
CPU Characteristics:	Intelligent Energy Optimization enabled, up to 3.64 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable:	6,8,12,16,18,24,32 cores
Primary Cache:	32 KB I + 32 KB D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (ppc64), Kernel 2.6.27.19-5-ppc64
Compiler:	IBM XL C/C++ for Linux, V10.1 Updated with the Oct2009 PTF IBM XL Fortran for Linux, V12.1 Updated with the Oct2009 PTF
Auto Parallel:	No
File System:	ext3

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 750 Express (3.3 GHz, 32 core, SLES)

SPECfp_rate2006 = 839

SPECfp_rate_base2006 = 736

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2010
Hardware Availability: Feb-2010
Software Availability: Dec-2009

Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 4 MB I+D on chip per core
Other Cache: None
Memory: 256 GB (32x8 GB) DDR3 1066 MHz
Disk Subsystem: 8x146.8 GB SAS SFF 15K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-1
-MicroQuill SmartHeap 9

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	**2296**	**758**	2302	756	2288	760	32	**528**	**823**	527	826	529	823
416.gamess	128	2709	925	**2711**	**924**	2712	924	128	2621	956	2686	933	**2646**	**947**
433.milc	128	2364	497	**2366**	**497**	2367	496	64	1101	534	1101	534	**1101**	**534**
434.zeusmp	128	1496	779	**1493**	**780**	1493	780	128	1052	1110	1067	1090	**1062**	**1100**
435.gromacs	128	**1248**	**732**	1249	732	1245	734	128	1139	802	**1138**	**803**	1138	803
436.cactusADM	128	1842	831	**1844**	**829**	1847	828	32	368	1040	**367**	**1040**	366	1040
437.leslie3d	128	2301	523	**2301**	**523**	2298	524	32	504	597	**502**	**599**	502	600
444.namd	128	857	1200	**851**	**1210**	850	1210	128	838	1220	840	1220	**838**	**1220**
447.dealII	128	843	1740	**841**	**1740**	839	1740	128	800	1830	805	1820	**803**	**1820**
450.soplex	128	2153	496	**2129**	**501**	2126	502	32	500	534	**446**	**598**	441	604
453.povray	128	665	1020	**663**	**1030**	660	1030	128	497	1370	490	1390	**491**	**1390**
454.calculix	128	1375	768	**1367**	**773**	1358	777	128	1298	814	1289	819	**1292**	**817**
459.GemsFDTD	128	3309	410	3305	411	**3308**	**411**	64	1588	428	1589	427	**1589**	**427**
465.tonto	128	**1968**	**640**	1969	640	1965	641	128	**1191**	**1060**	1192	1060	1182	1070
470.lbm	128	3896	451	**3900**	**451**	3902	451	32	940	468	**939**	**468**	938	469
481.wrf	128	1761	812	1752	816	**1754**	**815**	128	**1637**	**873**	1636	874	1638	873
482.sphinx3	128	3184	784	3167	788	**3182**	**784**	128	3192	782	**3142**	**794**	3139	795

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
ulimit -s (stack) set to 1048576.
Large pages reserved as follows by root user:
    echo 8448 > /proc/sys/vm/nr_hugepages
System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.
    export HUGETLB_VERBOSE=0
    export HUGETLB_MORECORE=yes
    export XLFRTEOPTS=intrinthds=1
```

General Notes

```
The "IBM Power 750 Express (3.3 GHz)" and "IBM Power 755 (3.3 GHz)"
are electronically equivalent. The results have been measured on the
"IBM Power 755 (3.3 GHz)"

IBM Post-Link optimization tool with
    options "-O4 -omullX -see 0 -m power6" used for
       433.milc 435.gromacs 436.cactusADM 482.sphinx3
    options "-O4 -omullX -see 1" used for
       436.cactusADM
    options "-O4 -omullX -see 1 -ihf -1" used for
       453.povray
    options "-O4" used for
       465.tonto
     Whenever option "-omullX" was used during the optimization phase,
       option "-imullX" was also used during the instrumentation phase.

Benchmarks bound to a processor using numactl on the submit command.
See flags file for details on settings.
```

Base Compiler Invocation

C benchmarks:
```
xlc -qlanglvl=extc99
```

C++ benchmarks:
```
xlC
```

Fortran benchmarks:
```
xlf95
```

Benchmarks using both Fortran and C:
```
xlc -qlanglvl=extc99 xlf95
```

Base Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:
```
-O5 -qnoenablevmx -lhugetlbfs
```

C++ benchmarks:
```
-O5 -qrtti -qnoenablevmx -qstaticlink
-Wl,--whole-archive /usr/lib/libhugetlbfs.a -Wl,--no-whole-archive
```

Fortran benchmarks:
```
-O5 -qsmallstack=dynlenonheap -qalias=nostd -qnoenablevmx
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:
```
-O5 -qnoenablevmx -qsmallstack=dynlenonheap -qalias=nostd
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
```

Base Other Flags

C benchmarks:
```
-qipa=noobject -qipa=threads
```

C++ benchmarks:
```
-qipa=noobject -qipa=threads
```

Fortran benchmarks:
```
-qipa=noobject -qipa=threads
```

Benchmarks using both Fortran and C:
```
-qipa=noobject -qipa=threads
```

Peak Compiler Invocation

C benchmarks:
```
xlc -qlanglvl=extc99
```

C++ benchmarks:
```
xlC
```

Fortran benchmarks:
```
xlf95
```

Benchmarks using both Fortran and C:
```
xlc -qlanglvl=extc99 xlf95
```

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -Wl,-q -O5 -qnoenablevmx -lhugetlbfs

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
-q64

482.sphinx3: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfs

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5

447.dealII: -O5 -qrtti -qnoenablevmx -qstaticlink -Wl,-z,muldefs
-Wl,--whole-archive /usr/lib/libsmartheap.a
-Wl,--no-whole-archive

450.soplex: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qstrict -lhugetlbfs

453.povray: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lsmartheap

Fortran benchmarks:

410.bwaves: -O5 -qsmallstack=dynlenonheap -lhugetlbfs

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qalias=nostd
-qnoenablevmx

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qxlf90=nosignedzero -B/usr/share/libhugetlbfs/ -tl
-Wl,--hugetlbfs-link=BDT

437.leslie3d: -O5 -qsmallstack=dynlenonheap -qnoenablevmx
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: `-O5 -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT -q64`

465.tonto: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -q64 -lsmartheap64`

Benchmarks using both Fortran and C:

435.gromacs: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -lhugetlbfs`

436.cactusADM: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O2 -qarch=auto -qtune=auto -qnostrict -lhugetlbfs`

454.calculix: `-O4 -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT`

481.wrf: `-O5 -qnoenablevmx -q64 -lhugetlbfs`

Peak Other Flags

C benchmarks:
`-qipa=noobject -qipa=threads`

C++ benchmarks:
`-qipa=noobject -qipa=threads`

Fortran benchmarks:
`-qipa=noobject -qipa=threads`

Benchmarks using both Fortran and C:
`-qipa=noobject -qipa=threads`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:47:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 March 2010.