



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS


NovaScale R460 F2
(Intel Xeon E5520, 2.27 GHz)

SPECint[®]2006 = 29.6

SPECint_base2006 = 27.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

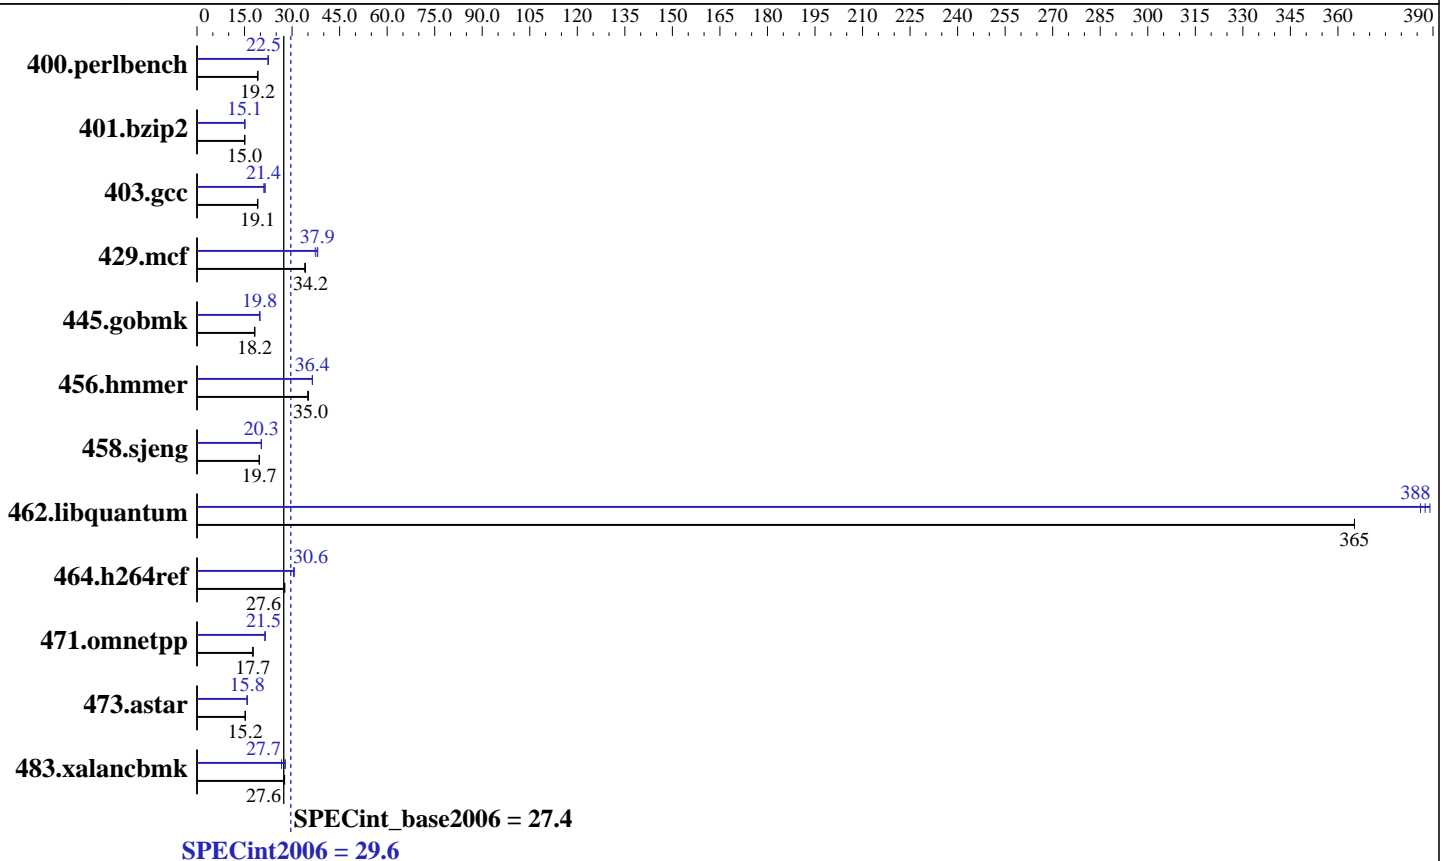

Hardware

CPU Name: Intel Xeon E5520
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 1066 MHz)
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon E5520, 2.27 GHz)

SPECint2006 = 29.6

SPECint_base2006 = 27.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	511	19.1	<u>510</u>	<u>19.2</u>	509	19.2	<u>434</u>	<u>22.5</u>	436	22.4	434	22.5
401.bzip2	640	15.1	642	15.0	<u>641</u>	<u>15.0</u>	640	15.1	<u>640</u>	<u>15.1</u>	639	15.1
403.gcc	420	19.2	421	19.1	<u>421</u>	<u>19.1</u>	374	21.5	382	21.1	<u>377</u>	<u>21.4</u>
429.mcf	<u>267</u>	<u>34.2</u>	268	34.0	267	34.2	244	37.3	239	38.1	<u>240</u>	<u>37.9</u>
445.gobmk	578	18.2	574	18.3	<u>578</u>	<u>18.2</u>	529	19.8	<u>530</u>	<u>19.8</u>	530	19.8
456.hammer	265	35.2	<u>266</u>	<u>35.0</u>	267	35.0	256	36.4	<u>256</u>	<u>36.4</u>	256	36.4
458.sjeng	614	19.7	616	19.6	<u>615</u>	<u>19.7</u>	596	20.3	<u>596</u>	<u>20.3</u>	595	20.3
462.libquantum	<u>56.7</u>	<u>365</u>	56.7	365	56.7	365	53.7	386	<u>53.5</u>	<u>388</u>	53.3	389
464.h264ref	798	27.7	<u>802</u>	<u>27.6</u>	802	27.6	722	30.6	725	30.5	<u>722</u>	<u>30.6</u>
471.omnetpp	<u>354</u>	<u>17.7</u>	355	17.6	354	17.7	291	21.5	<u>291</u>	<u>21.5</u>	291	21.5
473.astar	<u>461</u>	<u>15.2</u>	461	15.2	461	15.2	444	15.8	<u>443</u>	<u>15.8</u>	442	15.9
483.xalancbmk	250	27.6	<u>250</u>	<u>27.6</u>	250	27.6	<u>249</u>	<u>27.7</u>	259	26.7	248	27.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
The Dell PowerEdge R710 and
the Bull NovaScale R460 F2 models are electronically equivalent.
The results have been measured on a Bull NovaScale R460 F2 model.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon E5520, 2.27 GHz)

SPECint2006 = 29.6

SPECint_base2006 = 27.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Base Portability Flags (Continued)

403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-64bit -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon E5520, 2.27 GHz)

SPECint2006 = 29.6

SPECint_base2006 = 27.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
-auto-ilp32 -opt-prefetch -ansi-alias
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3 -auto-ilp32
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -par-schedule-static=32768 -ansi-alias
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon E5520, 2.27 GHz)

SPECint2006 = 29.6

SPECint_base2006 = 27.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
              -Wl,-z,muldefs
              -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 07:40:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 April 2010.