



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 283

PowerEdge T610 (Intel Xeon L5640, 2.26 GHz)

SPECint\_rate\_base2006 = 264

CPU2006 license: 55


Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

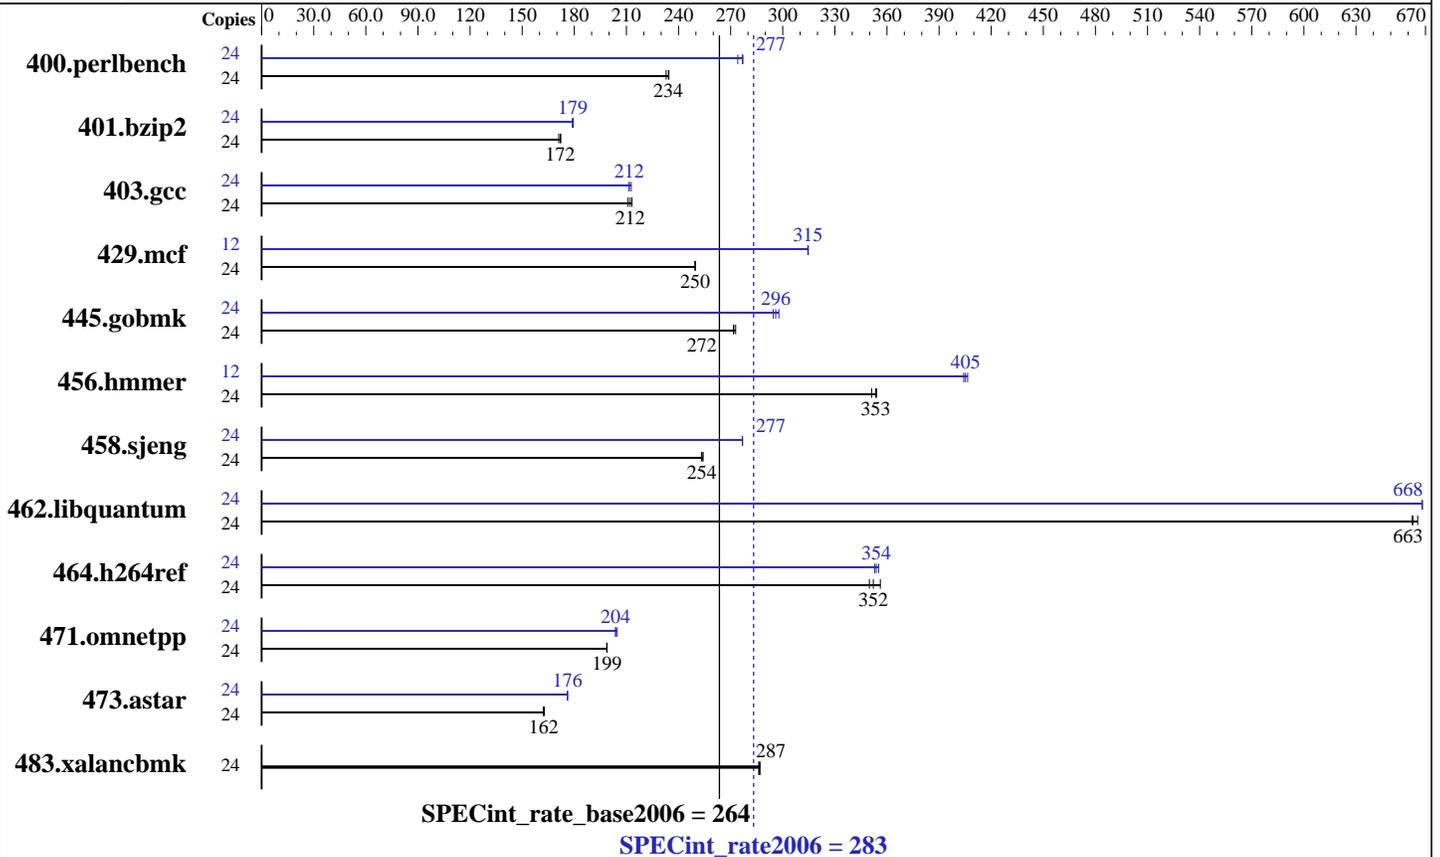

## Hardware

CPU Name: Intel Xeon L5640  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 283

PowerEdge T610 (Intel Xeon L5640, 2.26 GHz)

SPECint\_rate\_base2006 = 264

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	1000	234	<b><u>1001</u></b>	<b><u>234</u></b>	1007	233	24	846	277	<b><u>847</u></b>	<b><u>277</u></b>	855	274
401.bzip2	24	1354	171	1345	172	<b><u>1347</u></b>	<b><u>172</u></b>	24	1295	179	1291	179	<b><u>1292</u></b>	<b><u>179</u></b>
403.gcc	24	906	213	<b><u>910</u></b>	<b><u>212</u></b>	916	211	24	908	213	913	212	<b><u>913</u></b>	<b><u>212</u></b>
429.mcf	24	878	249	<b><u>877</u></b>	<b><u>250</u></b>	876	250	12	348	314	<b><u>348</u></b>	<b><u>315</u></b>	348	315
445.gobmk	24	923	273	<b><u>926</u></b>	<b><u>272</u></b>	927	272	24	846	298	855	295	<b><u>851</u></b>	<b><u>296</u></b>
456.hammer	24	<b><u>634</u></b>	<b><u>353</u></b>	638	351	633	354	12	275	406	277	404	<b><u>276</u></b>	<b><u>405</u></b>
458.sjeng	24	1147	253	<b><u>1145</u></b>	<b><u>254</u></b>	1143	254	24	1049	277	<b><u>1049</u></b>	<b><u>277</u></b>	1049	277
462.libquantum	24	747	666	<b><u>750</u></b>	<b><u>663</u></b>	751	662	24	744	668	<b><u>744</u></b>	<b><u>668</u></b>	744	668
464.h264ref	24	1491	356	1518	350	<b><u>1508</u></b>	<b><u>352</u></b>	24	<b><u>1501</u></b>	<b><u>354</u></b>	1505	353	1495	355
471.omnetpp	24	755	199	<b><u>755</u></b>	<b><u>199</u></b>	754	199	24	736	204	733	205	<b><u>736</u></b>	<b><u>204</u></b>
473.astar	24	<b><u>1038</u></b>	<b><u>162</u></b>	1035	163	1039	162	24	957	176	<b><u>957</u></b>	<b><u>176</u></b>	957	176
483.xalancbmk	24	577	287	<b><u>578</u></b>	<b><u>287</u></b>	579	286	24	577	287	<b><u>578</u></b>	<b><u>287</u></b>	579	286

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
The Dell PowerEdge T610 and  
the Bull NovaScale T840 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge T610 model.

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 283

PowerEdge T610 (Intel Xeon L5640, 2.26 GHz)

SPECint\_rate\_base2006 = 264

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 283

PowerEdge T610 (Intel Xeon L5640, 2.26 GHz)

SPECint\_rate\_base2006 = 264

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 283

PowerEdge T610 (Intel Xeon L5640, 2.26 GHz)

SPECint\_rate\_base2006 = 264

CPU2006 license: 55

Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 11:11:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 July 2010.