SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS2000 (Intel Xeon X5675)

SPECfp®_rate2006 = 254

SPECfp_rate_base2006 = 248

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Mar-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

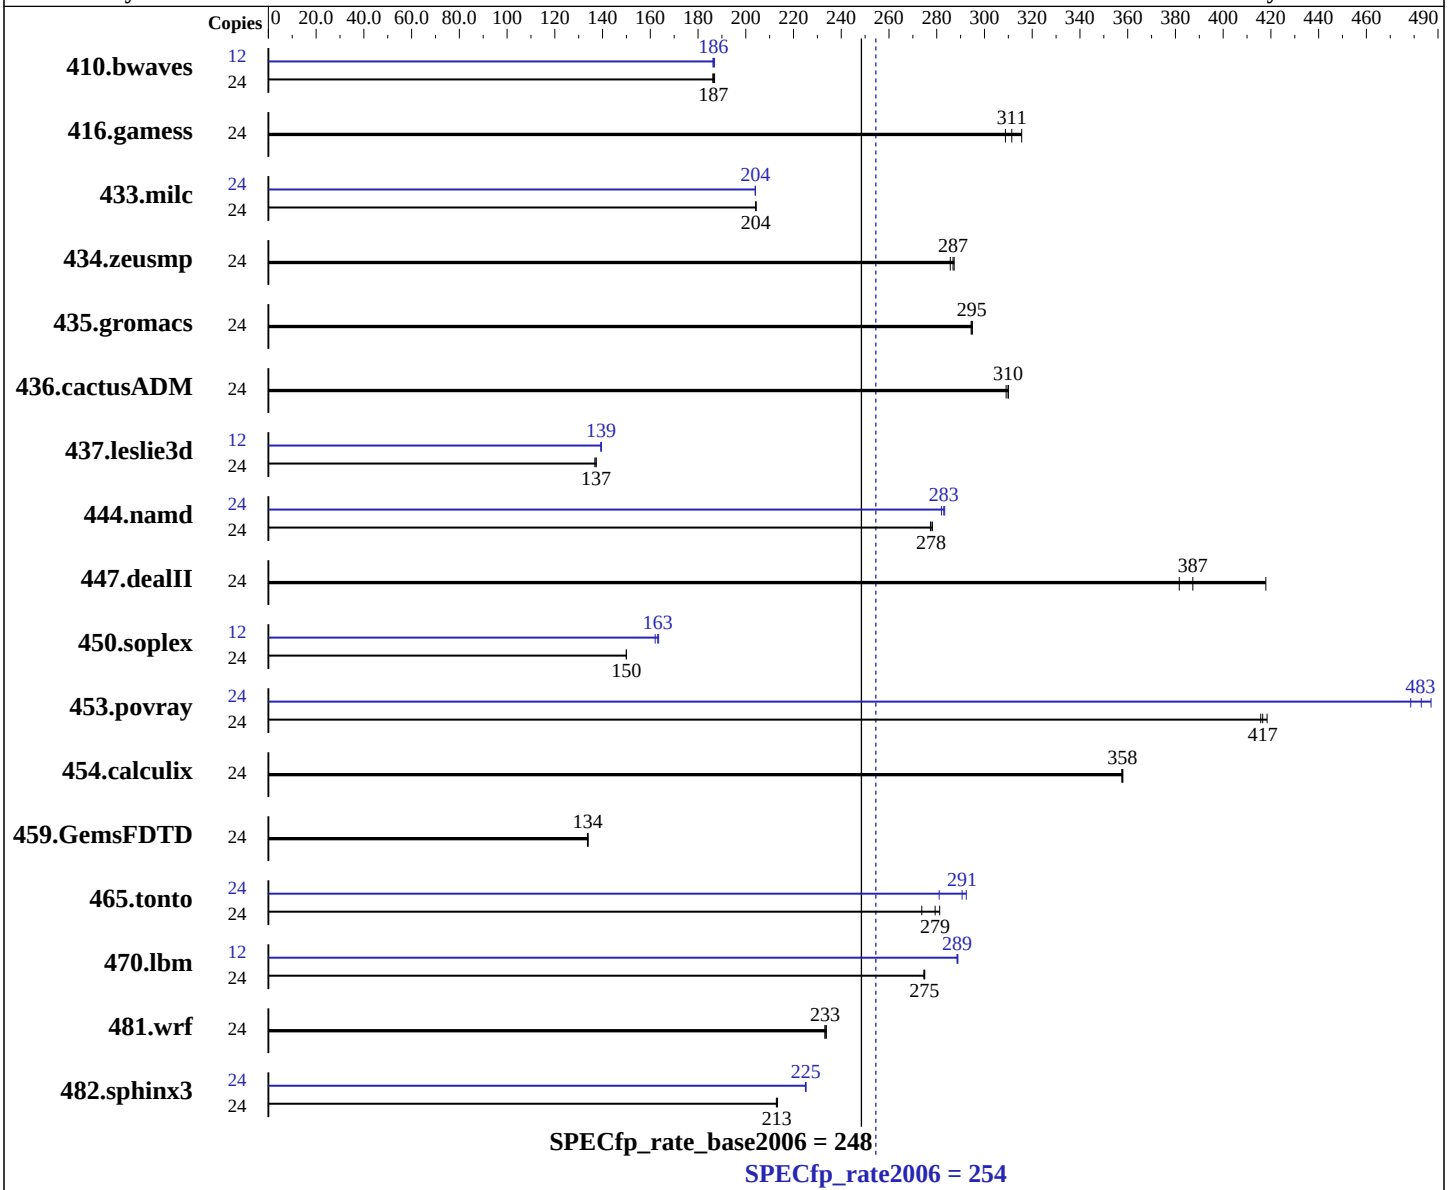

Hardware

CPU Name:	Intel Xeon X5675
CPU Characteristics:	Intel Turbo Boost Technology up to 3.46 GHz
CPU MHz:	3066
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.4.3, Advanced Platform, Kernel 2.6.18-164.9.1.el5 on an x86_64
Compiler:	Intel C++ Compiler XE for Linux Version 12.0.2.137 Build 20110112 Intel Fortran Compiler XE for Linux Version 12.0.2.137 Build 20110112
Auto Parallel:	No
File System:	ext3

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS2000 (Intel Xeon X5675)

SPECfp_rate2006 = 254

SPECfp_rate_base2006 = 248

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Mar-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 1333 MHz)
Disk Subsystem: 2 x 146 GB 10000 rpm SAS RAID1 configuration
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1745	187	**1749**	**187**	1752	186	12	876	186	872	187	**875**	**186**
416.gamess	24	**1509**	**311**	1489	316	1522	309	24	**1509**	**311**	1489	316	1522	309
433.milc	24	1078	204	**1079**	**204**	1079	204	24	1080	204	1080	204	**1080**	**204**
434.zeusmp	24	**761**	**287**	760	287	765	286	24	**761**	**287**	760	287	765	286
435.gromacs	24	582	294	581	295	**581**	**295**	24	582	294	581	295	**581**	**295**
436.cactusADM	24	928	309	**926**	**310**	925	310	24	928	309	**926**	**310**	925	310
437.leslie3d	24	1643	137	**1643**	**137**	1650	137	12	809	140	**809**	**139**	810	139
444.namd	24	694	277	**693**	**278**	692	278	24	**680**	**283**	683	282	679	283
447.dealII	24	719	382	657	418	**709**	**387**	24	719	382	657	418	**709**	**387**
450.soplex	24	**1335**	**150**	1334	150	1335	150	12	612	164	618	162	**614**	**163**
453.povray	24	305	418	**307**	**417**	307	416	24	262	487	267	479	**264**	**483**
454.calculix	24	**553**	**358**	554	358	553	358	24	**553**	**358**	554	358	553	358
459.GemsFDTD	24	**1903**	**134**	1905	134	1901	134	24	**1903**	**134**	1905	134	1901	134
465.tonto	24	840	281	**845**	**279**	863	274	24	**813**	**291**	840	281	808	292
470.lbm	24	1199	275	**1200**	**275**	1201	275	12	**571**	**289**	571	289	571	289
481.wrf	24	1150	233	1147	234	**1149**	**233**	24	1150	233	1147	234	**1149**	**233**
482.sphinx3	24	2193	213	2198	213	**2195**	**213**	24	2077	225	2079	225	**2078**	**225**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 '/usr/bin/numactl' used to bind processes to CPUs
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Large pages were disabled for this run
```

Platform Notes

```
BIOS Settings:
Data Reuse Optimization = Disabled
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html
http://www.spec.org/cpu2006/flags/PlatformHitachi.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml
http://www.spec.org/cpu2006/flags/PlatformHitachi.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 18:59:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 April 2011.