



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon X5672,
3.2 GHz)

SPECfp®_rate2006 = 229

SPECfp_rate_base2006 = 223

CPU2006 license: 97


Test date: Jun-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

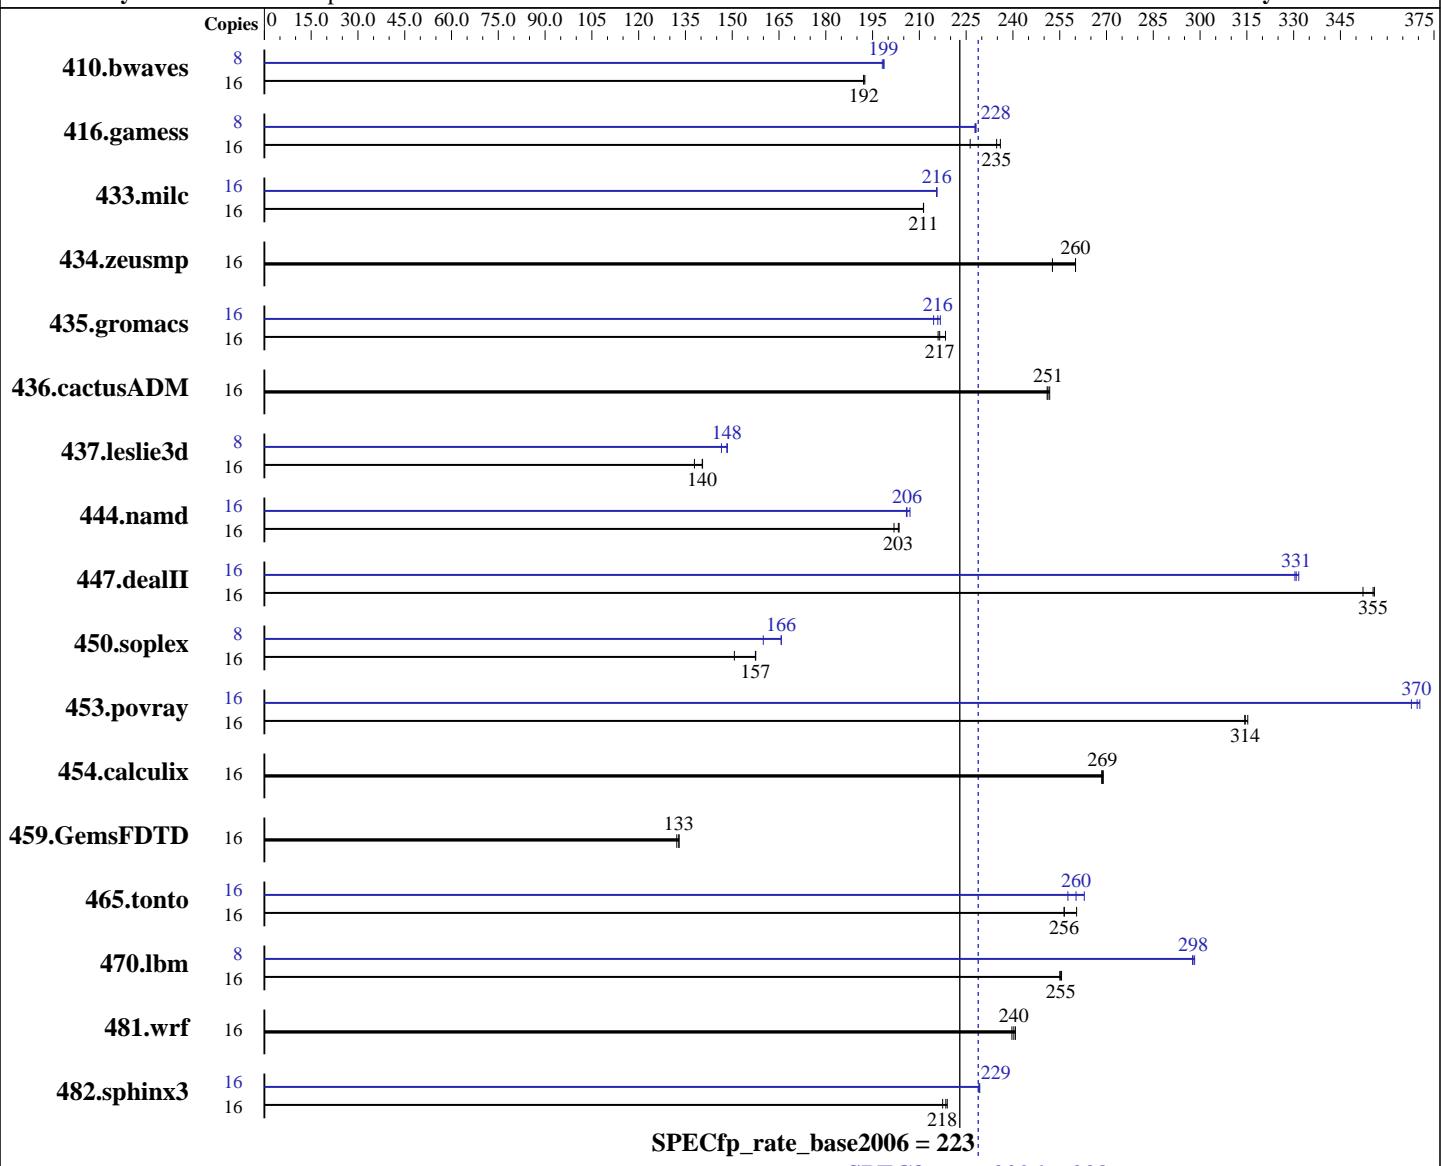

Hardware

CPU Name: Intel Xeon X5672
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 3200
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
Auto Parallel: No
File System: ReiserFS
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon X5672, 3.2 GHz)

SPECfp_rate2006 = 229

SPECfp_rate_base2006 = 223

CPU2006 license: 97

Test date: Jun-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 1000 GB SATA 7200RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1129	193	<u>1132</u>	<u>192</u>	1132	192	8	<u>548</u>	<u>199</u>	547	199	549	198
416.gamess	16	1328	236	1384	226	<u>1334</u>	<u>235</u>	8	<u>687</u>	<u>228</u>	686	228	688	228
433.milc	16	<u>695</u>	<u>211</u>	695	211	695	211	16	682	216	<u>681</u>	<u>216</u>	681	216
434.zeusmp	16	560	260	<u>560</u>	<u>260</u>	576	253	16	560	260	<u>560</u>	<u>260</u>	576	253
435.gromacs	16	523	218	529	216	<u>528</u>	<u>217</u>	16	532	215	<u>529</u>	<u>216</u>	527	217
436.cactusADM	16	759	252	762	251	<u>761</u>	<u>251</u>	16	759	252	762	251	<u>761</u>	<u>251</u>
437.leslie3d	16	<u>1071</u>	<u>140</u>	1071	140	1091	138	8	513	147	<u>507</u>	<u>148</u>	507	148
444.namd	16	631	204	<u>631</u>	<u>203</u>	636	202	16	620	207	<u>623</u>	<u>206</u>	623	206
447.dealII	16	520	352	<u>515</u>	<u>355</u>	514	356	16	554	330	<u>553</u>	<u>331</u>	552	332
450.soplex	16	886	151	<u>848</u>	<u>157</u>	847	158	8	417	160	403	166	<u>403</u>	<u>166</u>
453.povray	16	271	314	270	315	<u>271</u>	<u>314</u>	16	<u>230</u>	<u>370</u>	230	370	231	368
454.calculix	16	491	269	<u>491</u>	<u>269</u>	492	268	16	491	269	<u>491</u>	<u>269</u>	492	268
459.GemsFDTD	16	1277	133	1284	132	<u>1278</u>	<u>133</u>	16	1277	133	1284	132	<u>1278</u>	<u>133</u>
465.tonto	16	<u>614</u>	<u>256</u>	605	260	614	256	16	611	258	<u>605</u>	<u>260</u>	599	263
470.lbm	16	860	256	<u>861</u>	<u>255</u>	862	255	8	369	298	<u>369</u>	<u>298</u>	369	298
481.wrf	16	742	241	746	240	<u>744</u>	<u>240</u>	16	742	241	746	240	<u>744</u>	<u>240</u>
482.sphinx3	16	1434	217	<u>1427</u>	<u>218</u>	1424	219	16	1360	229	<u>1361</u>	<u>229</u>	1361	229

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 Large pages were disabled for this run

Platform Notes

BIOS Settings:
 Fan speed = full speed (Default = Energy Saving)
 Data Reuse = Disabled (Default = Enabled)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon X5672,
3.2 GHz)

SPECfp_rate2006 = 229

SPECfp_rate_base2006 = 223

CPU2006 license: 97

Test date: Jun-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

General Notes

Binaries compiled on RHEL5.5

The Acer AW2000h-AW170h F1, Gateway GW2000h-GW170h F1, Acer AW2000ht-AW170ht F1 and Gateway GW2000ht-GW170ht F1 are electronically equivalent. This result was measured on Gateway GW2000ht-GW170ht F1.

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon X5672,
3.2 GHz)

SPECfp_rate2006 = 229

SPECfp_rate_base2006 = 223

CPU2006 license: 97

Test date: Jun-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon X5672,
3.2 GHz)

SPECfp_rate2006 = 229

SPECfp_rate_base2006 = 223

CPU2006 license: 97

Test date: Jun-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

Peak Optimization Flags

C benchmarks:

```
433.milc: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
```

```
470.lbm: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
          -ansi-alias -opt-prefetch -static -auto-ilp32
```

```
482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -unroll12
```

C++ benchmarks:

```
444.namd: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
```

```
450.soplex: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
             -B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT
```

```
453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias
              -B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

Fortran benchmarks:

```
410.bwaves: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -static
```

```
416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep -static
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xsse4.2 -ipo -O3 -no-prec-div
               -B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

```
459.GemsFDTD: basepeak = yes
```

```
465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
            -inline-alloc -opt-malloc-options=3
            -B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon X5672,
3.2 GHz)

SPECfp_rate2006 = 229

SPECfp_rate_base2006 = 223

CPU2006 license: 97

Test date: Jun-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -static -auto-ilp32
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:33:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 July 2011.