



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated


Gateway GW2000h-GW170h F1 (Intel Xeon X5670, 2.93GHz)

SPECfp®\_rate2006 = 260

SPECfp\_rate\_base2006 = 253

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Jun-2011  
Hardware Availability: Aug-2010  
Software Availability: Jan-2011

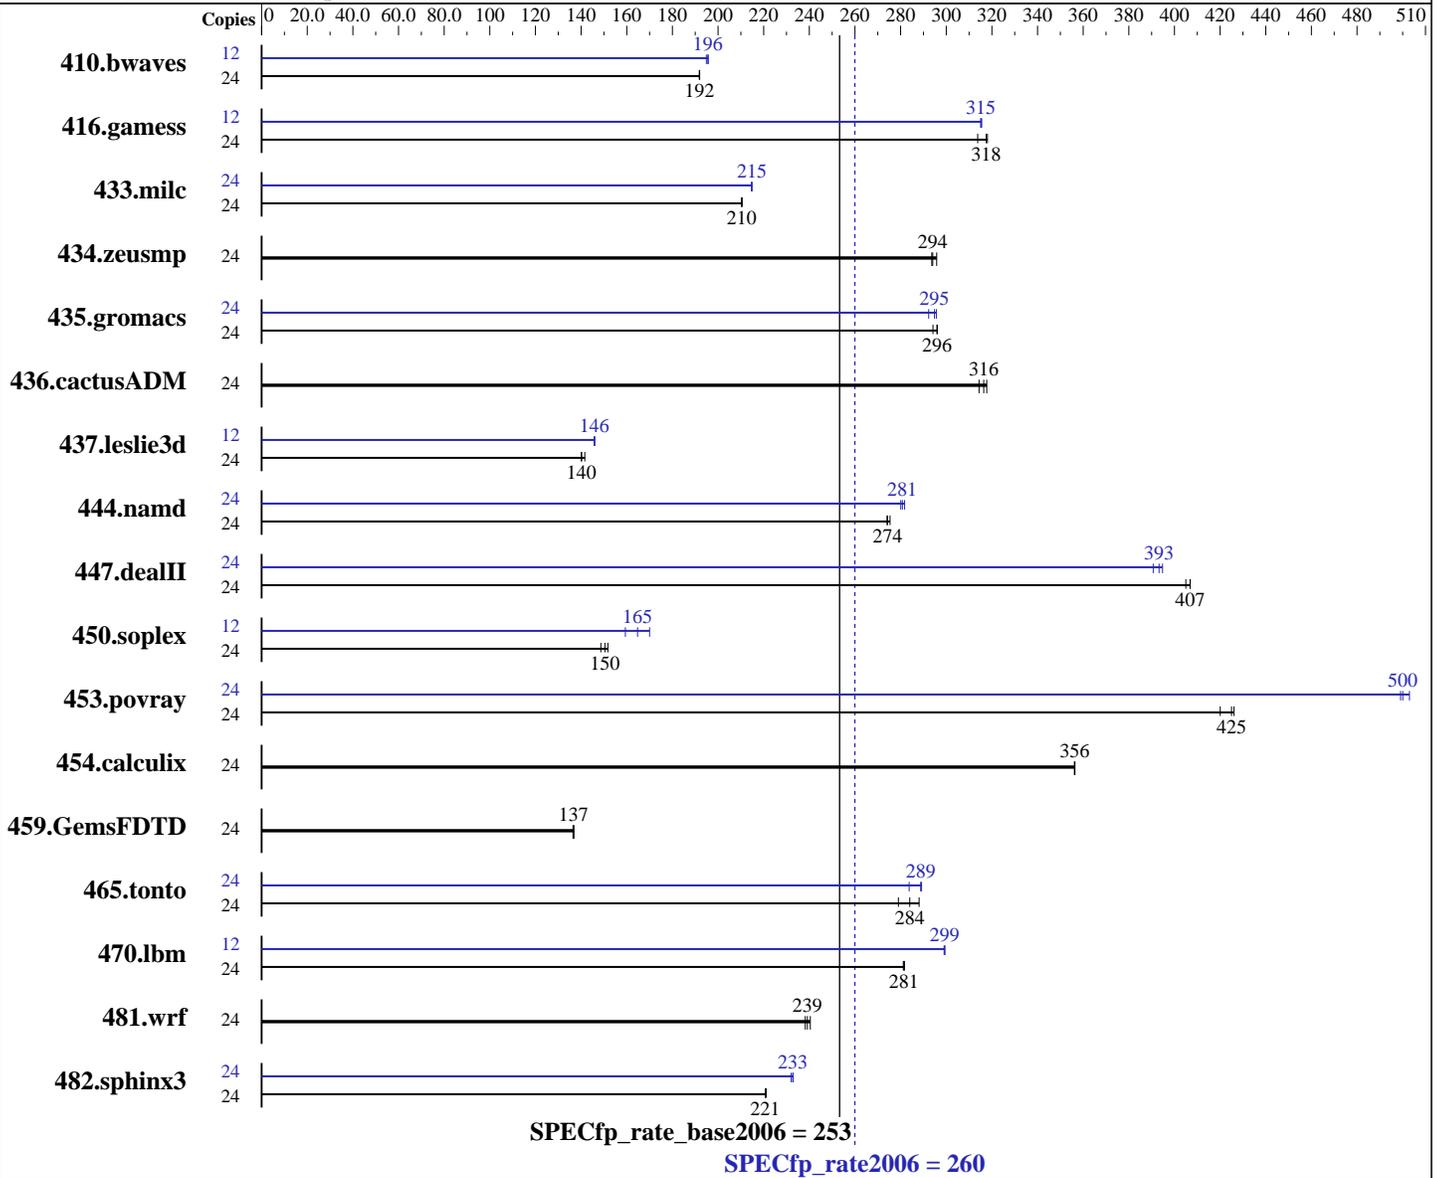

### Hardware

CPU Name: Intel Xeon X5670  
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
CPU MHz: 2933  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1, 2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
Auto Parallel: No  
File System: ReiserFS  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000h-GW170h F1 (Intel Xeon X5670, 2.93GHz)

SPECfp\_rate2006 = 260

SPECfp\_rate\_base2006 = 253

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Jun-2011  
Hardware Availability: Aug-2010  
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 1000 GB SATA 7200RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1699	192	<u>1700</u>	<u>192</u>	1700	192	12	833	196	<u>834</u>	<u>196</u>	837	195
416.gamess	24	1477	318	<u>1480</u>	<u>318</u>	1498	314	12	<u>745</u>	<u>315</u>	746	315	745	316
433.milc	24	1048	210	<u>1047</u>	<u>210</u>	1046	211	24	1026	215	<u>1025</u>	<u>215</u>	1025	215
434.zeusmp	24	738	296	<u>743</u>	<u>294</u>	744	294	24	738	296	<u>743</u>	<u>294</u>	744	294
435.gromacs	24	<u>579</u>	<u>296</u>	579	296	582	294	24	<u>581</u>	<u>295</u>	580	296	586	292
436.cactusADM	24	912	314	903	318	<u>906</u>	<u>316</u>	24	912	314	903	318	<u>906</u>	<u>316</u>
437.leslie3d	24	<u>1609</u>	<u>140</u>	1593	142	1610	140	12	774	146	<u>773</u>	<u>146</u>	773	146
444.namd	24	702	274	<u>702</u>	<u>274</u>	699	275	24	683	282	<u>686</u>	<u>281</u>	687	280
447.dealII	24	678	405	675	407	<u>675</u>	<u>407</u>	24	703	391	695	395	<u>698</u>	<u>393</u>
450.soplex	24	1319	152	1347	149	<u>1331</u>	<u>150</u>	12	628	159	<u>608</u>	<u>165</u>	589	170
453.povray	24	300	426	<u>300</u>	<u>425</u>	304	420	24	256	499	<u>255</u>	<u>500</u>	254	503
454.calculix	24	556	356	556	356	<u>556</u>	<u>356</u>	24	556	356	556	356	<u>556</u>	<u>356</u>
459.GemsFDTD	24	1866	136	<u>1863</u>	<u>137</u>	1861	137	24	1866	136	<u>1863</u>	<u>137</u>	1861	137
465.tonto	24	846	279	<u>832</u>	<u>284</u>	820	288	24	832	284	817	289	<u>818</u>	<u>289</u>
470.lbm	24	<u>1172</u>	<u>281</u>	1171	282	1173	281	12	551	299	551	299	<u>551</u>	<u>299</u>
481.wrf	24	<u>1121</u>	<u>239</u>	1115	240	1125	238	24	<u>1121</u>	<u>239</u>	1115	240	1125	238
482.sphinx3	24	<u>2119</u>	<u>221</u>	2119	221	2115	221	24	2016	232	2008	233	<u>2010</u>	<u>233</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
Large pages were disabled for this run

## Platform Notes

BIOS Settings:  
Fan speed = full speed (Default = Energy Saving)  
Data Reuse = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000h-GW170h F1 (Intel Xeon X5670, 2.93GHz)

SPECfp\_rate2006 = 260

SPECfp\_rate\_base2006 = 253

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Jun-2011  
**Hardware Availability:** Aug-2010  
**Software Availability:** Jan-2011

## General Notes

Binaries compiled on RHEL5.5

The Acer AW2000h-AW170h F1, Gateway GW2000h-GW170h F1, Acer AW2000ht-AW170ht F1 and Gateway GW2000ht-GW170ht F1 are electronically equivalent. This result was measured on Gateway GW2000ht-GW170ht F1.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

Gateway GW2000h-GW170h F1 (Intel Xeon X5670, 2.93GHz)

**SPECfp\_rate2006 = 260**

**SPECfp\_rate\_base2006 = 253**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jun-2011

**Hardware Availability:** Aug-2010

**Software Availability:** Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
 416.gamess: `-DSPEC_CPU_LP64`  
 433.milc: `-DSPEC_CPU_LP64`  
 434.zeusmp: `-DSPEC_CPU_LP64`  
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
 437.leslie3d: `-DSPEC_CPU_LP64`  
 444.namd: `-DSPEC_CPU_LP64`  
 447.dealII: `-DSPEC_CPU_LP64`  
 453.povray: `-DSPEC_CPU_LP64`  
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
 459.GemsFDTD: `-DSPEC_CPU_LP64`  
 465.tonto: `-DSPEC_CPU_LP64`  
 470.lbm: `-DSPEC_CPU_LP64`  
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000h-GW170h F1 (Intel Xeon X5670, 2.93GHz)

**SPECfp\_rate2006 = 260**

**SPECfp\_rate\_base2006 = 253**

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Jun-2011  
**Hardware Availability:** Aug-2010  
**Software Availability:** Jan-2011

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000h-GW170h F1 (Intel Xeon X5670, 2.93GHz)

**SPECfp\_rate2006 = 260**

**SPECfp\_rate\_base2006 = 253**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jun-2011

**Hardware Availability:** Aug-2010

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:32:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 July 2011.