



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint®_rate2006 = 296

Acer AR380 F1 (Intel Xeon L5640)

SPECint_rate_base2006 = 277

CPU2006 license: 97


Test date: Jun-2011

Test sponsor: Acer Incorporated

Hardware Availability: Apr-2010

Tested by: Acer Incorporated

Software Availability: Jan-2011

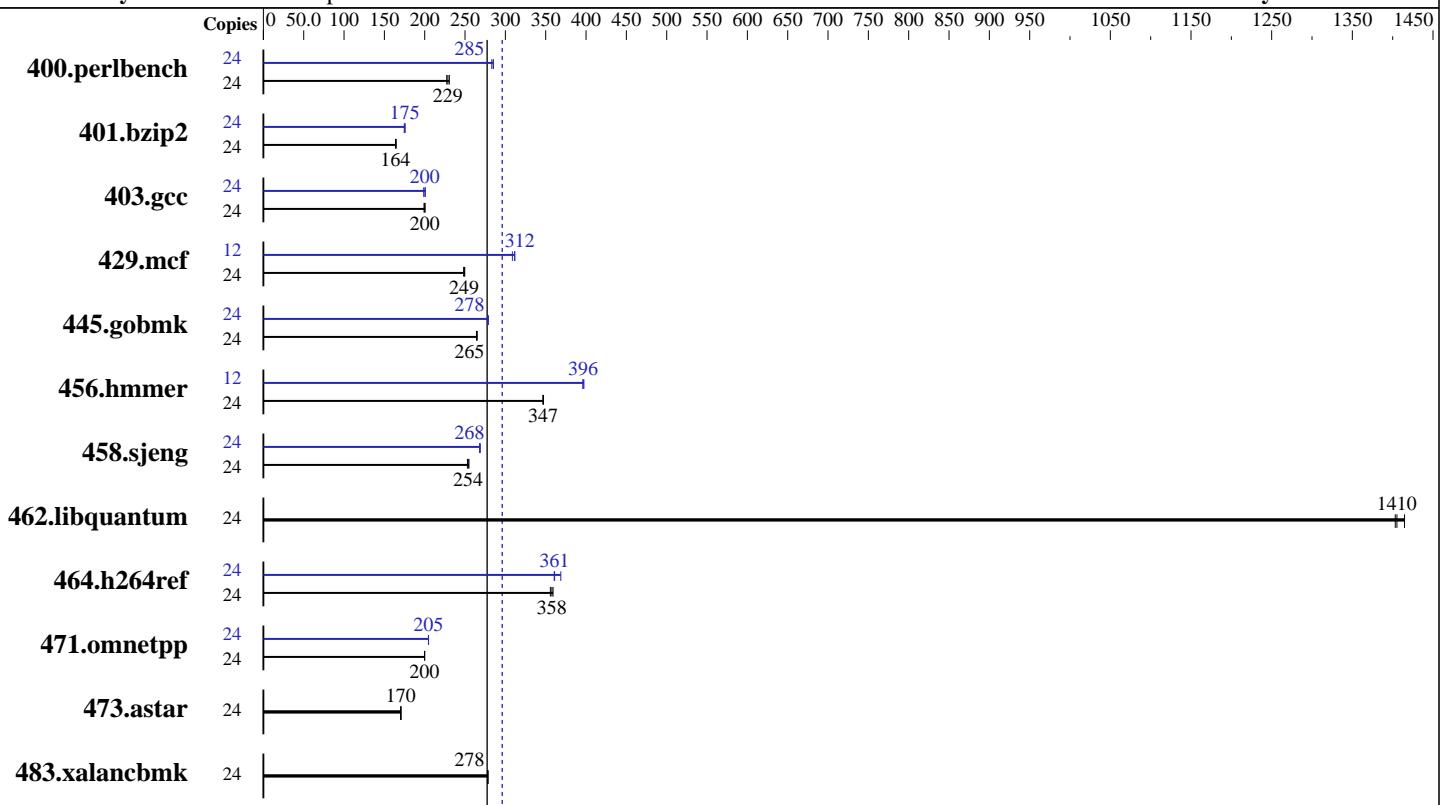

SPECint_rate_base2006 = 277

SPECint_rate2006 = 296

Hardware

CPU Name: Intel Xeon L5640
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz: 2267
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 300 GB SATA, 10000 RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 296

Acer AR380 F1 (Intel Xeon L5640)

SPECint_rate_base2006 = 277

CPU2006 license: 97

Test date: Jun-2011

Test sponsor: Acer Incorporated

Hardware Availability: Apr-2010

Tested by: Acer Incorporated

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	1017	231	1032	227	1025	229	24	823	285	828	283	823	285
401.bzip2	24	1406	165	1413	164	1414	164	24	1321	175	1326	175	1318	176
403.gcc	24	966	200	964	200	970	199	24	965	200	962	201	972	199
429.mcf	24	882	248	877	250	879	249	12	351	312	355	309	351	312
445.gobmk	24	953	264	950	265	951	265	24	903	279	905	278	904	278
456.hammer	24	645	347	646	347	645	347	12	283	396	283	396	282	397
458.sjeng	24	1144	254	1139	255	1148	253	24	1083	268	1083	268	1080	269
462.libquantum	24	352	1410	354	1410	354	1400	24	352	1410	354	1410	354	1400
464.h264ref	24	1485	358	1493	356	1479	359	24	1441	369	1473	361	1471	361
471.omnetpp	24	751	200	750	200	751	200	24	733	205	733	205	733	205
473.astar	24	987	171	989	170	990	170	24	987	171	989	170	990	170
483.xalancbmk	24	595	278	596	278	595	279	24	595	278	596	278	595	279

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
Large pages were disabled for this run

Platform Notes

BIOS Settings:
Fan speed = full speed (Default = Balanced)
Data Reuse = Disabled (Default = Enabled)

General Notes

Binaries compiled on RHEL5.5
This result was measured on the Gateway GR380 F1.
The Acer AR360 F1, AR380 F1, Gateway GR360 F1 are electronically equivalent

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 296

Acer AR380 F1 (Intel Xeon L5640)

SPECint_rate_base2006 = 277

CPU2006 license: 97

Test date: Jun-2011

Test sponsor: Acer Incorporated

Hardware Availability: Apr-2010

Tested by: Acer Incorporated

Software Availability: Jan-2011

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	SPECint_rate2006 =	296
Acer AR380 F1 (Intel Xeon L5640)	SPECint_rate_base2006 =	277

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2011

Hardware Availability: Apr-2010

Software Availability: Jan-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 296

Acer AR380 F1 (Intel Xeon L5640)

SPECint_rate_base2006 = 277

CPU2006 license: 97

Test date: Jun-2011

Test sponsor: Acer Incorporated

Hardware Availability: Apr-2010

Tested by: Acer Incorporated

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

471.omnetpp (continued):
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.20110608.html>
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.20110608.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 23:53:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 August 2011.