SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MP224 (Intel Xeon E5620)

SPECfp®_rate2006 = 180

SPECfp_rate_base2006 = 174

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jul-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

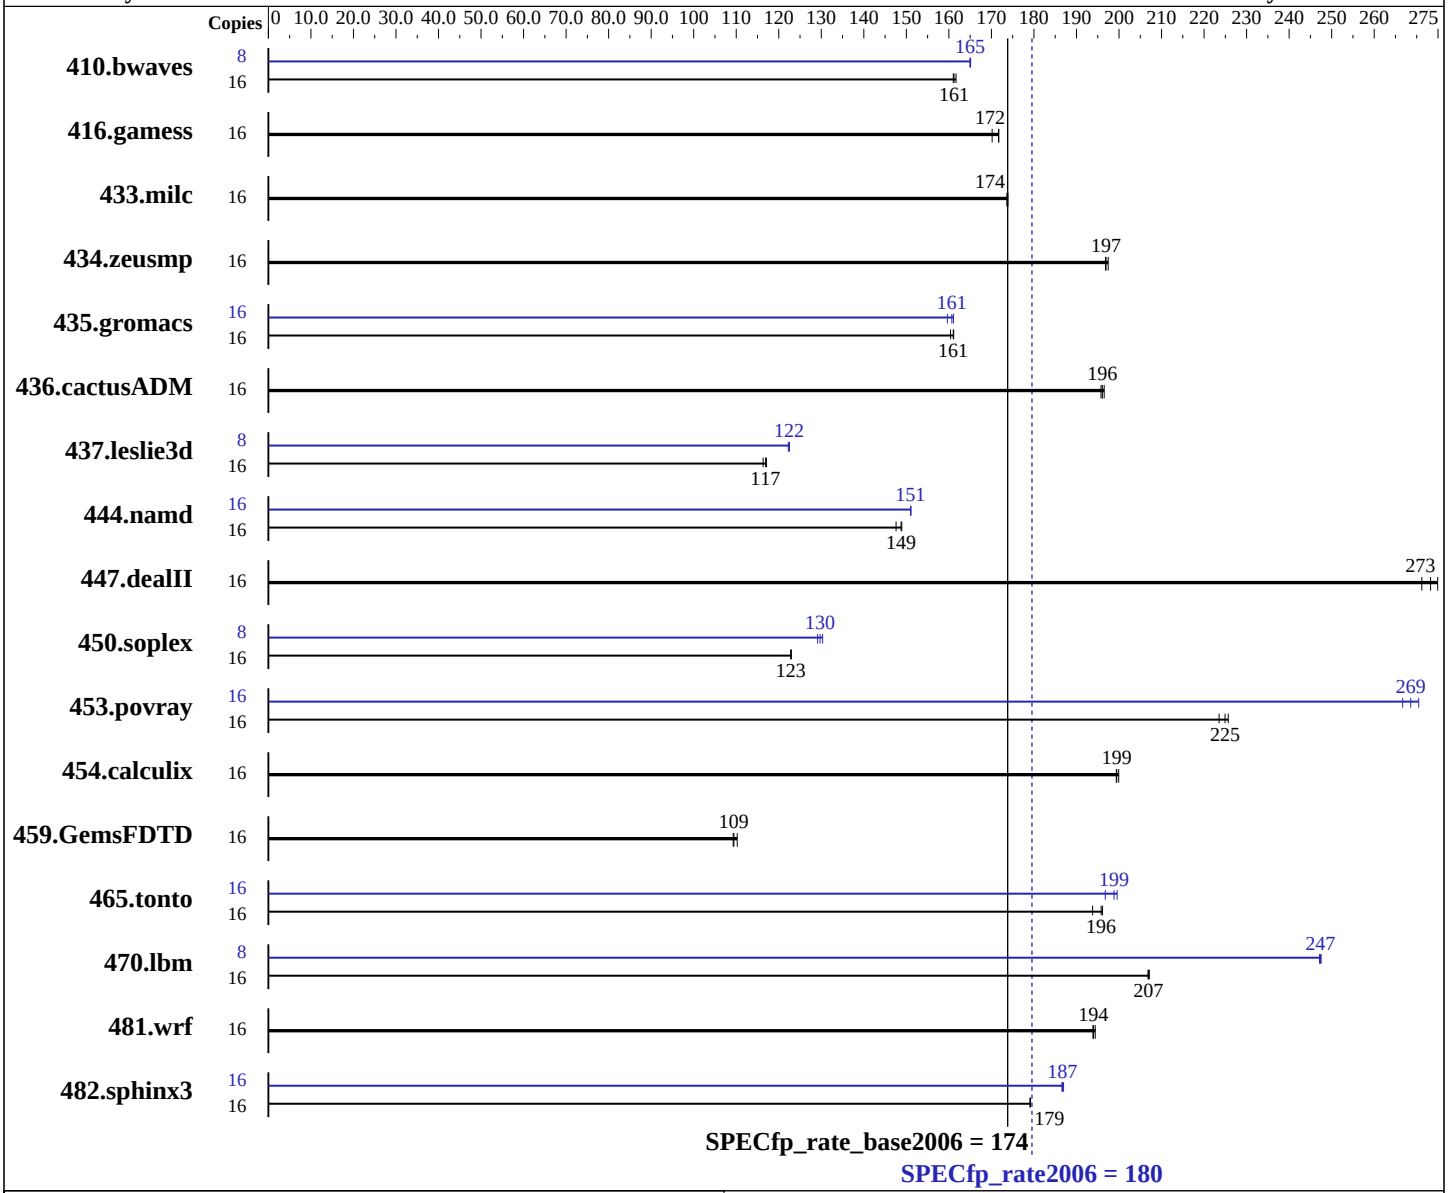

Hardware

CPU Name:	Intel Xeon E5620
CPU Characteristics:	Intel Turbo Boost Technology up to 2.67 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.2 Build 20110112
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MP224 (Intel Xeon E5620)

SPECfp_rate2006 = 180

SPECfp_rate_base2006 = 174

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jul-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB 2Rx4 PC3-8500R-7, ECC)
Disk Subsystem: 1 x 500 GB SATA-2, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1345	162	**1349**	**161**	1350	161	8	659	165	**659**	**165**	658	165
416.gamess	16	**1825**	**172**	1824	172	1841	170	16	**1825**	**172**	1824	172	1841	170
433.milc	16	**845**	**174**	846	174	845	174	16	**845**	**174**	846	174	845	174
434.zeusmp	16	740	197	737	197	**739**	**197**	16	740	197	737	197	**739**	**197**
435.gromacs	16	**709**	**161**	712	160	709	161	16	709	161	**711**	**161**	716	160
436.cactusADM	16	**975**	**196**	977	196	973	197	16	**975**	**196**	977	196	973	197
437.leslie3d	16	1293	116	**1286**	**117**	1284	117	8	615	122	**614**	**122**	614	123
444.namd	16	**863**	**149**	869	148	862	149	16	849	151	850	151	**850**	**151**
447.dealII	16	675	271	666	275	**670**	**273**	16	675	271	666	275	**670**	**273**
450.soplex	16	**1086**	**123**	1085	123	1086	123	8	517	129	**514**	**130**	512	130
453.povray	16	377	226	381	224	**378**	**225**	16	319	267	**317**	**269**	315	270
454.calculix	16	660	200	662	199	**662**	**199**	16	660	200	662	199	**662**	**199**
459.GemsFDTD	16	1540	110	1553	109	**1551**	**109**	16	1540	110	1553	109	**1551**	**109**
465.tonto	16	**804**	**196**	812	194	803	196	16	789	200	**792**	**199**	800	197
470.lbm	16	1061	207	1063	207	**1062**	**207**	8	**444**	**247**	444	248	445	247
481.wrf	16	922	194	919	194	**921**	**194**	16	922	194	919	194	**921**	**194**
482.sphinx3	16	1740	179	1741	179	**1741**	**179**	16	**1670**	**187**	1668	187	1671	187

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run
```

Platform Notes

```
Data Reuse disabled in BIOS.
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

Fortran benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

Benchmarks using both Fortran and C:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3`
`-ansi-alias -opt-prefetch -static -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2`

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html
http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml
http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:00:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.