SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX115 (Intel Xeon E3-1220)

SPECfp®_rate2006 = 108

SPECfp_rate_base2006 = 106

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Mar-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

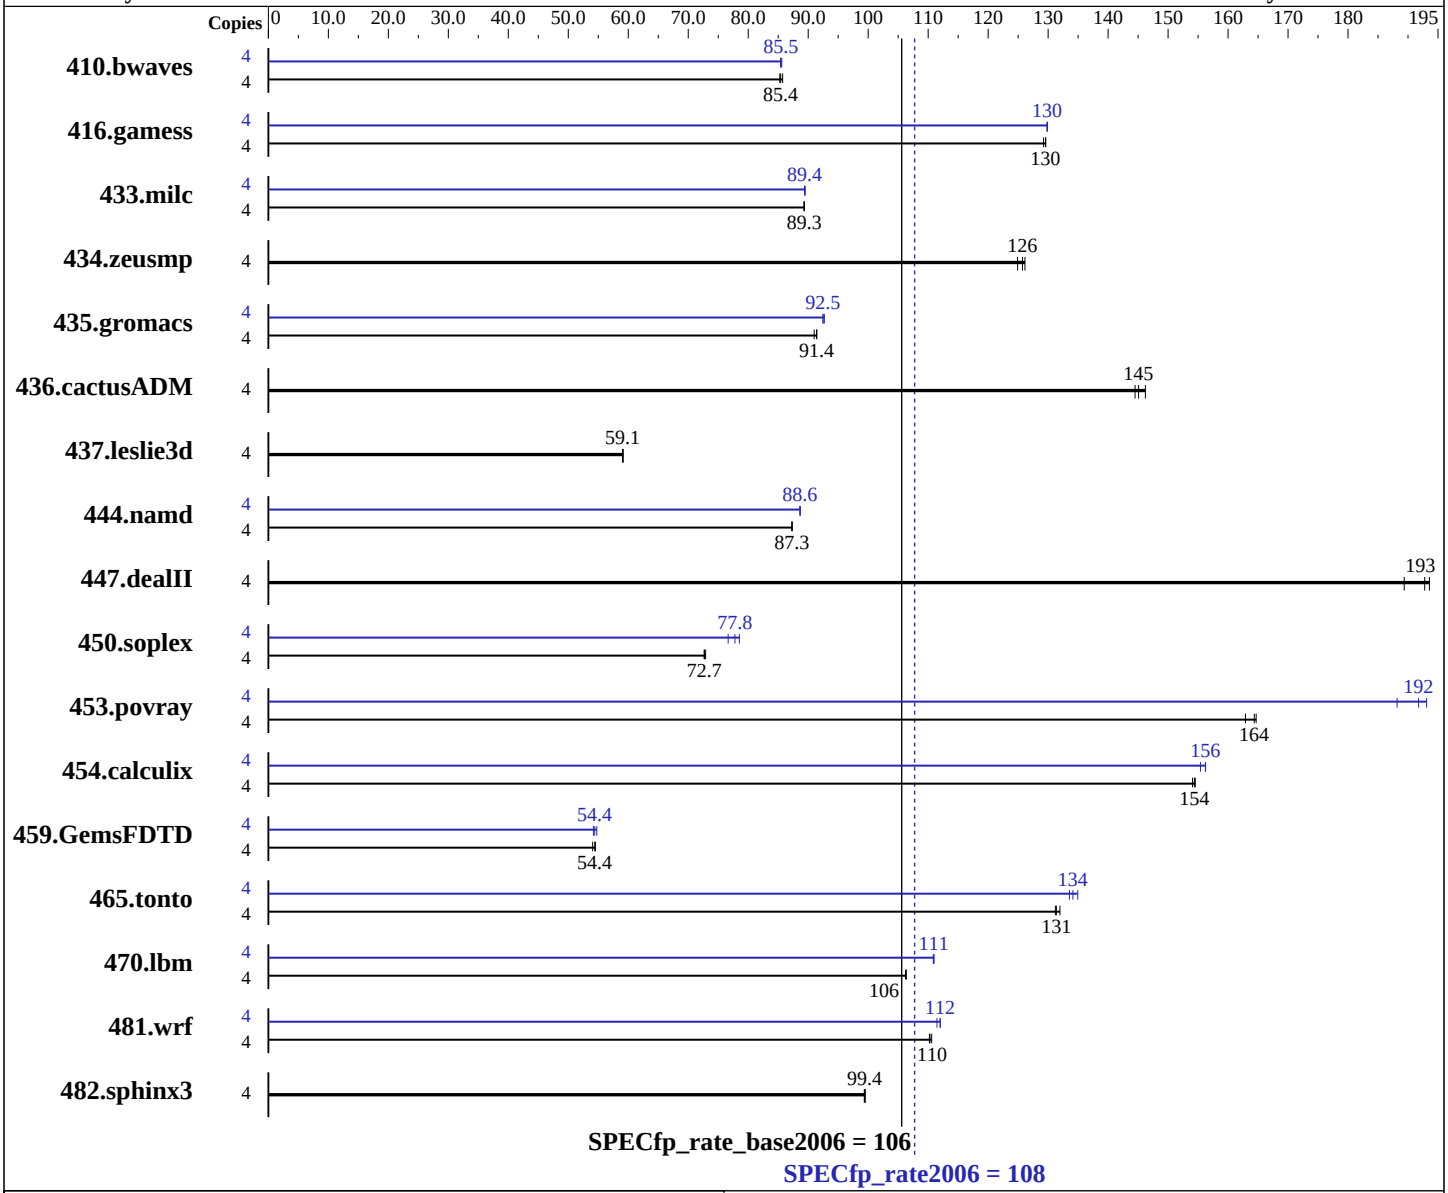

Hardware

CPU Name:	Intel Xeon E3-1220
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, 2.6.32-220.el6.x86_64
Compiler:	C/C++/Fortran: Version 12.1.0 of Intel Compiler XE Build 20111011
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX115 (Intel Xeon E3-1220)

SPECfp_rate2006 = 108

SPECfp_rate_base2006 = 106

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Mar-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (4 x 2 GB 2Rx8 PC3-10600U-9, ECC)
Disk Subsystem: 500 GB, SATA-2, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	634	85.7	638	85.3	**636**	**85.4**	4	635	85.6	637	85.4	**636**	**85.5**
416.gamess	4	**604**	**130**	606	129	604	130	4	603	130	**603**	**130**	603	130
433.milc	4	411	89.3	411	89.3	**411**	**89.3**	4	410	89.5	411	89.4	**411**	**89.4**
434.zeusmp	4	289	126	291	125	**290**	**126**	4	289	126	291	125	**290**	**126**
435.gromacs	4	314	91.0	312	91.4	**312**	**91.4**	4	308	92.7	**309**	**92.5**	309	92.5
436.cactusADM	4	327	146	**329**	**145**	331	144	4	327	146	**329**	**145**	331	144
437.leslie3d	4	636	59.1	636	59.1	**636**	**59.1**	4	636	59.1	636	59.1	**636**	**59.1**
444.namd	4	**367**	**87.3**	367	87.3	367	87.3	4	362	88.6	362	88.7	**362**	**88.6**
447.dealII	4	**237**	**193**	236	194	242	189	4	**237**	**193**	236	194	242	189
450.soplex	4	459	72.7	458	72.9	**459**	**72.7**	4	435	76.7	**429**	**77.8**	425	78.5
453.povray	4	**129**	**164**	131	163	129	165	4	**111**	**192**	110	193	113	188
454.calculix	4	**214**	**154**	214	155	214	154	4	**211**	**156**	212	155	211	156
459.GemsFDTD	4	785	54.1	778	54.5	**780**	**54.4**	4	783	54.2	**780**	**54.4**	775	54.7
465.tonto	4	300	131	298	132	**300**	**131**	4	292	135	**293**	**134**	295	134
470.lbm	4	**517**	**106**	517	106	517	106	4	**495**	**111**	495	111	496	111
481.wrf	4	404	111	**405**	**110**	405	110	4	401	111	**399**	**112**	399	112
482.sphinx3	4	785	99.4	**784**	**99.4**	783	99.5	4	785	99.4	**784**	**99.4**	783	99.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run
```

Base Compiler Invocation

C benchmarks:

```
icc   -m64
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -auto-ilp32
-opt-mem-layout-trans=3

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 07:19:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 April 2012.