



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint<sup>®</sup>\_rate2006 = 591

PRIMERGY CX250 S1, Intel Xeon E5-2660, 2.20 GHz

SPECint\_rate\_base2006 = 565

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

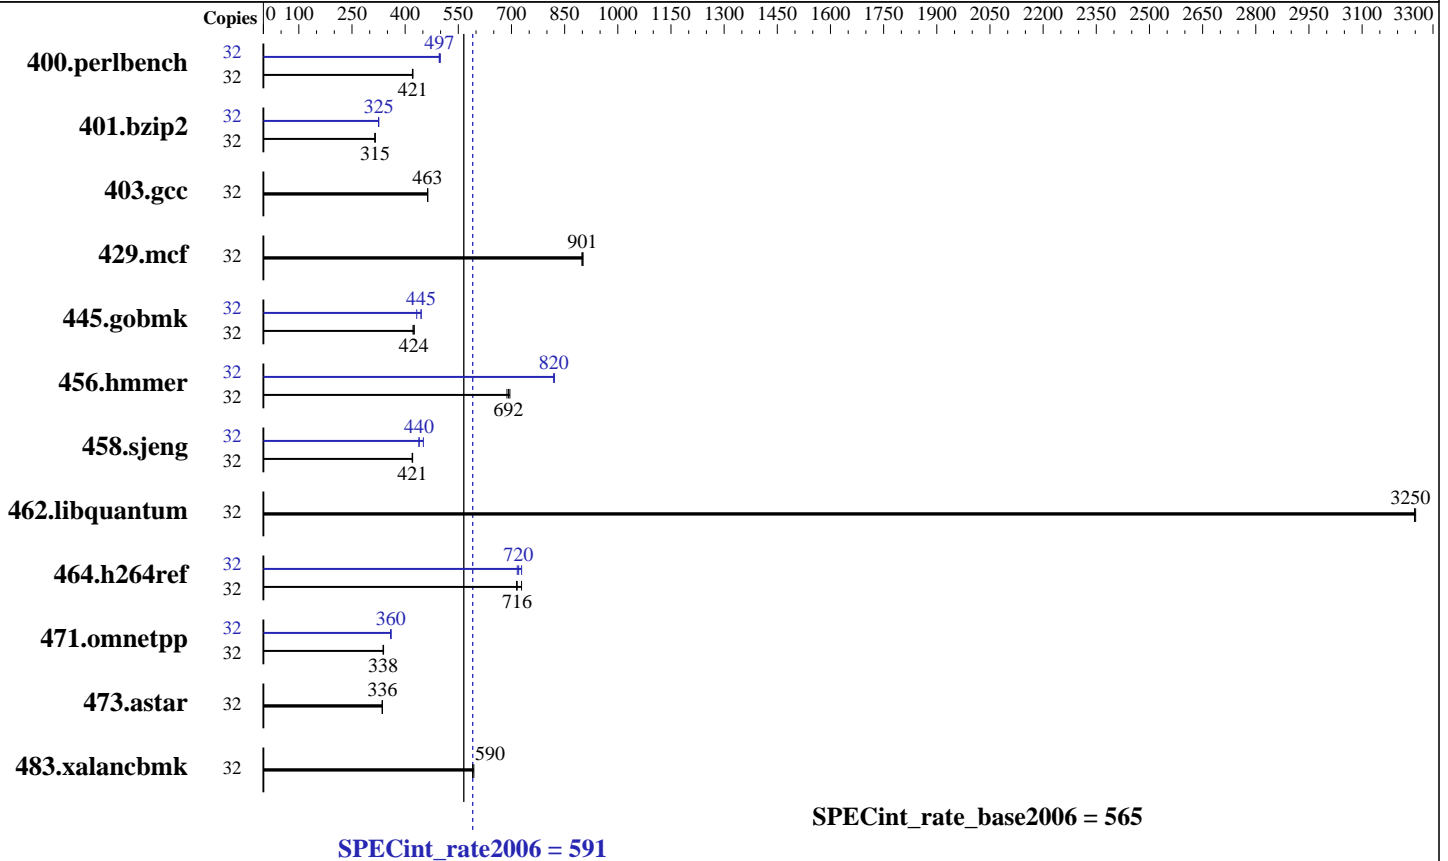

### Hardware

CPU Name: Intel Xeon E5-2660  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.0 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 591

PRIMERGY CX250 S1, Intel Xeon E5-2660, 2.20 GHz

SPECint\_rate\_base2006 = 565

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	743	421	741	422	<b>742</b>	<b>421</b>	32	630	496	626	499	<b>629</b>	<b>497</b>
401.bzip2	32	979	315	<b>980</b>	<b>315</b>	982	315	32	951	325	<b>949</b>	<b>325</b>	949	325
403.gcc	32	555	464	<b>556</b>	<b>463</b>	556	463	32	555	464	<b>556</b>	<b>463</b>	556	463
429.mcf	32	<b>324</b>	<b>901</b>	325	899	324	902	32	<b>324</b>	<b>901</b>	325	899	324	902
445.gobmk	32	795	422	<b>791</b>	<b>424</b>	788	426	32	754	445	776	433	<b>754</b>	<b>445</b>
456.hammer	32	434	687	429	696	<b>432</b>	<b>692</b>	32	364	821	364	819	<b>364</b>	<b>820</b>
458.sjeng	32	923	420	920	421	<b>920</b>	<b>421</b>	32	883	439	858	451	<b>881</b>	<b>440</b>
462.libquantum	32	<b>204</b>	<b>3250</b>	204	3250	204	3250	32	<b>204</b>	<b>3250</b>	204	3250	204	3250
464.h264ref	32	991	714	<b>989</b>	<b>716</b>	972	728	32	972	729	<b>983</b>	<b>720</b>	989	716
471.omnetpp	32	<b>591</b>	<b>338</b>	592	338	590	339	32	<b>556</b>	<b>360</b>	557	359	555	360
473.astar	32	<b>669</b>	<b>336</b>	670	335	669	336	32	<b>669</b>	<b>336</b>	670	335	669	336
483.xalancbmk	32	374	590	372	594	<b>374</b>	<b>590</b>	32	374	590	372	594	<b>374</b>	<b>590</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
This result was measured on the PRIMERGY CX250 S1. The PRIMERGY CX250 S1 and the PRIMERGY CX270 S1 are electronically equivalent.  
For information about Fujitsu please visit: <http://www.fujitsu.com>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 591**

PRIMERGY CX250 S1, Intel Xeon E5-2660, 2.20 GHz

**SPECint\_rate\_base2006 = 565**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64  
  
456.hmmer: icc -m64  
  
458.sjeng: icc -m64  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 591

PRIMERGY CX250 S1, Intel Xeon E5-2660, 2.20 GHz

SPECint\_rate\_base2006 = 565

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 591**

PRIMERGY CX250 S1, Intel Xeon E5-2660, 2.20 GHz

**SPECint\_rate\_base2006 = 565**

**CPU2006 license:** 19

**Test date:** Mar-2012

**Test sponsor:** Fujitsu

**Hardware Availability:** Jun-2012

**Tested by:** Fujitsu

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 10:38:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 July 2012.