SPEC® CFP2006 Result

Hewlett-Packard Company

ProLiant ML350p Gen8
(2.00 GHz, Intel Xeon E5-2620)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 322

CPU2006 license: 3		**Test date:**	Sep-2012
Test sponsor:	Hewlett-Packard Company	**Hardware Availability:**	Jun-2012
Tested by:	Hewlett-Packard Company	**Software Availability:**	Dec-2011

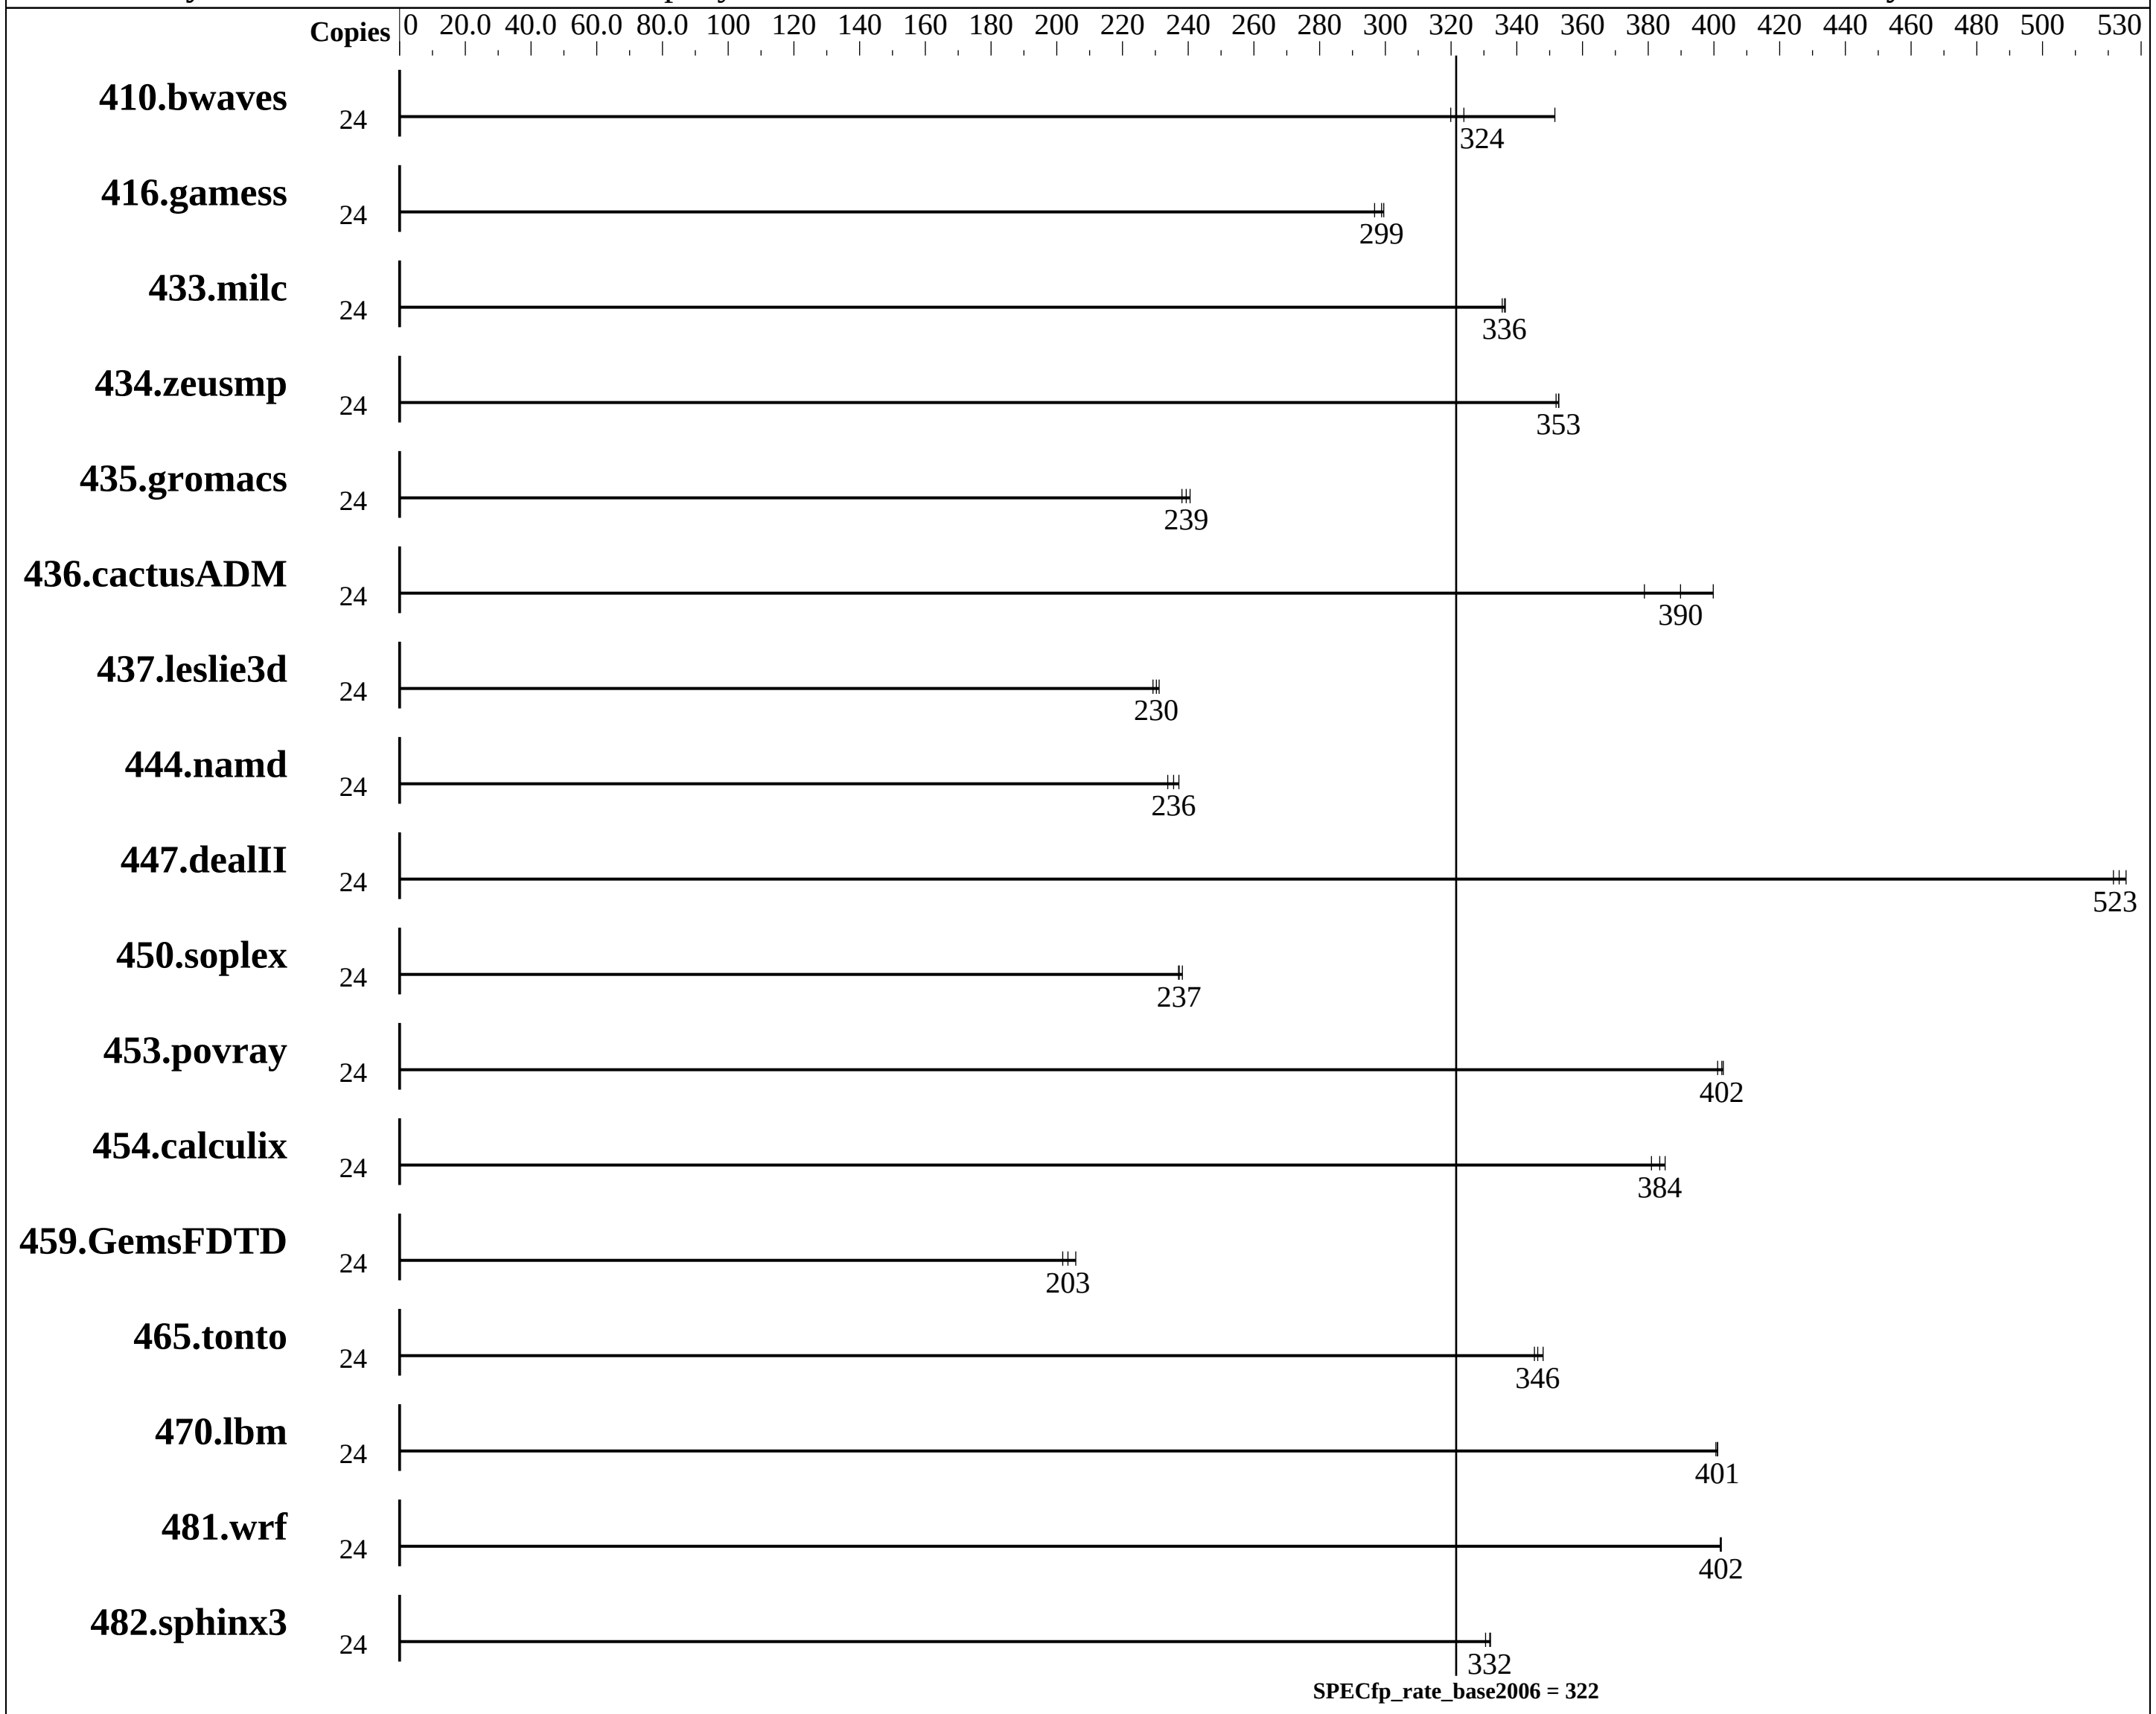

Hardware

CPU Name:	Intel Xeon E5-2620
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, (Santiago) Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

Hewlett-Packard Company

ProLiant ML350p Gen8
(2.00 GHz, Intel Xeon E5-2620)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 322

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company
Test date: Sep-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem: 2 x 300 GB 15 K SAS, RAID 1
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	928	352	**1007**	**324**	1020	320							
416.gamess	24	1569	300	1584	297	**1572**	**299**							
433.milc	24	657	336	655	337	**655**	**336**							
434.zeusmp	24	621	352	**619**	**353**	619	353							
435.gromacs	24	712	241	720	238	**716**	**239**							
436.cactusADM	24	**736**	**390**	717	400	757	379							
437.leslie3d	24	**980**	**230**	976	231	984	229							
444.namd	24	812	237	823	234	**817**	**236**							
447.dealII	24	526	522	523	525	**525**	**523**							
450.soplex	24	840	238	844	237	**844**	**237**							
453.povray	24	317	403	**317**	**402**	318	401							
454.calculix	24	514	385	**516**	**384**	520	381							
459.GemsFDTD	24	1237	206	**1252**	**203**	1262	202							
465.tonto	24	684	345	679	348	**682**	**346**							
470.lbm	24	**822**	**401**	823	401	822	401							
481.wrf	24	667	402	**667**	**402**	667	402							
482.sphinx3	24	**1410**	**332**	1409	332	1415	330							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 >       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --localalloc runspec <etc>
```

Continued on next page

Hewlett-Packard Company

ProLiant ML350p Gen8
(2.00 GHz, Intel Xeon E5-2620)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 322

CPU2006 license: 3 | **Test date:** Sep-2012
Test sponsor: Hewlett-Packard Company | **Hardware Availability:** Jun-2012
Tested by: Hewlett-Packard Company | **Software Availability:** Dec-2011

Operating System Notes (Continued)

```
Drive Write Cache set to Enabled in HP Array Configuration Utility,
 CLI version
Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write
 in HP Array Configuration Utility, CLI version
```

Platform Notes

```
BIOS Configuration:
 HP Power Profile set to Custom
 Thermal Configuration set to Maximum Cooling
 Collaborative Power Control set to Disabled
 Processor Power and Utilization Monitoring set to Disabled

Sysinfo program /cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on ml350pGen8 Sat Sep 22 22:29:13 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
      physical 0: cores 0 1 2 3 4 5
      physical 1: cores 0 1 2 3 4 5
   cache size : 15360 KB

From /proc/meminfo
   MemTotal:       65937904 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux ml350pGen8 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
   x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
run-level 3 Sep 22 15:00

SPEC is set to: /cpu2006
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/sda3      ext4    273G   23G  237G   9% /

Additional information from dmidecode:
  BIOS HP P72 02/21/2012
  Memory:
   8x Not Specified Not Specified 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/cpu2006/libs2/32:/cpu2006/libs2/64"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 13:19:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 December 2012.