



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]2006 = 112

Huawei XH628 V3 (Intel Xeon E5-2690 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

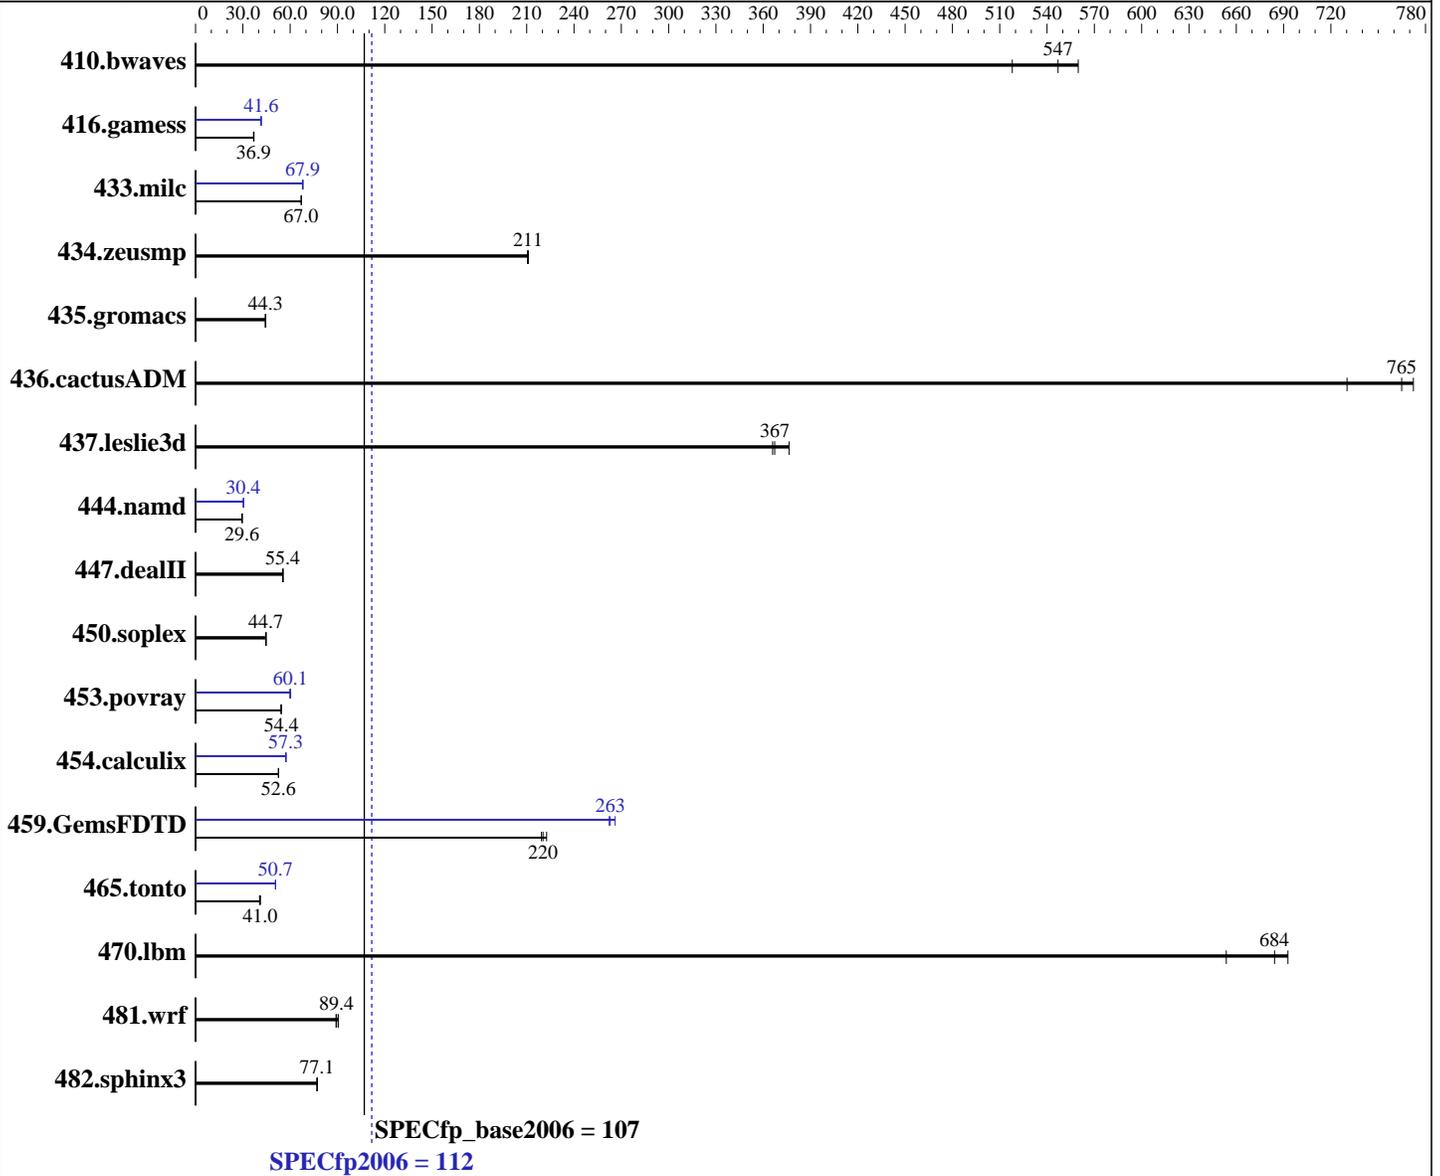

Hardware

CPU Name: Intel Xeon E5-2690 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = **112**

Huawei XH628 V3 (Intel Xeon E5-2690 v3)

SPECfp_base2006 = **107**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	26.2	518	24.3	560	<u>24.8</u>	<u>547</u>	26.2	518	24.3	560	<u>24.8</u>	<u>547</u>
416.gamess	528	37.1	<u>531</u>	<u>36.9</u>	532	36.8	472	41.5	470	41.7	<u>471</u>	<u>41.6</u>
433.milc	<u>137</u>	<u>67.0</u>	137	67.0	137	67.2	<u>135</u>	<u>67.9</u>	135	68.2	135	67.8
434.zeusmp	43.2	210	<u>43.2</u>	<u>211</u>	43.1	211	43.2	210	<u>43.2</u>	<u>211</u>	43.1	211
435.gromacs	161	44.2	160	44.5	<u>161</u>	<u>44.3</u>	161	44.2	160	44.5	<u>161</u>	<u>44.3</u>
436.cactusADM	15.5	772	16.4	730	<u>15.6</u>	<u>765</u>	15.5	772	16.4	730	<u>15.6</u>	<u>765</u>
437.leslie3d	<u>25.6</u>	<u>367</u>	25.7	366	25.0	376	<u>25.6</u>	<u>367</u>	25.7	366	25.0	376
444.namd	<u>271</u>	<u>29.6</u>	271	29.6	272	29.4	<u>264</u>	<u>30.4</u>	264	30.4	264	30.4
447.dealII	<u>206</u>	<u>55.4</u>	207	55.4	206	55.4	<u>206</u>	<u>55.4</u>	207	55.4	206	55.4
450.soplex	187	44.6	187	44.7	<u>187</u>	<u>44.7</u>	187	44.6	187	44.7	<u>187</u>	<u>44.7</u>
453.povray	97.7	54.5	98.3	54.1	<u>97.7</u>	<u>54.4</u>	<u>88.5</u>	<u>60.1</u>	89.0	59.8	88.2	60.3
454.calculix	157	52.7	157	52.6	<u>157</u>	<u>52.6</u>	144	57.3	<u>144</u>	<u>57.3</u>	144	57.3
459.GemsFDTD	<u>48.2</u>	<u>220</u>	47.7	223	48.4	219	39.9	266	<u>40.3</u>	<u>263</u>	40.4	262
465.tonto	243	40.6	<u>240</u>	<u>41.0</u>	240	41.0	194	50.7	194	50.8	<u>194</u>	<u>50.7</u>
470.lbm	<u>20.1</u>	<u>684</u>	21.0	654	19.8	693	<u>20.1</u>	<u>684</u>	21.0	654	19.8	693
481.wrf	123	90.5	125	89.1	<u>125</u>	<u>89.4</u>	123	90.5	125	89.1	<u>125</u>	<u>89.4</u>
482.sphinx3	253	77.0	<u>253</u>	<u>77.1</u>	252	77.2	253	77.0	<u>253</u>	<u>77.1</u>	252	77.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Custom
Set Snoop Mode to HS mode
Set HT to Disable
Sysinfo program /spec15/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Feb 13 03:49:53 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 112

Huawei XH628 V3 (Intel Xeon E5-2690 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2690 v3 @ 2.60GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 12

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

cache size : 30720 KB

From /proc/meminfo

MemTotal: 263720560 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.0 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.0"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57

EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 13 03:47

SPEC is set to: /spec15

Filesystem Type Size Used Avail Use% Mounted on

/dev/sdal ext4 458G 38G 397G 9% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 1.17 09/03/2014

Memory:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 112

Huawei XH628 V3 (Intel Xeon E5-2690 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

8x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz
8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"

OMP_NUM_THREADS = "24"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Huawei XH622 V3 and Huawei XH628 V3

are electronically equivalent.

The results have been measured on a Huawei XH628 V3 model.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -noFOR_main

436.cactusADM: -DSPEC_CPU_LP64 -noFOR_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 112

Huawei XH628 V3 (Intel Xeon E5-2690 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175

Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Base Portability Flags (Continued)

```

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 112

Huawei XH628 V3 (Intel Xeon E5-2690 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 112

Huawei XH628 V3 (Intel Xeon E5-2690 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 10 16:01:50 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 March 2015.