



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8158, 3.00 GHz)

**SPECfp\_rate2006 = 2450**

**SPECfp\_rate\_base2006 = 2410**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

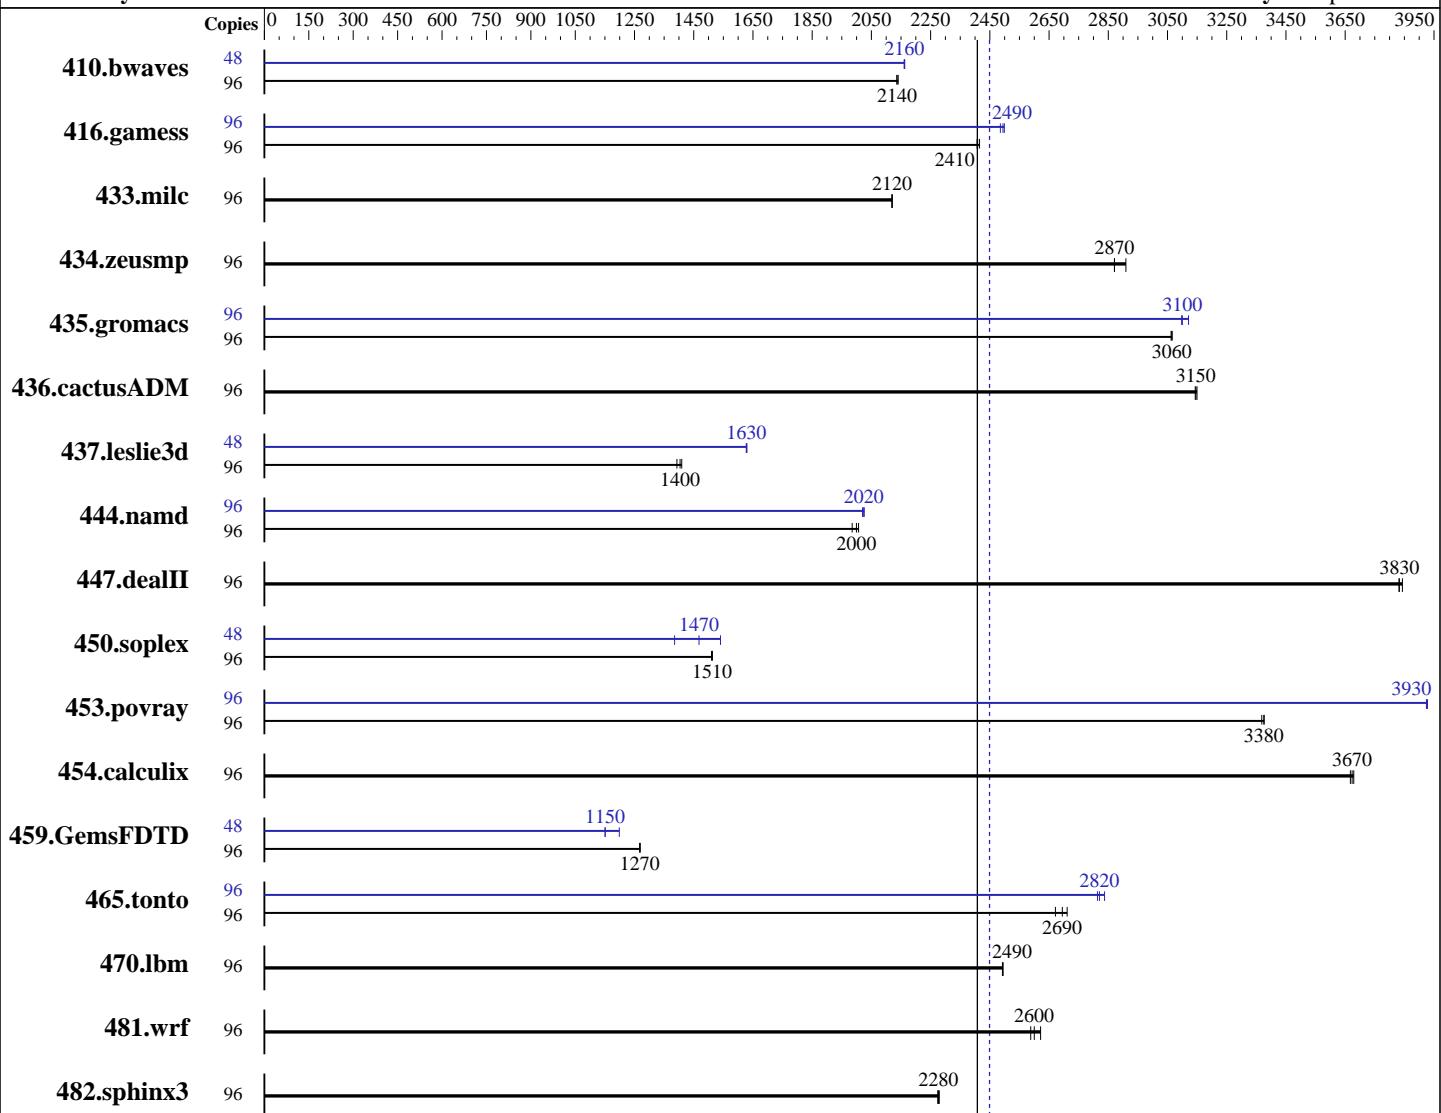

**SPECfp\_rate\_base2006 = 2410**

**SPECfp\_rate2006 = 2450**

## Hardware

CPU Name: Intel Xeon Platinum 8158  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 3000  
FPU: Integrated  
CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2 4.4.21-69-default  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8158, 3.00 GHz)

**SPECfp\_rate2006 = 2450**

**SPECfp\_rate\_base2006 = 2410**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

L3 Cache: 24.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 900 GB 15K RPM SAS12  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	96	610	2140	<b><u>611</u></b>	<b><u>2140</u></b>	611	2140	48	302	2160	302	2160	<b><u>302</u></b>	<b><u>2160</u></b>
416.gamess	96	781	2410	778	2420	<b><u>780</u></b>	<b><u>2410</u></b>	96	752	2500	<b><u>754</u></b>	<b><u>2490</u></b>	756	2490
433.milc	96	416	2120	416	2120	<b><u>416</u></b>	<b><u>2120</u></b>	96	416	2120	416	2120	<b><u>416</u></b>	<b><u>2120</u></b>
434.zeusmp	96	300	2910	<b><u>304</u></b>	<b><u>2870</u></b>	304	2870	96	300	2910	<b><u>304</u></b>	<b><u>2870</u></b>	304	2870
435.gromacs	96	<b><u>224</u></b>	<b><u>3060</u></b>	224	3070	224	3060	96	221	3100	220	3120	<b><u>221</u></b>	<b><u>3100</u></b>
436.cactusADM	96	<b><u>365</u></b>	<b><u>3150</u></b>	364	3150	365	3140	96	<b><u>365</u></b>	<b><u>3150</u></b>	364	3150	365	3140
437.leslie3d	96	648	1390	640	1410	<b><u>643</u></b>	<b><u>1400</u></b>	48	<b><u>277</u></b>	<b><u>1630</u></b>	277	1630	277	1630
444.namd	96	<b><u>385</u></b>	<b><u>2000</u></b>	384	2010	388	1990	96	<b><u>380</u></b>	<b><u>2020</u></b>	380	2030	381	2020
447.dealII	96	<b><u>287</u></b>	<b><u>3830</u></b>	287	3830	286	3840	96	<b><u>287</u></b>	<b><u>3830</u></b>	287	3830	286	3840
450.soplex	96	530	1510	529	1510	<b><u>529</u></b>	<b><u>1510</u></b>	48	260	1540	289	1390	<b><u>273</u></b>	<b><u>1470</u></b>
453.povray	96	152	3370	151	3380	<b><u>151</u></b>	<b><u>3380</u></b>	96	130	3920	<b><u>130</u></b>	<b><u>3930</u></b>	130	3930
454.calculix	96	216	3670	215	3680	<b><u>216</u></b>	<b><u>3670</u></b>	96	216	3670	215	3680	<b><u>216</u></b>	<b><u>3670</u></b>
459.GemsFDTD	96	803	1270	<b><u>803</u></b>	<b><u>1270</u></b>	804	1270	48	443	1150	<b><u>443</u></b>	<b><u>1150</u></b>	425	1200
465.tonto	96	354	2670	<b><u>351</u></b>	<b><u>2690</u></b>	348	2710	96	<b><u>335</u></b>	<b><u>2820</u></b>	333	2840	336	2810
470.lbm	96	529	2490	529	2490	<b><u>529</u></b>	<b><u>2490</u></b>	96	529	2490	529	2490	<b><u>529</u></b>	<b><u>2490</u></b>
481.wrf	96	409	2620	414	2590	<b><u>412</u></b>	<b><u>2600</u></b>	96	409	2620	414	2590	<b><u>412</u></b>	<b><u>2600</u></b>
482.sphinx3	96	<b><u>822</u></b>	<b><u>2280</u></b>	821	2280	823	2270	96	<b><u>822</u></b>	<b><u>2280</u></b>	821	2280	823	2270

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Kernel boot parameter: nohz\_full=1-95  
Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8158, 3.00 GHz)

**SPECfp\_rate2006 = 2450**

**SPECfp\_rate\_base2006 = 2410**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Platform Notes

BIOS settings:  
Logical Processor Enabled  
Virtualization Technology Disabled  
Sub NUMA Cluster Enabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C1E Disabled  
C States set to Autonomous  
Uncore Frequency set to Dynamic  
Memory Patrol Scrub Disabled  
Energy Efficiency Policy set to Performance  
CPU Interconnect Bus Link Power Management Disabled  
PCI ASPM L1 Link Power Management Disabled  
Sysinfo program /home/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-apb2 Sat Oct 14 01:54:15 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz  
 4 "physical id"s (chips)  
 96 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 12  
 siblings : 24  
 physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26  
 physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26  
 physical 2: cores 0 1 2 3 4 9 10 16 18 19 25 26  
 physical 3: cores 0 1 2 3 4 8 10 11 18 24 25 27  
cache size : 25344 kB

From /proc/meminfo  
MemTotal: 791224272 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
SUSE Linux Enterprise Server 12 SP2

From /etc/\*release\* /etc/\*version\*  
SuSE-release:  
 SUSE Linux Enterprise Server 12 (x86\_64)  
VERSION = 12  
PATCHLEVEL = 2  
# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8158, 3.00 GHz)

**SPECfp\_rate2006 = 2450**

**SPECfp\_rate\_base2006 = 2410**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

## Platform Notes (Continued)

```
os-release:  
  NAME="SLES"  
  VERSION="12-SP2"  
  VERSION_ID="12.2"  
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"  
  ID="sles"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:12:sp2"  
  
uname -a:  
  Linux linux-apb2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016  
  (9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 13 17:28
```

```
SPEC is set to: /home/cpu2006  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
 /dev/sda4        xfs   796G   17G   779G   3% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.7 08/10/2017

Memory:

```
17x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz  
7x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz  
24x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8158, 3.00 GHz)

**SPECfp\_rate2006 = 2450**

**SPECfp\_rate\_base2006 = 2410**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Base Compiler Invocation

C benchmarks:  
  `icc -m64`

C++ benchmarks:  
  `icpc -m64`

Fortran benchmarks:  
  `ifort -m64`

Benchmarks using both Fortran and C:  
  `icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
  `433.milc: -DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
  `444.namd: -DSPEC_CPU_LP64`  
  `447.dealII: -DSPEC_CPU_LP64`  
  `450.soplex: -DSPEC_CPU_LP64`  
  `453.povray: -DSPEC_CPU_LP64`  
  `454.calculix: -DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`  
  `465.tonto: -DSPEC_CPU_LP64`  
  `470.lbm: -DSPEC_CPU_LP64`  
  `481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`  
482.sphinx3: `-DSPEC_CPU_LP64`

## Base Optimization Flags

C benchmarks:  
  `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32`  
  `-qopt-mem-layout-trans=3`

C++ benchmarks:  
  `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32`  
  `-qopt-mem-layout-trans=3`

Fortran benchmarks:  
  `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8158, 3.00 GHz)

**SPECfp\_rate2006 = 2450**

**SPECfp\_rate\_base2006 = 2410**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8158, 3.00 GHz)

**SPECfp\_rate2006 = 2450**

**SPECfp\_rate\_base2006 = 2410**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8158, 3.00 GHz)

**SPECfp\_rate2006 = 2450**

**SPECfp\_rate\_base2006 = 2410**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 15 10:58:46 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 November 2017.