



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10


(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 72.0

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

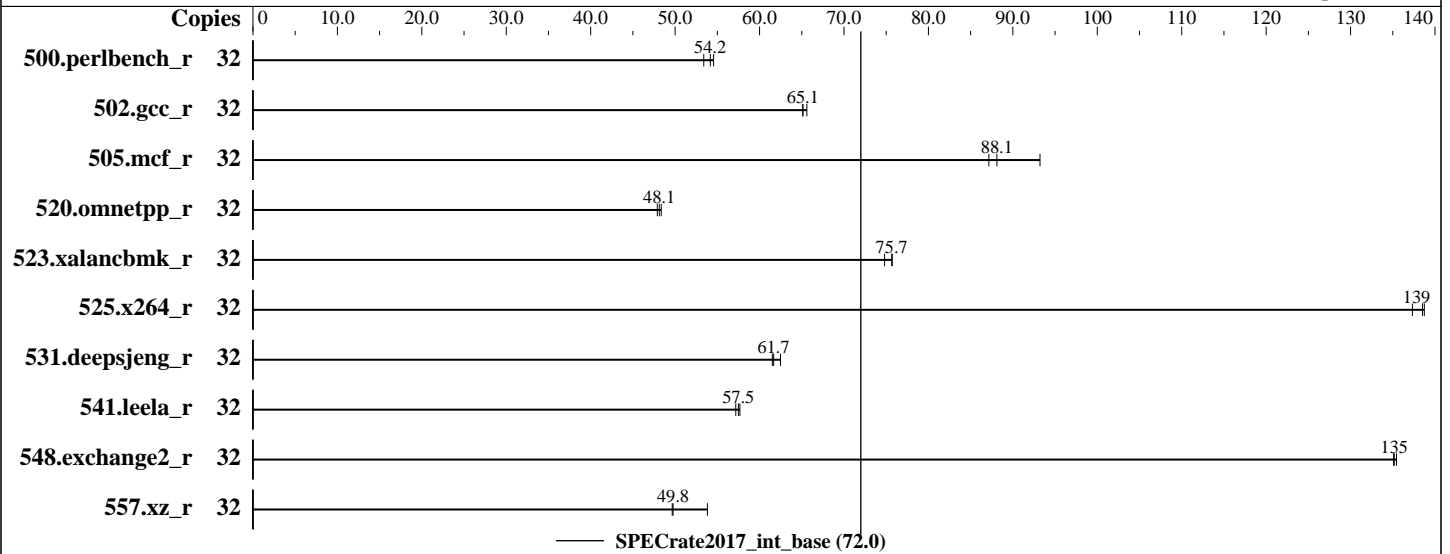

Hardware

CPU Name: Intel Xeon Silver 4110
Max MHz.: 3000
Nominal: 2100
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 11 MB I+D on chip per chip
Other: None
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
Storage: 1 x 480 GB SATA SSD, RAID 0
Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP3
Kernel 4.4.73-5-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: HPE BIOS Version I41 11/14/2017 released Nov-2017
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 72.0

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	954	53.4	934	54.6	940	54.2							
502.gcc_r	32	696	65.1	691	65.6	696	65.1							
505.mcf_r	32	555	93.2	587	88.1	593	87.2							
520.omnetpp_r	32	872	48.1	868	48.4	877	47.9							
523.xalancbmk_r	32	447	75.7	452	74.8	446	75.7							
525.x264_r	32	404	139	405	139	408	137							
531.deepsjeng_r	32	587	62.5	595	61.7	596	61.5							
541.leela_r	32	927	57.2	922	57.5	919	57.7							
548.exchange2_r	32	620	135	621	135	619	135							
557.xz_r	32	642	53.8	695	49.8	696	49.7							

SPECrate2017_int_base = 72.0

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set with "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 72.0

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

General Notes (Continued)

is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.htm>.

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; built with RedHat Enterprise 7.4, and the system compiler gcc 4.8.5; sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C1E State

Workload Profile set to Custom

Sub-NUMA Clustering set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on bl460c107 Fri Dec 15 12:45:44 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz

2 "physical id"s (chips)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 72.0

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Platform Notes (Continued)

32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             2
NUMA node(s):         2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                85
Model name:            Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
Stepping:              4
CPU MHz:               2095.097
BogoMIPS:              4190.19
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              11264K
NUMA node0 CPU(s):    0-7,16-23
NUMA node1 CPU(s):    8-15,24-31
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke
```

```
/proc/cpuinfo cache data
cache size : 11264 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 72.0

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 96350 MB
node 0 free: 95982 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 96765 MB
node 1 free: 96359 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

```

From /proc/meminfo
MemTotal:      197750024 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

```

uname -a:
Linux bl460c107 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
x86_64 x86_64 GNU/Linux

```

run-level 3 Dec 15 12:44

```

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   300G  139G  162G  47% /home

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 72.0

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Platform Notes (Continued)

BIOS HPE I41 11/14/2017

Memory:

4x UNKNOWN NOT AVAILABLE

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 72.0

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.html>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 72.0

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-15 12:45:43-0500.

Report generated on 2018-10-31 18:05:15 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-13.