



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

**SPECrate2017\_fp\_base = 106**

**SPECrate2017\_fp\_peak = 108**

CPU2017 License: 19


Test Date: Mar-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Feb-2018

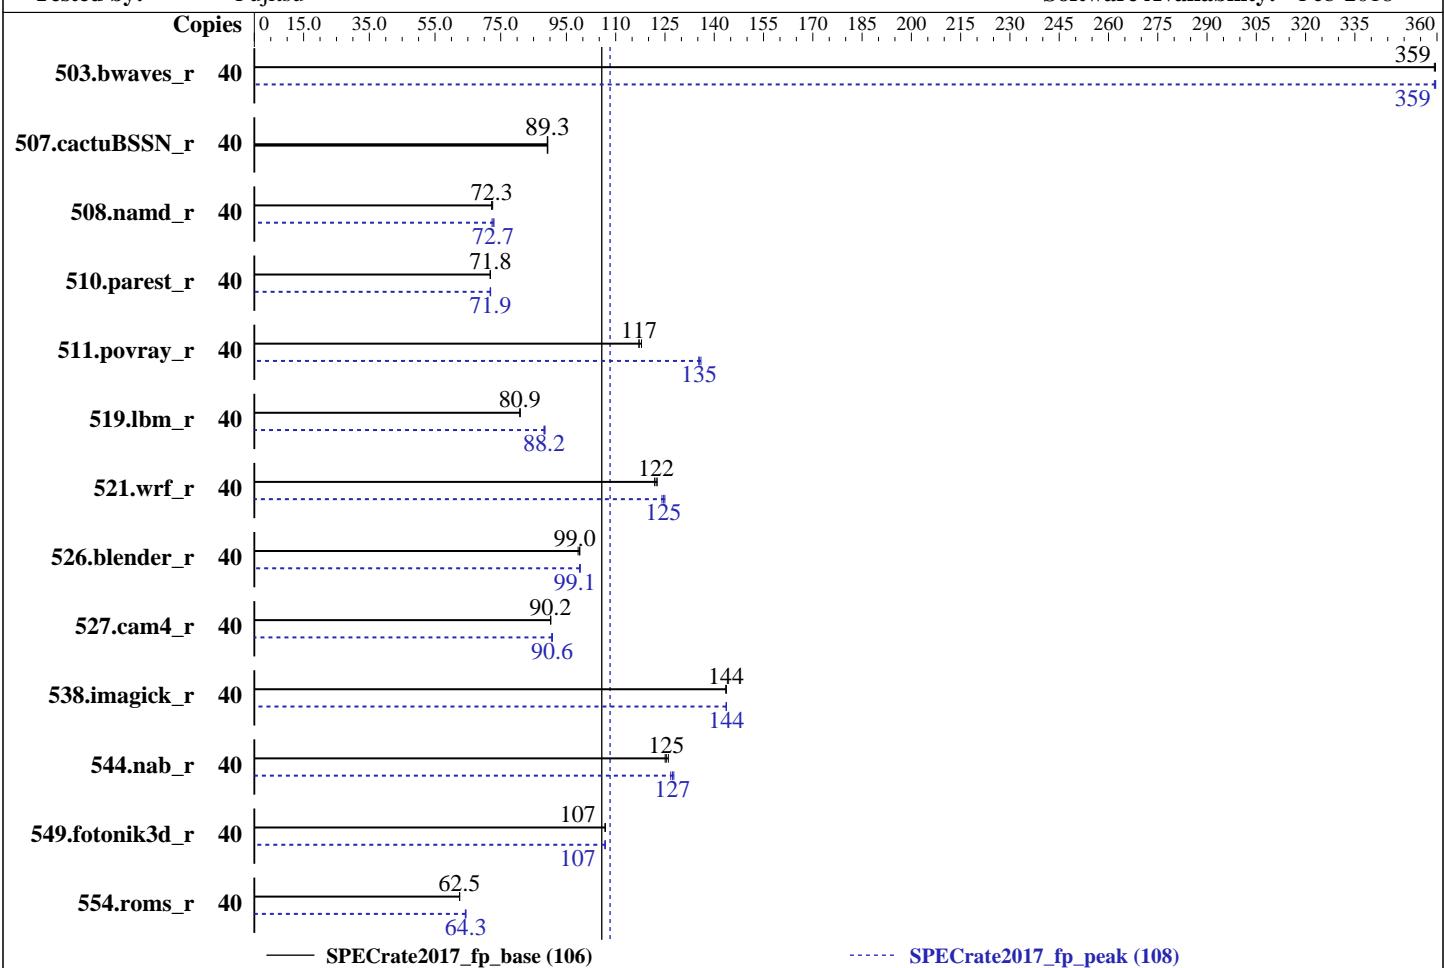

— SPECrate2017\_fp\_base (106)

····· SPECrate2017\_fp\_peak (108)

## Hardware

CPU Name: Intel Xeon Silver 4114  
 Max MHz.: 3000  
 Nominal: 2200  
 Enabled: 20 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 13.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 384 GB tmpfs  
 Other: 1 x SATA HDD, 1000 GB, 7200 RPM, used for swap

## Software

OS: SUSE Linux Enterprise Server 12 SP2  
 4.4.114-92.64-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.12 R1.17.0 for D3384-A1x. Released Feb-2018  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

**SPECrate2017\_fp\_base = 106**

**SPECrate2017\_fp\_peak = 108**

CPU2017 License: 19

Test Date: Mar-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	40	<b>1116</b>	<b>359</b>	1116	360	1117	359	40	<b>1116</b>	<b>359</b>	1117	359	1115	360
507.cactuBSSN_r	40	<b>567</b>	<b>89.3</b>	568	89.2	567	89.3	40	<b>567</b>	<b>89.3</b>	568	89.2	567	89.3
508.namd_r	40	<b>526</b>	<b>72.3</b>	524	72.6	526	72.3	40	<b>521</b>	<b>73.0</b>	<b>523</b>	<b>72.7</b>	525	72.4
510.parest_r	40	1456	71.9	1457	71.8	<b>1457</b>	<b>71.8</b>	40	<b>1456</b>	<b>71.9</b>	1457	71.8	1455	71.9
511.povray_r	40	798	117	<b>798</b>	<b>117</b>	793	118	40	<b>690</b>	<b>135</b>	690	135	687	136
519.lbm_r	40	<b>521</b>	<b>80.9</b>	521	80.9	521	80.9	40	<b>478</b>	<b>88.2</b>	476	88.5	<b>478</b>	<b>88.2</b>
521.wrf_r	40	731	123	<b>733</b>	<b>122</b>	735	122	40	<b>717</b>	<b>125</b>	722	124	<b>719</b>	<b>125</b>
526.blender_r	40	618	98.6	<b>615</b>	<b>99.0</b>	615	99.1	40	<b>615</b>	<b>99.0</b>	614	99.2	<b>615</b>	<b>99.1</b>
527.cam4_r	40	776	90.1	775	90.2	<b>776</b>	<b>90.2</b>	40	<b>771</b>	<b>90.7</b>	<b>772</b>	<b>90.6</b>	773	90.5
538.imagick_r	40	693	144	692	144	<b>693</b>	<b>144</b>	40	692	144	<b>692</b>	<b>144</b>	693	144
544.nab_r	40	<b>537</b>	<b>125</b>	534	126	538	125	40	<b>529</b>	<b>127</b>	527	128	531	127
549.fotonik3d_r	40	<b>1459</b>	<b>107</b>	1460	107	1459	107	40	1461	107	<b>1460</b>	<b>107</b>	1459	107
554.roms_r	40	1018	62.5	<b>1017</b>	<b>62.5</b>	1017	62.5	40	987	64.4	<b>988</b>	<b>64.3</b>	990	64.2

**SPECrate2017\_fp\_base = 106**

**SPECrate2017\_fp\_peak = 108**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter: nohz_full=1-39
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=384g,rw tmpfs /home/memory
Process tuning settings:
cpu idle state set with:
cpupower idle-set -d 1
```

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64"

LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/memory/speccpu/je5.0.1-32:/home/memory/speccpu/je5.0.1-64"

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_fp\_base = 106

SPECrate2017\_fp\_peak = 108

CPU2017 License: 19

Test Date: Mar-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled

Override OS Energy Performance = Enabled

Energy Performance = Performance

Package C State limit = C0

LLC Dead Line Alloc = Disabled

Stale AtoS = Enabled

Sub NUMA Clustering = Disabled

IMC Interleaving = 2-way

Fan Control = Full

Sysinfo program /home/memory/speccpu/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-RX2540M4 Mon Mar 26 22:02:03 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz

2 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_fp\_base = 106

SPECrate2017\_fp\_peak = 108

CPU2017 License: 19

Test Date: Mar-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## Platform Notes (Continued)

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                40
On-line CPU(s) list:   0-39
Thread(s) per core:    2
Core(s) per socket:    10
Socket(s):              2
NUMA node(s):           2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
Stepping:               4
CPU MHz:                2665.977
CPU max MHz:            3000.0000
CPU min MHz:            800.0000
BogoMIPS:               4389.67
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                14080K
NUMA node0 CPU(s):      0-9,20-29
NUMA node1 CPU(s):      10-19,30-39
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl retpoline
kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm cqmq mpq avx512f avx512dq rdseed adx smap clflushopt clwb
avx512cd avx512bw avx512vl xsaveopt xgetbv1 cqmq_llc cqmq_occrap_llc
```

```
/proc/cpuinfo cache data
cache size : 14080 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
node 0 size: 191784 MB
node 0 free: 182274 MB
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_fp\_base = 106

SPECrate2017\_fp\_peak = 108

CPU2017 License: 19

Test Date: Mar-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## Platform Notes (Continued)

```
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
node 1 size: 193383 MB
node 1 free: 192959 MB
node distances:
node   0   1
 0: 10 21
 1: 21 10

From /proc/meminfo
MemTotal:      394412036 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-RX2540M4 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018
(c6ce5db) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 26 10:46

SPEC is set to: /home/memory/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  384G   8.9G  376G    3% /home/memory

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.17.0 for D3384-A1x
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_fp\_base = 106

SPECrate2017\_fp\_peak = 108

CPU2017 License: 19

Test Date: Mar-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## Platform Notes (Continued)

02/08/2018

Memory:

24x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 519.lbm_r(peak) 544.nab_r(peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 511.povray_r(base) 526.blender_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_fp\_base = 106

SPECrate2017\_fp\_peak = 108

CPU2017 License: 19

Test Date: Mar-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## Compiler Version Notes (Continued)

CC 511.povray\_r(peak) 526.blender\_r(peak)

```
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

FC 507.cactubSSN\_r(base)

```
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

FC 507.cactubSSN\_r(peak)

```
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

```
-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

FC 554.roms\_r(peak)

```
-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_fp\_base = 106

SPECrate2017\_fp\_peak = 108

CPU2017 License: 19

Test Date: Mar-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.0 20170811
```

```
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
icc (ICC) 18.0.0 20170811
```

```
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
```

```
CC 521.wrf_r(peak) 527.cam4_r(peak)
```

```
=====
```

```
ifort (IFORT) 18.0.0 20170811
```

```
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
icc (ICC) 18.0.0 20170811
```

```
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using both C and C++:

```
icpc icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactusBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_fp\_base = 106

SPECrate2017\_fp\_peak = 108

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

## Base Portability Flags (Continued)

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_fp\_base = 106

SPECrate2017\_fp\_peak = 108

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

## Base Other Flags (Continued)

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_fp\_base = 106

SPECrate2017\_fp\_peak = 108

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

## Peak Optimization Flags (Continued)

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

507.cactusBSSN\_r: basepeak = yes



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_fp\_base = 106

SPECrate2017\_fp\_peak = 108

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-03-26 22:02:02-0400.

Report generated on 2018-10-31 17:47:36 by CPU2017 PDF formatter v6067.

Originally published on 2018-04-17.