



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

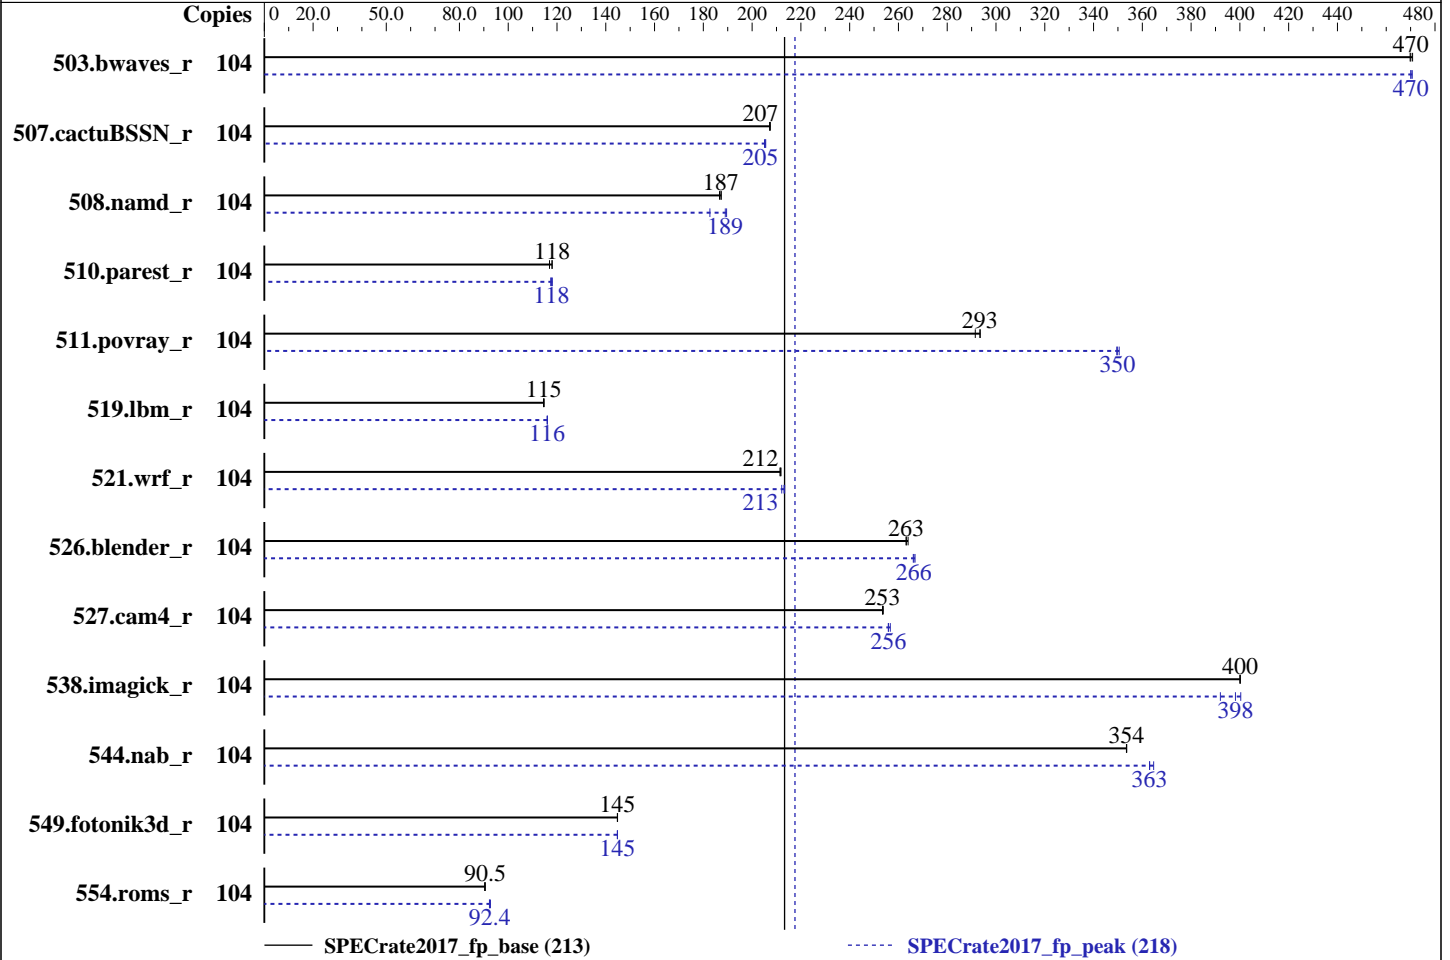

Hardware

CPU Name: Intel Xeon Platinum 8170M
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 52 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 800 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.114-92.64-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version TEE121Q 1.30 released Feb-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	104	2215	471	2220	470	<u>2219</u>	<u>470</u>	104	2219	470	<u>2218</u>	<u>470</u>	2216	471
507.cactuBSSN_r	104	635	207	<u>635</u>	<u>207</u>	635	207	104	642	205	640	206	<u>641</u>	<u>205</u>
508.namd_r	104	529	187	527	187	<u>528</u>	<u>187</u>	104	541	183	<u>523</u>	<u>189</u>	521	190
510.parest_r	104	2327	117	<u>2306</u>	<u>118</u>	2305	118	104	2317	117	<u>2311</u>	<u>118</u>	2304	118
511.povray_r	104	<u>828</u>	<u>293</u>	827	294	833	292	104	<u>694</u>	<u>350</u>	693	351	695	350
519.lbm_r	104	<u>957</u>	<u>115</u>	957	114	956	115	104	<u>945</u>	<u>116</u>	945	116	945	116
521.wrf_r	104	<u>1101</u>	<u>212</u>	1102	211	1100	212	104	1098	212	1092	213	<u>1093</u>	<u>213</u>
526.blender_r	104	600	264	602	263	<u>602</u>	<u>263</u>	104	<u>595</u>	<u>266</u>	594	267	595	266
527.cam4_r	104	<u>718</u>	<u>253</u>	718	253	717	254	104	<u>711</u>	<u>256</u>	709	257	711	256
538.imagick_r	104	646	400	647	400	<u>646</u>	<u>400</u>	104	646	400	<u>650</u>	<u>398</u>	660	392
544.nab_r	104	495	353	495	354	<u>495</u>	<u>354</u>	104	<u>482</u>	<u>363</u>	480	365	482	363
549.fotonik3d_r	104	2798	145	2800	145	<u>2799</u>	<u>145</u>	104	2800	145	<u>2799</u>	<u>145</u>	2799	145
554.roms_r	104	1825	90.6	<u>1825</u>	<u>90.5</u>	1829	90.3	104	1782	92.7	<u>1788</u>	<u>92.4</u>	1790	92.3

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

Hardware Prefetcher set to Disable

MONITOR/MWAIT set to Enable

Execute Disable Bit set to Disable

Intel Virtualization Technology set to Disable

DCA set to Enable

 Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

 running on stark-02-02 Sat Jan 1 02:38:46 2000

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

 model name : Intel(R) Xeon(R) Platinum 8170M CPU @ 2.10GHz

 2 "physical id"s (chips)

 104 "processors"

 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

 cpu cores : 26

 siblings : 52

 physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

 physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:

 Architecture: x86_64

 CPU op-mode(s): 32-bit, 64-bit

 Byte Order: Little Endian

 CPU(s): 104

 On-line CPU(s) list: 0-103

 Thread(s) per core: 2

 Core(s) per socket: 26

 Socket(s): 2

 NUMA node(s): 4

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 213

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_peak = 218

CPU2017 License: 9017

Test Date: Mar-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Platinum 8170M CPU @ 2.10GHz
Stepping:           4
CPU MHz:            2095.083
BogoMIPS:           4190.16
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,20-22,52-55,59-61,65-67,72-74
NUMA node1 CPU(s): 4-6,10-12,16-19,23-25,56-58,62-64,68-71,75-77
NUMA node2 CPU(s): 26-29,33-35,39-41,46-48,78-81,85-87,91-93,98-100
NUMA node3 CPU(s): 30-32,36-38,42-45,49-51,82-84,88-90,94-97,101-103
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 52 53 54 55 59 60 61 65 66 67 72 73 74
node 0 size: 96356 MB
node 0 free: 96103 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 56 57 58 62 63 64 68 69 70 71 75 76 77
node 1 size: 96753 MB
node 1 free: 96491 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 78 79 80 81 85 86 87 91 92 93 98 99
100
node 2 size: 96753 MB
node 2 free: 96507 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 82 83 84 88 89 90 94 95 96 97 101
102 103
node 3 size: 96750 MB
node 3 free: 96396 MB

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

node distances:

node	0	1	2	3
0:	10	11	21	21
1:	11	10	21	21
2:	21	21	10	11
3:	21	21	11	10

From /proc/meminfo

MemTotal: 395892188 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux stark-02-02 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 1 02:21

SPEC is set to: /home/cpu2017.1.0.2.ic18.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	689G	113G	577G	17%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE121Q-1.30]- 02/07/2018

Memory:

4x NO DIMM NO DIMM
12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 519.lbm_r(peak) 544.nab_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)
=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 213

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_peak = 218

CPU2017 License: 9017

Test Date: Mar-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Base Portability Flags (Continued)

544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using both C and C++:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`

Peak Compiler Invocation

C benchmarks:

`icc`

C++ benchmarks:

`icpc`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`ifort icc`

Benchmarks using both C and C++:

`icpc icc`

Benchmarks using Fortran, C, and C++:

`icpc icc ifort`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3`

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nonstandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nonstandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nonstandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nonstandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017_fp_base = 213

SPECrate2017_fp_peak = 218

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 1999-12-31 13:38:45-0500.

Report generated on 2018-10-31 17:28:17 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.