



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 55.1

Huawei 5288 V5 (Intel Xeon Bronze 3204)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

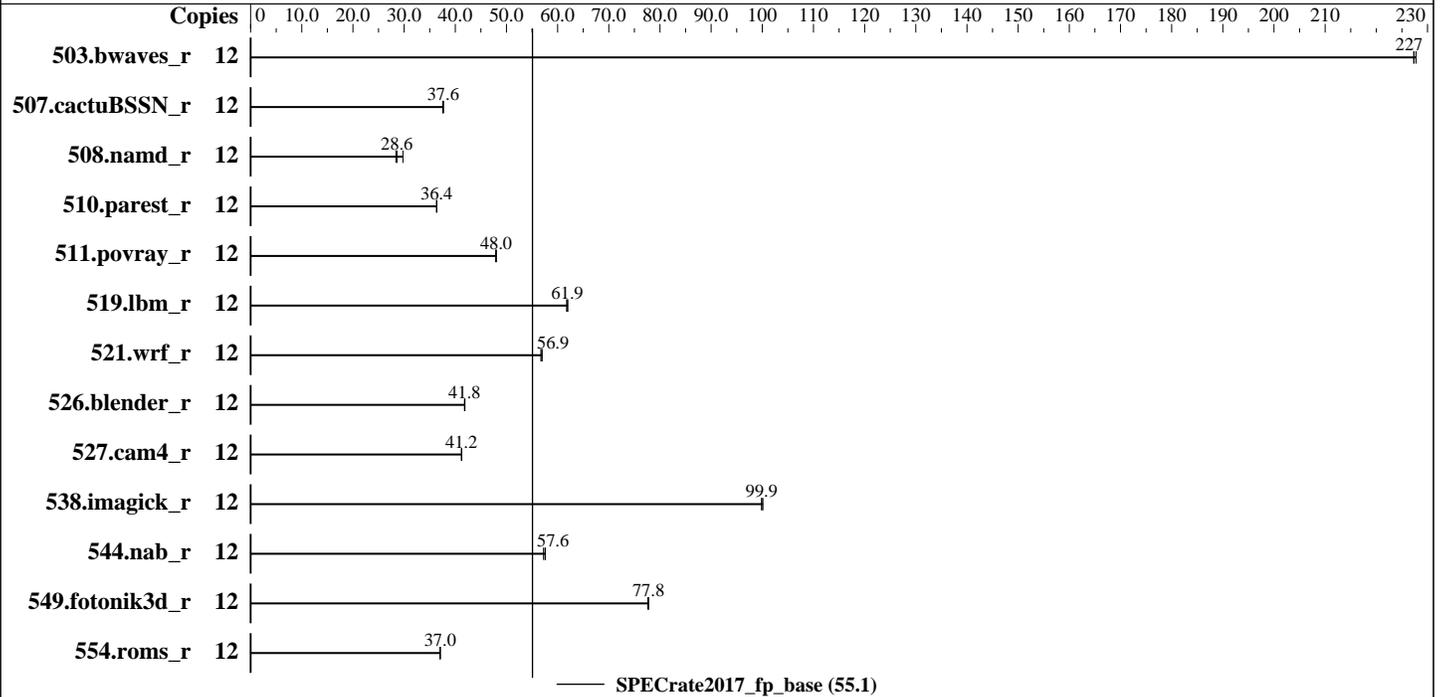

Hardware

CPU Name: Intel Xeon Bronze 3204
 Max MHz.: 1900
 Nominal: 1900
 Enabled: 12 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 8.25 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R, running at 2133)
 Storage: 1 x 1200 GB SAS, 10000 RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64) 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
 Parallel: No
 Firmware: Version 6.52 Released Mar-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 55.1

Huawei 5288 V5 (Intel Xeon Bronze 3204)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	12	528	228	529	227	529	227							
507.cactuBSSN_r	12	405	37.6	404	37.6	403	37.7							
508.namd_r	12	402	28.4	399	28.6	383	29.8							
510.parest_r	12	863	36.4	863	36.4	863	36.4							
511.povray_r	12	584	48.0	584	48.0	585	47.9							
519.lbm_r	12	204	62.0	205	61.8	204	61.9							
521.wrf_r	12	474	56.7	472	57.0	472	56.9							
526.blender_r	12	437	41.8	436	41.9	437	41.8							
527.cam4_r	12	509	41.2	509	41.2	509	41.2							
538.imagick_r	12	298	100	299	99.9	299	99.9							
544.nab_r	12	351	57.6	351	57.6	353	57.2							
549.fotonik3d_r	12	601	77.8	601	77.8	602	77.6							
554.roms_r	12	515	37.0	515	37.0	515	37.0							

SPECrate2017_fp_base = 55.1

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 55.1

Huawei 5288 V5 (Intel Xeon Bronze 3204)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Power Policy Set to Performance
XPT Prefetch Set to Enabled
Sysinfo program /spec2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on sles12sp4 Wed Mar 27 00:59:29 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Bronze 3204 CPU @ 1.90GHz
 2 "physical id"s (chips)
 12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 6
  siblings      : 6
 physical 0:    cores 0 1 2 3 4 5
 physical 1:    cores 0 1 2 3 4 5
```

```
From lscpu:
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          12
On-line CPU(s) list:  0-11
Thread(s) per core:  1
Core(s) per socket:  6
Socket(s):       2
NUMA node(s):    2
Vendor ID:       GenuineIntel
CPU family:      6
Model:           85
Model name:      Intel(R) Xeon(R) Bronze 3204 CPU @ 1.90GHz
Stepping:        6
CPU MHz:         1900.000
CPU max MHz:     1900.0000
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 55.1

Huawei 5288 V5 (Intel Xeon Bronze 3204)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Platform Notes (Continued)

CPU min MHz: 800.0000
BogoMIPS: 3800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 8448K
NUMA node0 CPU(s): 0-5
NUMA node1 CPU(s): 6-11

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```
/proc/cpuinfo cache data
cache size : 8448 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 191935 MB
node 0 free: 190610 MB
node 1 cpus: 6 7 8 9 10 11
node 1 size: 193253 MB
node 1 free: 191996 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10
```

```
From /proc/meminfo
MemTotal: 394433036 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 55.1

Huawei 5288 V5 (Intel Xeon Bronze 3204)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Platform Notes (Continued)

```

PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux sles12sp4 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Mar 26 11:46

SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   700G   15G  686G   3% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS INSYDE Corp. 6.52 03/16/2019
Memory:
24x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933, configured at 2133

(End of data from sysinfo program)

```

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 55.1

Huawei 5288 V5 (Intel Xeon Bronze 3204)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)
=====

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 55.1

Huawei 5288 V5 (Intel Xeon Bronze 3204)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

`icc -m64 -std=c11`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:

`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 55.1

Huawei 5288 V5 (Intel Xeon Bronze 3204)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-27 00:59:28-0400.

Report generated on 2019-05-15 13:29:28 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.