



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate2017_int_base = 216

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

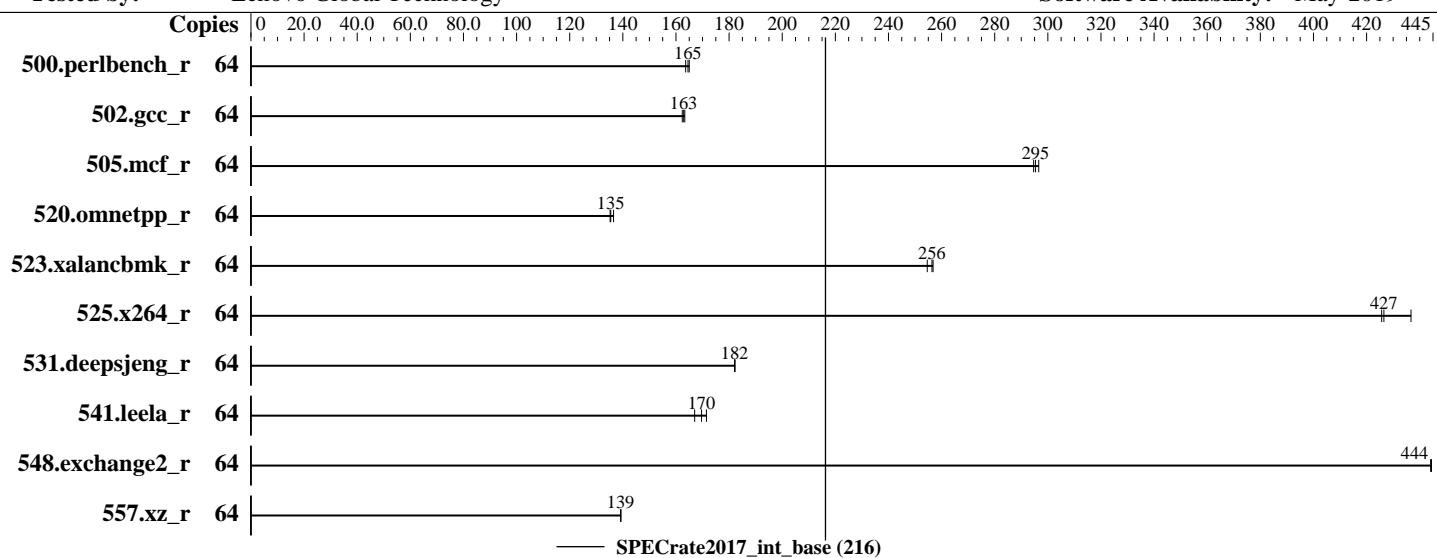

Hardware

CPU Name: Intel Xeon Gold 5217
Max MHz.: 3700
Nominal: 3000
Enabled: 32 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 11 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
Storage: 800 GB tmpfs
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
Compiler: Kernel 4.12.14-94.41-default
C/C++: Version 19.0.4.227 of Intel
C/C++ Compiler for Linux;
Fortran: Version 19.0.4.227 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Lenovo BIOS Version TEE142E 2.30 released Aug-2019 tested as TEE135T 2.10 Mar-2019
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate2017_int_base = 216

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	619	165	617	165	623	164									
502.gcc_r	64	558	162	556	163	555	163									
505.mcf_r	64	350	295	351	295	349	297									
520.omnetpp_r	64	620	135	615	136	621	135									
523.xalancbmk_r	64	263	257	265	255	264	256									
525.x264_r	64	263	427	257	437	263	426									
531.deepsjeng_r	64	403	182	402	182	403	182									
541.leela_r	64	625	170	618	171	634	167									
548.exchange2_r	64	377	444	377	444	378	444									
557.xz_r	64	496	139	497	139	497	139									

SPECrate2017_int_base = 216

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tmpfs filesystem can be set with:

```
mount -t tmpfs -o size=800g tmpfs /home
```

Process tuning setting:

```
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate2017_int_base = 216

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

DCU Streamer Prefetcher set to Disable

```
Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-700n Mon Jul 15 09:22:48 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5217 CPU @ 3.00GHz
        4 "physical id"s (chips)
        64 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings   : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               64
On-line CPU(s) list: 0-63
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate2017_int_base = 216

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5217 CPU @ 3.00GHz
Stepping: 6
CPU MHz: 3000.000
CPU max MHz: 3700.0000
CPU min MHz: 1200.0000
BogoMIPS: 6000.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 11264K
NUMA node0 CPU(s): 0-7,32-39
NUMA node1 CPU(s): 8-15,40-47
NUMA node2 CPU(s): 16-23,48-55
NUMA node3 CPU(s): 24-31,56-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vrmi flexpriority ept vpid fsgsbase tsc_adjust bmil
hle avx2 smep bmi2 erms invpcid rtm cqmm ppx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqmm_llc cqmm_occup_llc cqmm_mbmm_total cqmm_mbmm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 11264 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
node 0 size: 386641 MB
node 0 free: 386170 MB
node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
node 1 size: 387058 MB
node 1 free: 374132 MB
node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate2017_int_base = 216

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

```
node 2 size: 387058 MB
node 2 free: 386789 MB
node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
node 3 size: 387055 MB
node 3 free: 386811 MB
node distances:
node   0   1   2   3
  0: 10 21 21 31
  1: 21 10 31 21
  2: 21 31 10 21
  3: 31 21 21 10

From /proc/meminfo
MemTotal:           1584962172 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux linux-700n 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Jul 15 09:19

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate2017_int_base = 216

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	800G	8.3G	792G	2%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE135T-2.10]- 03/21/2019

Memory:

48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

FC 548.exchange2_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate2017_int_base = 216

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate2017_int_base = 216

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-07-14 21:22:47-0400.

Report generated on 2019-08-21 12:07:47 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-20.