



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.30 GHz, Intel Xeon Gold 6252N)

SPECrate®2017_fp_base = 242

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Jul-2019

Software Availability: May-2019

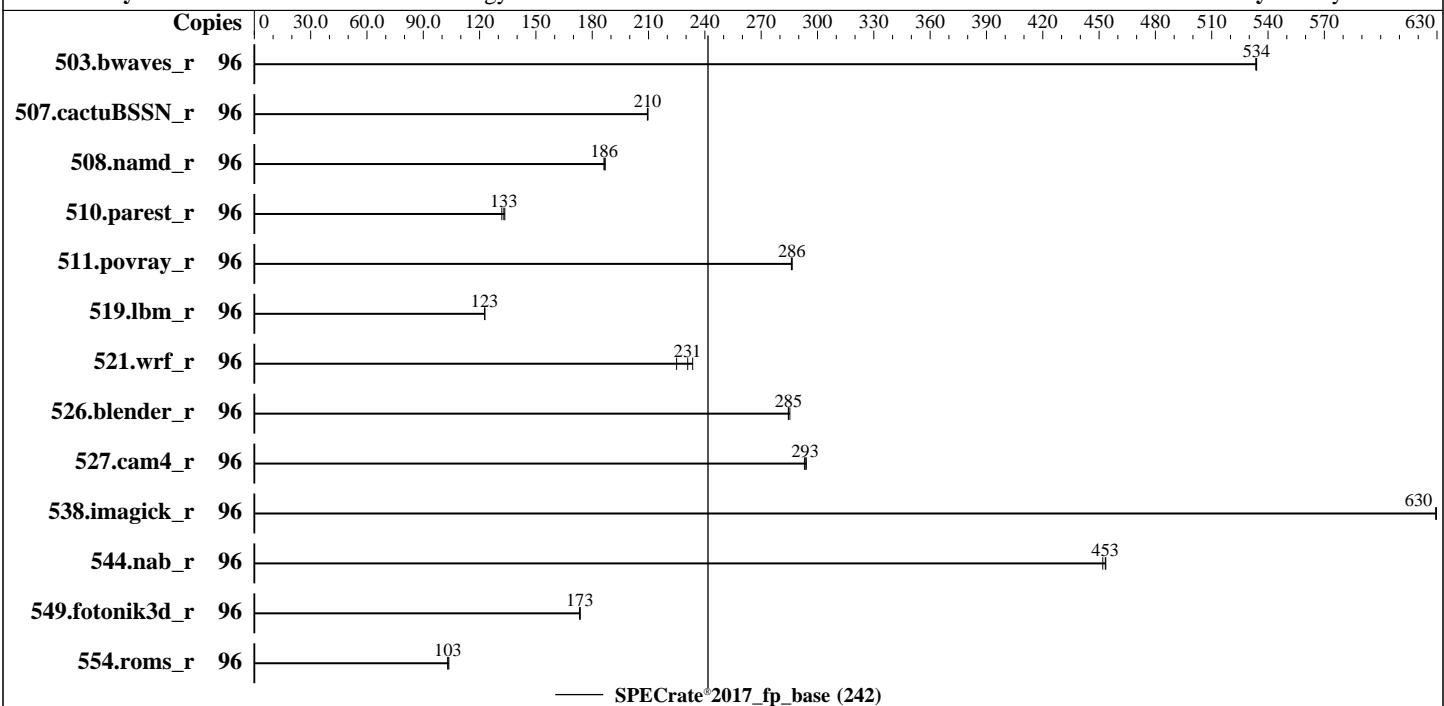

Hardware

CPU Name: Intel Xeon Gold 6252N
Max MHz: 3600
Nominal: 2300
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 35.75 MB I+D on chip per chip
Other: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage: 1 x 800 GB SATA SSD
Other: None

OS:

Red Hat Enterprise Linux Server release 7.6 (Maipo)

Kernel 3.10.0-957.el7.x86_64

Compiler:

C/C++: Version 19.0.4.227 of Intel

C/C++

Compiler for Linux;

Fortran: Version 19.0.4.227 of

Intel Fortran

Compiler for Linux

No

Lenovo BIOS Version IVE142E 2.30 released Aug-2019 tested as IVE141E 2.30 Jul-2019

Firmware:

xfs

Run level 3 (multi-user)

64-bit

Not Applicable

None

File System:

--

System State:

Base Pointers:

Peak Pointers:

Other:

Power Management:

Software



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.30 GHz, Intel Xeon Gold 6252N)

SPECrate®2017_fp_base = 242

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1805	533	1803	534	1803	534									
507.cactusBSSN_r	96	580	210	580	210	580	209									
508.namd_r	96	488	187	489	186	489	186									
510.parest_r	96	1905	132	1882	133	1890	133									
511.povray_r	96	783	286	783	286	784	286									
519.lbm_r	96	824	123	824	123	825	123									
521.wrf_r	96	931	231	956	225	921	234									
526.blender_r	96	514	285	512	285	514	284									
527.cam4_r	96	573	293	571	294	572	293									
538.imagick_r	96	379	630	379	629	379	630									
544.nab_r	96	356	453	357	452	356	454									
549.fotonik3d_r	96	2155	174	2157	173	2159	173									
554.roms_r	96	1481	103	1478	103	1472	104									

SPECrate®2017_fp_base = 242

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.30 GHz, Intel Xeon Gold 6252N)

SPECrate®2017_fp_base = 242

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Choose Operating Mode set to Custom Mode

C-States set to Legacy

SNC set to Enable

DCU Streamer Prefetcher set to Disable

Trusted Execution Technology set to Enable

Stale AtoS set to Enable

LLC dead line alloc set to Disable

Patrol Scrub set to Disable

Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on localhost.localdomain Fri Sep 13 04:57:20 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6252N CPU @ 2.30GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.30 GHz, Intel Xeon Gold 6252N)

SPECrate®2017_fp_base = 242

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

On-line CPU(s) list: 0-95
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6252N CPU @ 2.30GHz
Stepping: 7
CPU MHz: 2300.000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,19,20,48-51,55-57,61-63,67,68
NUMA node1 CPU(s): 4-6,10-12,16-18,21-23,52-54,58-60,64-66,69-71
NUMA node2 CPU(s): 24-27,31-33,37-39,43,44,72-75,79-81,85-87,91,92
NUMA node3 CPU(s): 28-30,34-36,40-42,45-47,76-78,82-84,88-90,93-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni spec_ctrl intel_stibp flush_lld arch_capabilities

/proc/cpuinfo cache data
cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 48 49 50 51 55 56 57 61 62 63 67 68
node 0 size: 196280 MB
node 0 free: 191373 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 52 53 54 58 59 60 64 65 66 69 70 71
node 1 size: 196608 MB
node 1 free: 191452 MB
node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 72 73 74 75 79 80 81 85 86 87 91 92
node 2 size: 196608 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.30 GHz, Intel Xeon Gold 6252N)

SPECrate®2017_fp_base = 242

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

```
node 2 free: 191940 MB
node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 76 77 78 82 83 84 88 89 90 93 94 95
node 3 size: 196608 MB
node 3 free: 191901 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:      792239644 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.6 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.6"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS

run-level 3 Sep 12 18:04

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2        xfs   689G   36G  653G   6% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.30 GHz, Intel Xeon Gold 6252N)

SPECrate®2017_fp_base = 242

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE141E-2.30]- 07/02/2019

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd_r(base) 510.parest_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(base) 526.blender_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactusBSSN_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.30 GHz, Intel Xeon Gold 6252N)

SPECrate®2017_fp_base = 242

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.30 GHz, Intel Xeon Gold 6252N)

SPECrate®2017_fp_base = 242

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Jul-2019

Software Availability: May-2019

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.30 GHz, Intel Xeon Gold 6252N)

SPECrate®2017_fp_base = 242

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-12 16:57:19-0400.

Report generated on 2019-10-01 14:20:41 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.