



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017\_int\_base = 9.93

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

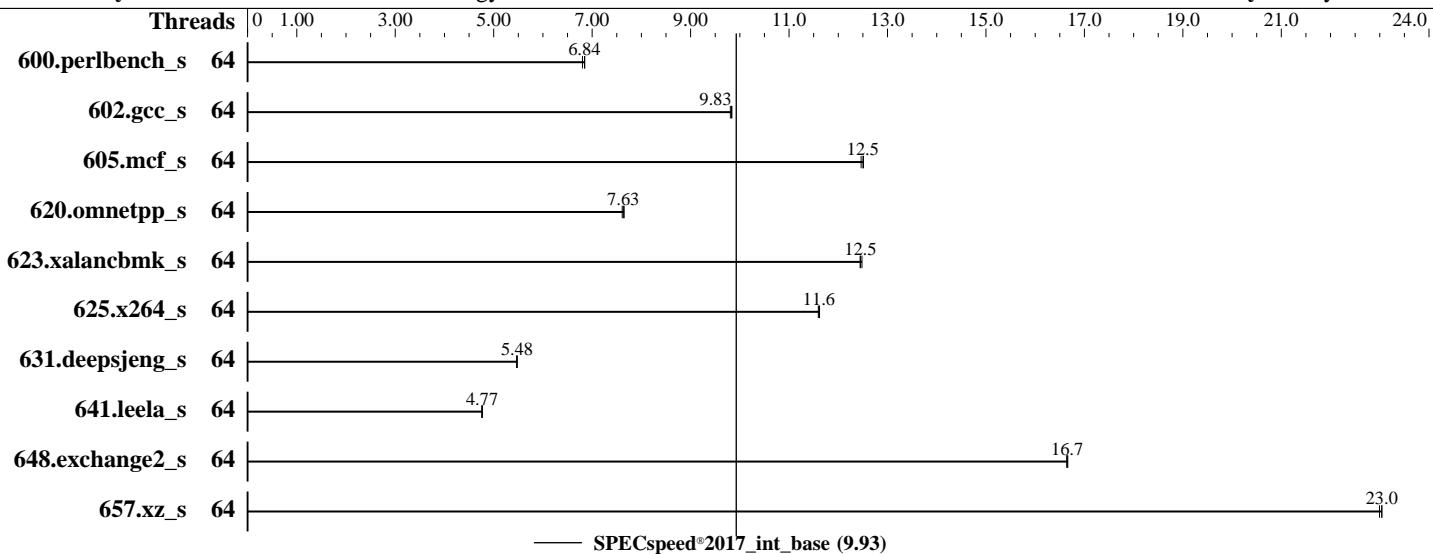

### Hardware

CPU Name: Intel Xeon Gold 5218B  
Max MHz: 3900  
Nominal: 2300  
Enabled: 32 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 22 MB I+D on chip per chip  
Other: None  
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R, running at 2666)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
Compiler: Kernel 4.12.14-94.41-default  
C/C++: Version 19.0.4.227 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 19.0.4.227 of Intel Fortran  
Compiler for Linux  
Parallel: Yes  
Firmware: Lenovo BIOS Version TEE142E 2.30 released Aug-2019 tested as TEE141E 2.30 Jul-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: Disable



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017\_int\_base = 9.93

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	261	6.80	259	6.85	<b>259</b>	<b>6.84</b>							
602.gcc_s	64	405	9.84	<b>405</b>	<b>9.83</b>	406	9.81							
605.mcf_s	64	379	12.5	<b>378</b>	<b>12.5</b>	377	12.5							
620.omnetpp_s	64	214	7.61	<b>214</b>	<b>7.63</b>	213	7.65							
623.xalancbmk_s	64	114	12.5	114	12.4	<b>114</b>	<b>12.5</b>							
625.x264_s	64	152	11.6	<b>152</b>	<b>11.6</b>	152	11.6							
631.deepsjeng_s	64	262	5.48	<b>262</b>	<b>5.48</b>	262	5.47							
641.leela_s	64	<b>358</b>	<b>4.77</b>	359	4.76	358	4.77							
648.exchange2_s	64	177	16.6	176	16.7	<b>177</b>	<b>16.7</b>							
657.xz_s	64	268	23.0	<b>268</b>	<b>23.0</b>	269	23.0							

SPECspeed®2017\_int\_base = 9.93

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH =

"/home/cpu2017-1.1.0-ic19.0u4/lib/intel64:/home/cpu2017-1.1.0-ic19.0u4/j  
e5.0.1-64"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017\_int\_base = 9.93

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

### General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
Memory Power Management set to Automatic  
CPU P-state Control set to Cooperative  
MONITOR/MWAIT set to Enable  
LLC dead line alloc set to Disable

Sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on linux-zitb Tue Nov 5 01:44:08 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz  
2 "physical id"s (chips)  
64 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 16  
siblings : 32  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
CPU(s):	64
On-line CPU(s) list:	0-63
Thread(s) per core:	2
Core(s) per socket:	16
Socket(s):	2
NUMA node(s):	2
Vendor ID:	GenuineIntel

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017\_int\_base = 9.93

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Platform Notes (Continued)

CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz  
Stepping: 6  
CPU MHz: 2300.000  
CPU max MHz: 3900.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4600.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 22528K  
NUMA node0 CPU(s): 0-15,32-47  
NUMA node1 CPU(s): 16-31,48-63  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 cdp\_l3 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke avx512\_vnni flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 22528 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47  
node 0 size: 96344 MB  
node 0 free: 95733 MB  
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63  
node 1 size: 96709 MB  
node 1 free: 96186 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017\_int\_base = 9.93

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Platform Notes (Continued)

```
From /proc/meminfo
MemTotal:       197687232 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 4
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP4"
    VERSION_ID="12.4"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-zitb 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Nov 5 01:40

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   892G   76G  816G   9%  /
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Lenovo -[TEE141E-2.30]- 07/02/2019
Vendor:    Lenovo
Product:   ThinkSystem SR530 -[7X07RCZ000]-
Product Family: ThinkSystem
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017\_int\_base = 9.93

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Platform Notes (Continued)

Serial: 1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x SK Hynix HMA82GR7CJR8N-WM 16 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

The marketing name for the processor in this result, which appears in the CPU name and hardware model areas, is different from sysinfo because a pre-production processor was used. The pre-production processor differs from the production processor in name only.

## Compiler Version Notes

=====

C | 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base)  
| 625.x264\_s(base) 657.xz\_s(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C++ | 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
| 641.leela\_s(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

Fortran | 648.exchange2\_s(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017\_int\_base = 9.93

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

602.gcc\_s: -DSPEC\_LP64

605.mcf\_s: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

```
-L/usr/local/jet5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-nostandard-realloc-lhs
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017\_int\_base = 9.93

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-04 12:44:07-0500.

Report generated on 2019-11-26 12:51:32 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.