



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R740xd (Intel Xeon Platinum 8280, 2.70 GHz)

**SPECSpeed®2017\_int\_base = 11.6**

**SPECSpeed®2017\_int\_peak = 11.8**

CPU2017 License: 55


Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

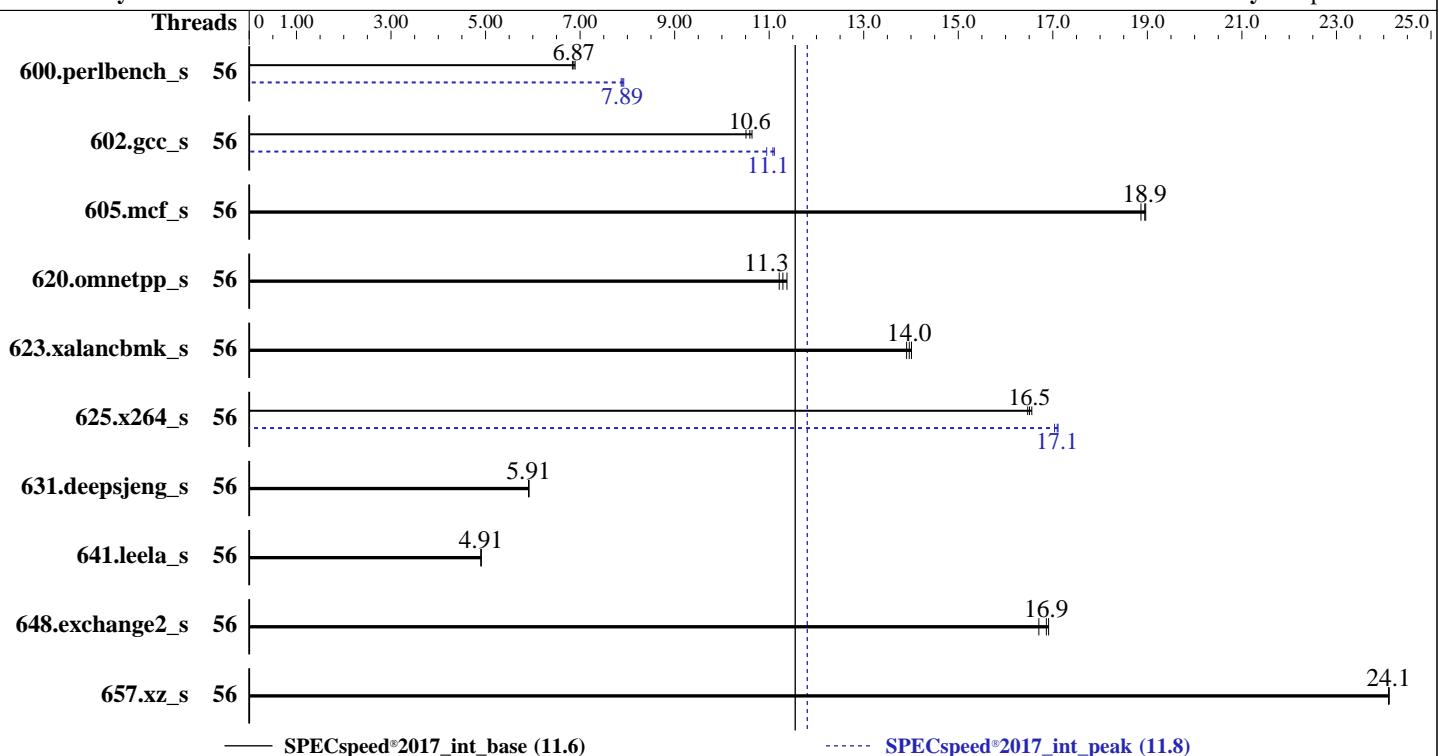

Hardware		Software	
CPU Name:	Intel Xeon Platinum 8280	OS:	Red Hat Enterprise Linux 8.1
Max MHz:	4000		kernel 4.18.0-147.el8.x86_64
Nominal:	2700	Compiler:	C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;
Enabled:	56 cores, 2 chips		Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
Orderable:	1,2 chips	Parallel:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 2.7.7 released May-2020
L2:	1 MB I+D on chip per core	File System:	tmpfs
L3:	38.5 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933V-R, running at 2933)	Peak Pointers:	64-bit
Storage:	1 x 1.92 TB SATA SSD	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8280, 2.70 GHz)

**SPECspeed®2017\_int\_base = 11.6**

**SPECspeed®2017\_int\_peak = 11.8**

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	56	260	6.84	257	6.89	<b>258</b>	<b>6.87</b>	56	224	7.92	226	7.87	<b>225</b>	<b>7.89</b>		
602.gcc_s	56	<b>376</b>	<b>10.6</b>	374	10.6	379	10.5	56	<b>359</b>	<b>11.1</b>	358	11.1	364	10.9		
605.mcf_s	56	249	19.0	<b>249</b>	<b>18.9</b>	250	18.9	56	249	19.0	<b>249</b>	<b>18.9</b>	250	18.9		
620.omnetpp_s	56	145	11.2	<b>144</b>	<b>11.3</b>	143	11.4	56	145	11.2	<b>144</b>	<b>11.3</b>	143	11.4		
623.xalancbmk_s	56	<b>101</b>	<b>14.0</b>	102	13.9	101	14.0	56	<b>101</b>	<b>14.0</b>	102	13.9	101	14.0		
625.x264_s	56	107	16.5	107	16.6	<b>107</b>	<b>16.5</b>	56	104	17.0	<b>103</b>	<b>17.1</b>	103	17.1		
631.deepsjeng_s	56	242	5.92	242	5.91	<b>242</b>	<b>5.91</b>	56	242	5.92	242	5.91	<b>242</b>	<b>5.91</b>		
641.leela_s	56	<b>348</b>	<b>4.91</b>	348	4.91	348	4.90	56	<b>348</b>	<b>4.91</b>	348	4.91	348	4.90		
648.exchange2_s	56	174	16.9	176	16.7	<b>174</b>	<b>16.9</b>	56	174	16.9	176	16.7	<b>174</b>	<b>16.9</b>		
657.xz_s	56	256	24.1	256	24.1	<b>256</b>	<b>24.1</b>	56	256	24.1	256	24.1	<b>256</b>	<b>24.1</b>		
<b>SPECspeed®2017_int_base = 11.6</b>																
<b>SPECspeed®2017_int_peak = 11.8</b>																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.  
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-ic19.1u1/lib/intel64:/mnt/ramdisk/cpu2017-ic19.1u1
    /je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8280, 2.70 GHz)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.8

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Benchmark run from a 225 GB ramdisk created with the cmd: "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

Sub NUMA Cluster disabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub set to standard

Logical Processor disabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

UPI Prefetch enabled

LLC Prefetch disabled

Dead Line LLC Alloc enabled

Directory AtoS disabled

Sysinfo program /mnt/ramdisk/cpu2017-ic19.1u1/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on user-pc.spa.lab Sat May 23 15:18:49 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
  2 "physical id"s (chips)
  56 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8280, 2.70 GHz)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.8

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Platform Notes (Continued)

```
cpu cores : 28
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:  0-55
Thread(s) per core:   1
Core(s) per socket:   28
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:               6
CPU MHz:               1835.682
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:              5400.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):     0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54
NUMA node1 CPU(s):     1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavenc xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8280, 2.70 GHz)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.8

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50
52 54
node 0 size: 385606 MB
node 0 free: 384277 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39 41 43 45 47 49 51
53 55
node 1 size: 387040 MB
node 1 free: 377621 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10
```

From /proc/meminfo

```
MemTotal:      791190484 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.1 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.1"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

uname -a:

```
Linux user-pc.spa.lab 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8280, 2.70 GHz)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.8

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 May 23 15:15 last=5

SPEC is set to: /mnt/ramdisk/cpu2017-ic19.lul

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	225G	4.2G	221G	2%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id  
BIOS: Dell Inc. 2.7.7 05/04/2020  
Vendor: Dell Inc.  
Product: PowerEdge R740xd  
Product Family: PowerEdge  
Serial: F5BMCS2

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x 002C00B3002C 36ASF4G72PZ-3G2E2	32 GB	2 rank	3200
17x 002C00B3002C 36ASF4G72PZ-3G2E7	32 GB	2 rank	3200
1x 002C0632002C 36ASF4G72PZ-3G2E2	32 GB	2 rank	3200
2x 002C069D002C 36ASF4G72PZ-3G2E2	32 GB	2 rank	3200
2x 002C069D002C 36ASF4G72PZ-3G2E7	32 GB	2 rank	3200
1x 00AD063200AD HMA84GR7CJR4N-XN	32 GB	2 rank	3200

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
	625.x264_s(base, peak) 657.xz_s(base, peak)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8280, 2.70 GHz)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.8

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

=====

C | 600.perlbench\_s(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 600.perlbench\_s(base) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak)  
| 625.x264\_s(base, peak) 657.xz\_s(base, peak)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 600.perlbench\_s(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 648.exchange2\_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8280, 2.70 GHz)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.8

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-fuse-lld=gold -qopt-mem-layout-trans=4 -fopenmp -DSPEC\_OPENMP  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse  
-funroll-loops -fuse-lld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -xCORE-AVX512  
-O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-mbranches-within-32B-boundaries



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8280, 2.70 GHz)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64(\*) -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

(\*) Indicates a portability flag that was found in a non-portability variable.

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc  
  
602.gcc\_s: -m64 -qnextgen -std=c11 -fuse-ld=gold  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8280, 2.70 GHz)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

605.mcf\_s: basepeak = yes

```
625.x264_s: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-23 16:18:49-0400.

Report generated on 2020-06-09 16:09:11 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-09.