



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V2  
(2.30 GHz, Intel Xeon Silver 4310T)

SPECrate®2017\_fp\_base = 132

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

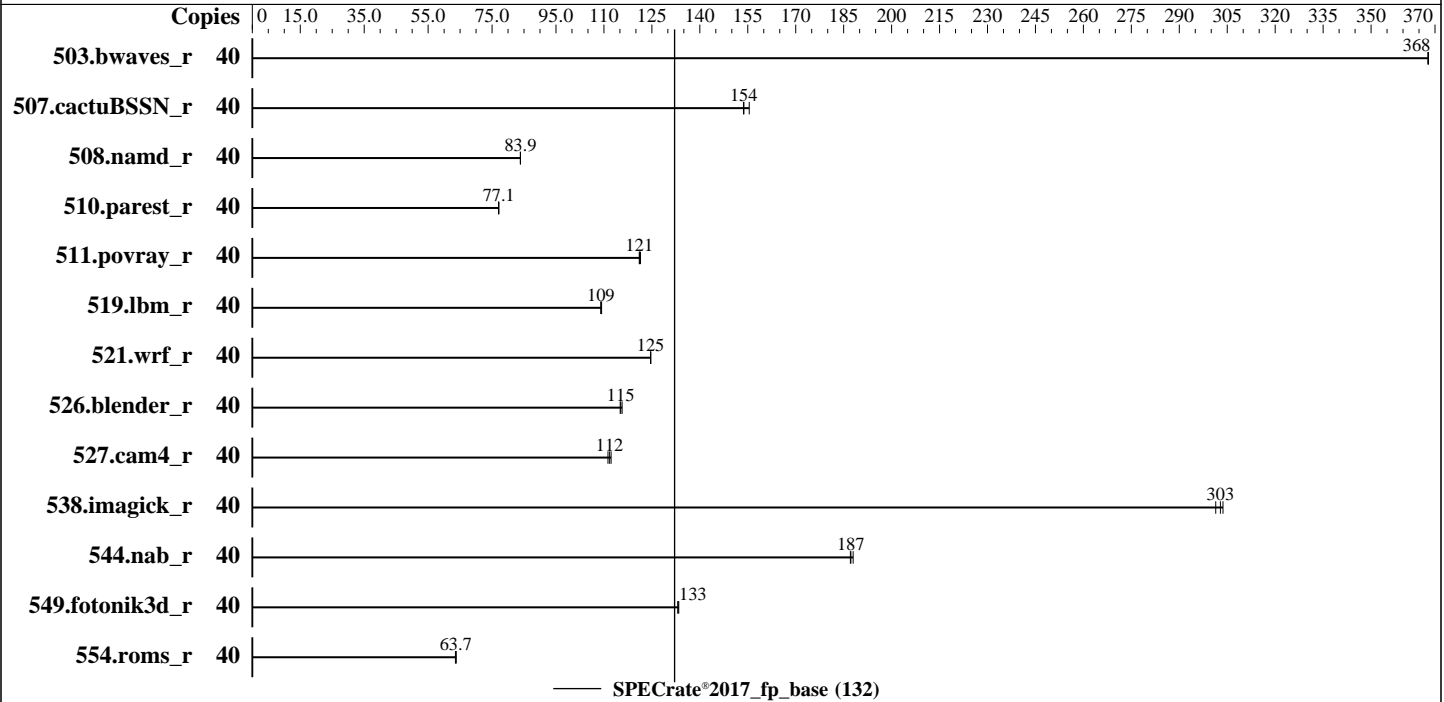

### Hardware

CPU Name: Intel Xeon Silver 4310T  
 Max MHz: 3400  
 Nominal: 2300  
 Enabled: 20 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 15 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R, running at 2666)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86\_64)  
 Kernel 5.3.18-22-default  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++  
 Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler  
 Classic Build 20201112 for Linux;  
 Parallel: No  
 Firmware: Lenovo BIOS Version AFE111A 1.02 released May-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 132

ThinkSystem SR630 V2  
(2.30 GHz, Intel Xeon Silver 4310T)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jun-2021  
Hardware Availability: Jul-2021  
Software Availability: Dec-2020

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	40	1091	368	<b><u>1090</u></b>	<b><u>368</u></b>	1090	368							
507.cactuBSSN_r	40	<b><u>329</u></b>	<b><u>154</u></b>	330	154	326	155							
508.namd_r	40	453	83.8	<b><u>453</u></b>	<b><u>83.9</u></b>	453	83.9							
510.parest_r	40	1358	77.0	<b><u>1357</u></b>	<b><u>77.1</u></b>	1357	77.1							
511.povray_r	40	771	121	<b><u>771</u></b>	<b><u>121</u></b>	769	121							
519.lbm_r	40	387	109	386	109	<b><u>386</u></b>	<b><u>109</u></b>							
521.wrf_r	40	719	125	719	125	<b><u>719</u></b>	<b><u>125</u></b>							
526.blender_r	40	527	116	529	115	<b><u>529</u></b>	<b><u>115</u></b>							
527.cam4_r	40	623	112	<b><u>626</u></b>	<b><u>112</u></b>	629	111							
538.imagick_r	40	330	301	328	304	<b><u>328</u></b>	<b><u>303</u></b>							
544.nab_r	40	358	188	360	187	<b><u>360</u></b>	<b><u>187</u></b>							
549.fotonik3d_r	40	1168	133	1171	133	<b><u>1170</u></b>	<b><u>133</u></b>							
554.roms_r	40	<b><u>998</u></b>	<b><u>63.7</u></b>	997	63.8	1000	63.5							

SPECrate®2017\_fp\_base = 132

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.8-ic2021.1-revA-update1/lib/intel64:/home/cpu2017-1.1.8-ic2021.1-revA-update1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM memory using openSUSE Leap 15.2  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 132

ThinkSystem SR630 V2  
(2.30 GHz, Intel Xeon Silver 4310T)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

## General Notes (Continued)

Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
MONITOR/MWAIT set to Enabled  
Intel Virtualization Technology set to Disabled  
XPT Prefetcher set to Disabled

Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revA-update1/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Sat Jun 26 08:57:16 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Silver 4310T CPU @ 2.30GHz  
2 "physical id"s (chips)  
40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 10  
siblings : 20  
physical 0: cores 0 1 2 3 4 5 6 7 8 9  
physical 1: cores 0 1 2 3 4 5 6 7 8 9

From lscpu from util-linux 2.33.1:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 132

ThinkSystem SR630 V2  
(2.30 GHz, Intel Xeon Silver 4310T)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```

Address sizes:      46 bits physical, 57 bits virtual
CPU(s):            40
On-line CPU(s) list: 0-39
Thread(s) per core: 2
Core(s) per socket: 10
Socket(s):         2
NUMA node(s):     2
Vendor ID:         GenuineIntel
CPU family:        6
Model:             106
Model name:        Intel(R) Xeon(R) Silver 4310T CPU @ 2.30GHz
Stepping:          6
CPU MHz:           2888.492
BogoMIPS:          4600.00
Virtualization:    VT-x
L1d cache:         48K
L1i cache:         32K
L2 cache:          1280K
L3 cache:          15360K
NUMA node0 CPU(s): 0-9,20-29
NUMA node1 CPU(s): 10-19,30-39
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid md_clear pconfig flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 15360 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
node 0 size: 515681 MB
node 0 free: 514800 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
node 1 size: 516054 MB
node 1 free: 515080 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 132

ThinkSystem SR630 V2  
(2.30 GHz, Intel Xeon Silver 4310T)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

node distances:

```
node 0 1
0: 10 20
1: 20 10
```

From /proc/meminfo

```
MemTotal: 1056497224 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 15 SP2
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

uname -a:

```
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected
```

run-level 3 Jun 26 01:05

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 132

ThinkSystem SR630 V2  
(2.30 GHz, Intel Xeon Silver 4310T)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revA-updatel  
Filesystem      Type   Size   Used Avail Use% Mounted on  
/dev/sdc3       xfs   891G   33G  858G   4% /

From /sys/devices/virtual/dmi/id  
Vendor:            Lenovo  
Product:           ThinkSystem SR630 V2 MB  
Product Family:   ThinkSystem  
Serial:            1234567890

Additional information from dmidecode 3.2 follows.   WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
32x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2666

BIOS:  
BIOS Vendor:        Lenovo  
BIOS Version:       AFE111A-1.02  
BIOS Date:          05/07/2021  
BIOS Revision:     1.2  
Firmware Revision: 1.10

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C                    | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++                   | 508.namd\_r(base) 510.parest\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C                | 511.povray\_r(base) 526.blender\_r(base)  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V2  
(2.30 GHz, Intel Xeon Silver 4310T)

SPECrate®2017\_fp\_base = 132

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Compiler Version Notes (Continued)

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

### Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_fp\_base = 132

ThinkSystem SR630 V2  
(2.30 GHz, Intel Xeon Silver 4310T)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 132

ThinkSystem SR630 V2  
(2.30 GHz, Intel Xeon Silver 4310T)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Jun-2021

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jul-2021

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2020

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICELake-E.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICELake-E.xml>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V2  
(2.30 GHz, Intel Xeon Silver 4310T)

SPECrate®2017\_fp\_base = 132

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021

**Hardware Availability:** Jul-2021

**Software Availability:** Dec-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-06-25 20:57:15-0400.

Report generated on 2021-07-21 15:49:28 by CPU2017 PDF formatter v6442.

Originally published on 2021-07-20.