



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE9640 (Intel Xeon Platinum 8470Q)

SPECSpeed®2017\_int\_base = 14.8

SPECSpeed®2017\_int\_peak = 15.0

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

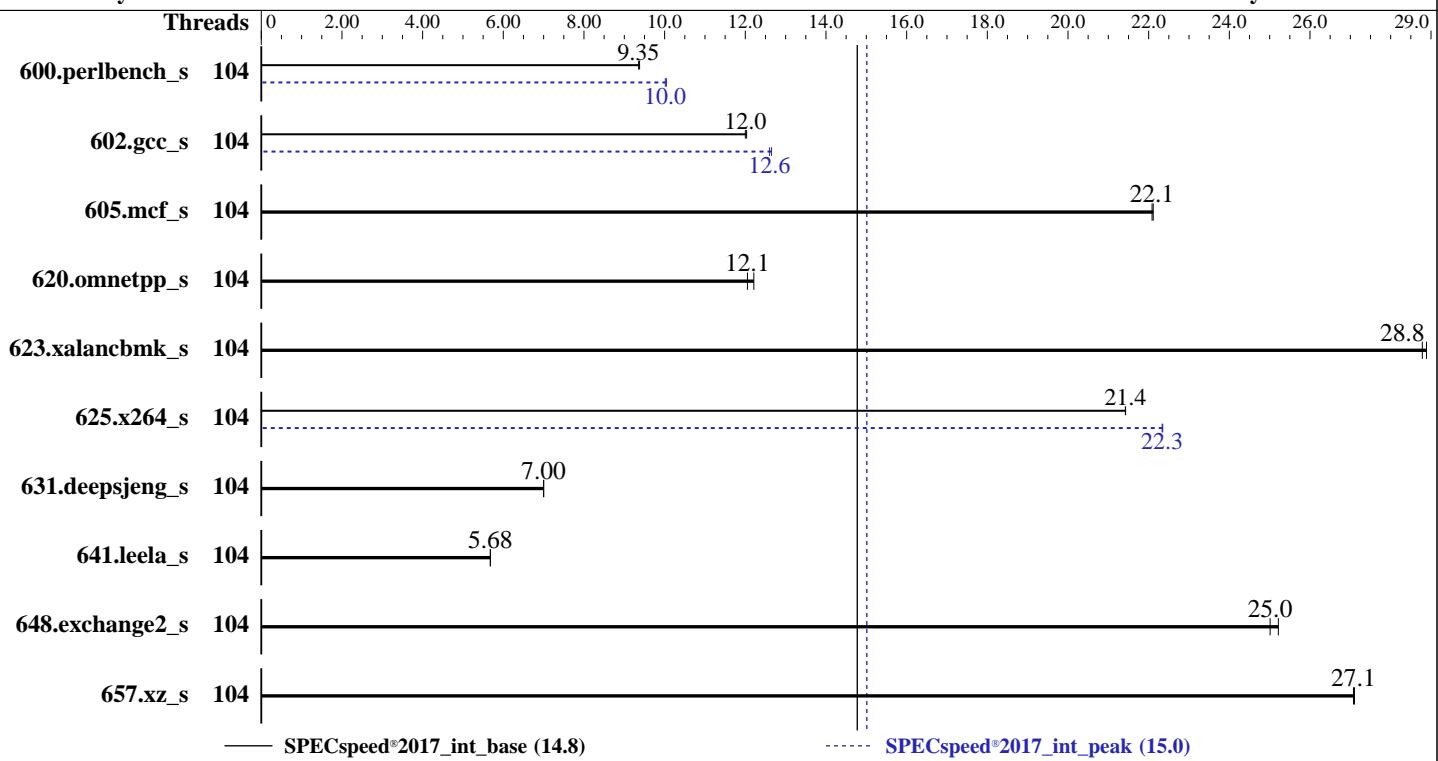

Hardware	
CPU Name:	Intel Xeon Platinum 8470Q
Max MHz:	3800
Nominal:	2100
Enabled:	104 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	70 GB on tmpfs
Other:	None

Software	
OS:	Red Hat Enterprise Linux 9.0 (Plow)
Compiler:	5.14.0-70.13.1.el9_0.x86_64 C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 0.5.33 released May-2023
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	104	<b><u>190</u></b>	<b><u>9.35</u></b>	189	9.38			104	<b><u>177</u></b>	<b><u>10.0</u></b>	177	10.0		
602.gcc_s	104	<b><u>332</u></b>	<b><u>12.0</u></b>	331	12.0			104	<b><u>316</u></b>	<b><u>12.6</u></b>	315	12.6		
605.mcf_s	104	213	22.1	<b><u>214</u></b>	<b><u>22.1</u></b>			104	213	22.1	<b><u>214</u></b>	<b><u>22.1</u></b>		
620.omnetpp_s	104	134	12.2	<b><u>135</u></b>	<b><u>12.1</u></b>			104	134	12.2	<b><u>135</u></b>	<b><u>12.1</u></b>		
623.xalancbmk_s	104	49.1	28.9	<b><u>49.2</u></b>	<b><u>28.8</u></b>			104	49.1	28.9	<b><u>49.2</u></b>	<b><u>28.8</u></b>		
625.x264_s	104	82.3	21.4	<b><u>82.3</u></b>	<b><u>21.4</u></b>			104	<b><u>79.0</u></b>	<b><u>22.3</u></b>	78.9	22.3		
631.deepsjeng_s	104	205	7.00	<b><u>205</u></b>	<b><u>7.00</u></b>			104	205	7.00	<b><u>205</u></b>	<b><u>7.00</u></b>		
641.leela_s	104	300	5.68	<b><u>300</u></b>	<b><u>5.68</u></b>			104	300	5.68	<b><u>300</u></b>	<b><u>5.68</u></b>		
648.exchange2_s	104	<b><u>118</u></b>	<b><u>25.0</u></b>	117	25.2			104	<b><u>118</u></b>	<b><u>25.0</u></b>	117	25.2		
657.xz_s	104	228	27.1	<b><u>228</u></b>	<b><u>27.1</u></b>			104	228	27.1	<b><u>228</u></b>	<b><u>27.1</u></b>		
SPECspeed®2017_int_base = <b><u>14.8</u></b>														
SPECspeed®2017_int_peak = <b><u>15.0</u></b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.8

PowerEdge XE9640 (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
        Logical Processor : Disabled
    Virtualization Technology : Disabled
    DCU Streamer Prefetcher : Disabled
        Sub NUMA Cluster : 2-way Clustering
        Optimizer Mode : Enabled
```

```
    System Profile : Custom
    CPU Power Management : Maximum Performance
        C1E : Disabled
        C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
    PCI ASPM L1 Link
        Power Management : Disabled
```

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu May 25 11:24:52 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Services, from systemctl list-unit-files

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.8

PowerEdge XE9640 (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline

14. cpupower frequency-info

15. sysctl

16. /sys/kernel/mm/transparent\_hugepage

17. /sys/kernel/mm/transparent\_hugepage/khugepaged

18. OS release

19. Disk information

20. /sys/devices/virtual/dmi/id

21. dmidecode

22. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux

-----  
2. w  
11:24:52 up 1 min, 1 user, load average: 0.75, 0.26, 0.09  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root ttym1 11:24 28.00s 0.94s 0.00s /bin/bash ./dell-run-speccpu.sh speed --define  
DL-BIOSinc=Dell-BIOS\_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define  
DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.6 --define DL-LQC=1 --output\_format html,pdf,txt

-----  
3. Username  
From environment variable \$USER: root

-----  
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4124008  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4124008  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31  
login -- root  
-bash  
/bin/bash ./DELL\_speed.sh  
/bin/bash ./dell-run-main.sh speed  
/bin/bash ./dell-run-main.sh speed  
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS\_Xeon-4.inc --define DL-BIOS-LogProcD=1  
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.6 --define  
DL-LQC=1 --output\_format html,pdf,txt

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.8

PowerEdge XE9640 (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.6 --define
DL-LQC=1 --output_format html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=104 --tune base,peak -o all --define
intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define
DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define
DL-VERS=v4.6 --define DL-LQC=1 --output_format html,pdf,txt intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=104 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc
--define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2
--define DL-VERS=v4.6 --define DL-LQC=1 --output_format html,pdf,txt --nopower --runmode speed --tune
base:peak --size refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
-----  
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8470Q
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 6
microcode       : 0x2b0004b1
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 52
siblings         : 52
2 physical ids (chips)
104 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 104
On-line CPU(s) list:    0-103
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel
Model name:             Intel(R) Xeon(R) Platinum 8470Q
BIOS Model name:        Intel(R) Xeon(R) Platinum 8470Q
CPU family:              6
Model:                  143
Thread(s) per core:     1
Core(s) per socket:     52
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```

Socket(s): 2
Stepping: 6
BogoMIPS: 4200.00
Flags:
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmil
avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
avx512fma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopctdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
L1d cache: 4.9 MiB (104 instances)
L1i cache: 3.3 MiB (104 instances)
L2 cache: 208 MiB (104 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0,4,8,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,92,96,100
NUMA node1 CPU(s): 2,6,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,90,94,98,102
NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,35,39,45,49,53,57,61,67,69,71,75,79,83,87,91,97,101
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,37,41,43,47,51,55,59,63,65,73,77,81,85,89,93,95,99,103
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K     4.9M   12 Data        1       64          1           64
  L1i     32K     3.3M    8 Instruction  1       64          1           64
  L2      2M      208M   16 Unified      2      2048          1           64
  L3     105M     210M   15 Unified      3     114688          1           64

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0,4,8,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,92,96,100
node 0 size: 256982 MB
node 0 free: 256615 MB
node 1 cpus: 2,6,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,90,94,98,102
node 1 size: 258005 MB
node 1 free: 248276 MB
node 2 cpus: 1,5,9,13,17,21,25,29,33,35,39,45,49,53,57,61,67,69,71,75,79,83,87,91,97,101

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.8

PowerEdge XE9640 (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
node 2 size: 258042 MB
node 2 free: 257590 MB
node 3 cpus: 3,7,11,15,19,23,27,31,37,41,43,47,51,55,59,63,65,73,77,81,85,89,93,95,99,103
node 3 size: 258031 MB
node 3 free: 257655 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10
```

```
-----  
9. /proc/meminfo
MemTotal: 1055807984 kB
```

```
-----  
10. who -r
run-level 3 May 25 11:24
```

```
-----  
11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user running
```

```
-----  
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
systemd-network-generator udisks2 upower vgauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq iprdump iprinit iprule update iscsid iscsiuiio kpatch kvm_stat
ledmon man-db-restart-cache-update nftables nvme-firmware autoconnect podman podman-auto-update
podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbuild
serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysext wpa_supplicant
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

```
-----  
14. cpupower frequency-info
analyzing CPU 0:
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.8

PowerEdge XE9640 (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

Unable to determine current policy

boost state support:

Supported: yes

Active: yes

-----  
15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
16. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvise [madvise] never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
system-release Red Hat Enterprise Linux release 9.0 (Plow)

-----  
19. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 70G 4.2G 66G 6% /mnt/ramdisk

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.8

PowerEdge XE9640 (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

Product: PowerEdge XE9640  
Product Family: PowerEdge  
Serial: MS01501

-----  
21. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800

-----  
22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 0.5.33  
BIOS Date: 05/18/2023  
BIOS Revision: 0.5

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

=====  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

=====  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base, peak)

=====  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.8

PowerEdge XE9640 (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64  
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX  
625.x264_s: -DSPEC_LP64  
631.deepsjeng_s: -DSPEC_LP64  
641.leela_s: -DSPEC_LP64  
648.exchange2_s: -DSPEC_LP64  
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.8

PowerEdge XE9640 (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf\_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE9640 (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-25 11:24:52-0400.

Report generated on 2024-01-29 18:07:53 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.