



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECrate®2017_int_base = 397

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

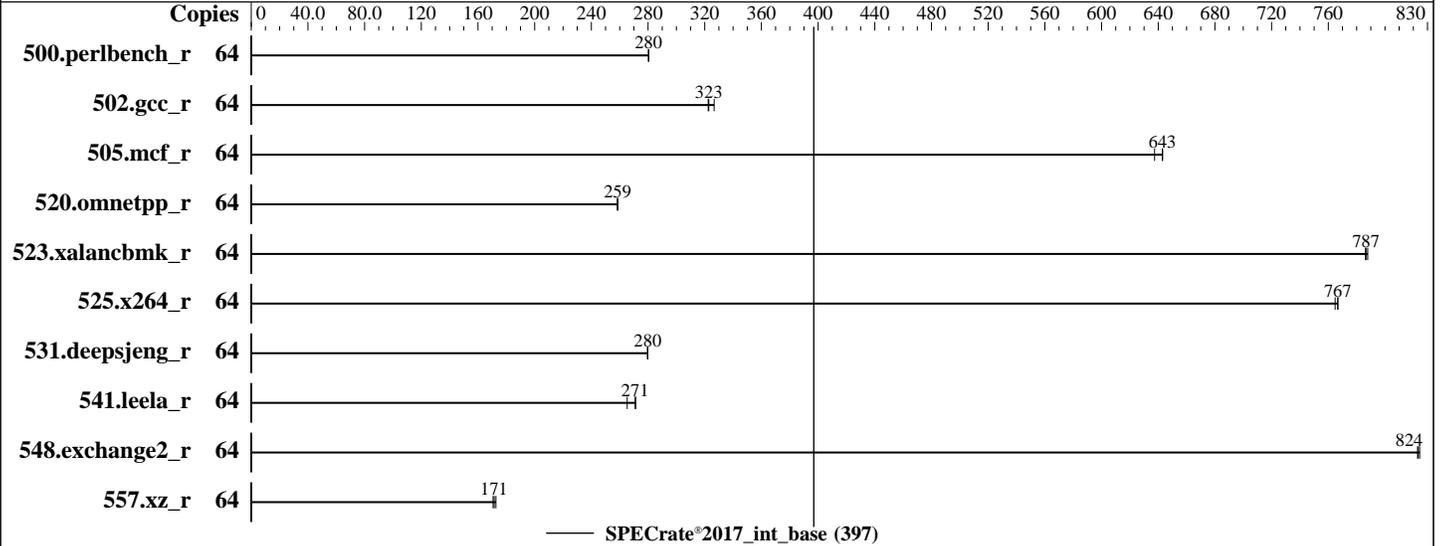

Hardware

CPU Name: Intel Xeon Gold 6434H
 Max MHz: 4100
 Nominal: 3700
 Enabled: 32 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 22.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version RSE105E 1.10 released May-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECrate®2017_int_base = 397

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	363	280	<u>363</u>	<u>280</u>	363	280							
502.gcc_r	64	<u>281</u>	<u>323</u>	281	322	277	327							
505.mcf_r	64	162	637	<u>161</u>	<u>643</u>	161	643							
520.omnetpp_r	64	325	259	325	258	<u>325</u>	<u>259</u>							
523.xalancbmk_r	64	85.8	788	86.0	786	<u>85.9</u>	<u>787</u>							
525.x264_r	64	147	765	<u>146</u>	<u>767</u>	146	767							
531.deepsjeng_r	64	<u>262</u>	<u>280</u>	262	280	262	280							
541.leela_r	64	400	265	<u>391</u>	<u>271</u>	391	271							
548.exchange2_r	64	<u>204</u>	<u>824</u>	204	823	203	824							
557.xz_r	64	400	173	<u>403</u>	<u>171</u>	405	171							

SPECrate®2017_int_base = 397

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/lib/ia32:/home/cpu2017-1.1.9-ic2023.0/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECrate®2017_int_base = 397

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C1 Enhanced Mode set to Enabled

DCU Streamer Prefetcher set to Disabled

SNC set to SNC2

UPI Link Disable set to Disabled 1 Link

LLC Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Aug 21 16:45:05 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
- -----

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 397

ThinkSystem SR860 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

1. `uname -a`

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

2. `w`

```
16:45:05 up 48 min, 1 user, load average: 3.59, 35.75, 49.61
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1    -               15:57   8.00s  0.89s  0.01s -bash
```

3. `Username`

```
From environment variable $USER: root
```

4. `ulimit -a`

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4126993
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126993
virtual memory           (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. `sysinfo process ancestry`

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.085/templplogs/preenv.intrate.085.0.log --lognum 085.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0
```

6. `/proc/cpuinfo`

```
model name      : Intel(R) Xeon(R) Gold 6434H
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b0001b0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 8
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 397

ThinkSystem SR860 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
siblings          : 16
4 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 2: core ids 0-7
physical id 3: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 128-143
physical id 2: apicids 256-271
physical id 3: apicids 384-399
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 6434H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              4
Stepping:               8
BogoMIPS:               7400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
                        erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             1.5 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              64 MiB (32 instances)
L3 cache:              90 MiB (4 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-3,32-35
NUMA node1 CPU(s):    4-7,36-39
NUMA node2 CPU(s):    8-11,40-43
NUMA node3 CPU(s):    12-15,44-47
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECrate®2017_int_base = 397

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node4 CPU(s):          16-19,48-51
NUMA node5 CPU(s):          20-23,52-55
NUMA node6 CPU(s):          24-27,56-59
NUMA node7 CPU(s):          28-31,60-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	22.5M	90M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 128683 MB
node 0 free: 127683 MB
node 1 cpus: 4-7,36-39
node 1 size: 129021 MB
node 1 free: 128481 MB
node 2 cpus: 8-11,40-43
node 2 size: 129021 MB
node 2 free: 128557 MB
node 3 cpus: 12-15,44-47
node 3 size: 129021 MB
node 3 free: 128579 MB
node 4 cpus: 16-19,48-51
node 4 size: 128987 MB
node 4 free: 128565 MB
node 5 cpus: 20-23,52-55
node 5 size: 129021 MB
node 5 free: 128597 MB
node 6 cpus: 24-27,56-59
node 6 size: 129021 MB
node 6 free: 128597 MB
node 7 cpus: 28-31,60-63
node 7 size: 128992 MB
node 7 free: 128571 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 21 21 31 31 21 21
1:  12 10 21 21 31 31 21 21
2:  21 21 10 12 21 21 31 31
3:  21 21 12 10 21 21 31 31
4:  31 31 21 21 10 12 21 21
5:  31 31 21 21 12 10 21 21
6:  21 21 31 31 21 21 10 12
7:  21 21 31 31 21 21 12 10

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 397

ThinkSystem SR860 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 1056534888 kB

10. who -r

run-level 3 Aug 21 15:56

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=07b494b8-a782-4eba-84f2-ef5cae789da8
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECrate®2017_int_base = 397

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   445G  12G  433G   3% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR860 V3
Product Family:  ThinkSystem
Serial:          None

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
19x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800
6x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
4x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800
3x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:          Lenovo
BIOS Version:         RSE105E-1.10

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECrate®2017_int_base = 397

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

BIOS Date: 05/12/2023
BIOS Revision: 1.10
Firmware Revision: 1.10

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 397

ThinkSystem SR860 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-X.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-X.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-21 04:45:04-0400.
Report generated on 2024-01-29 18:08:30 by CPU2017 PDF formatter v6716.
Originally published on 2023-09-13.