



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

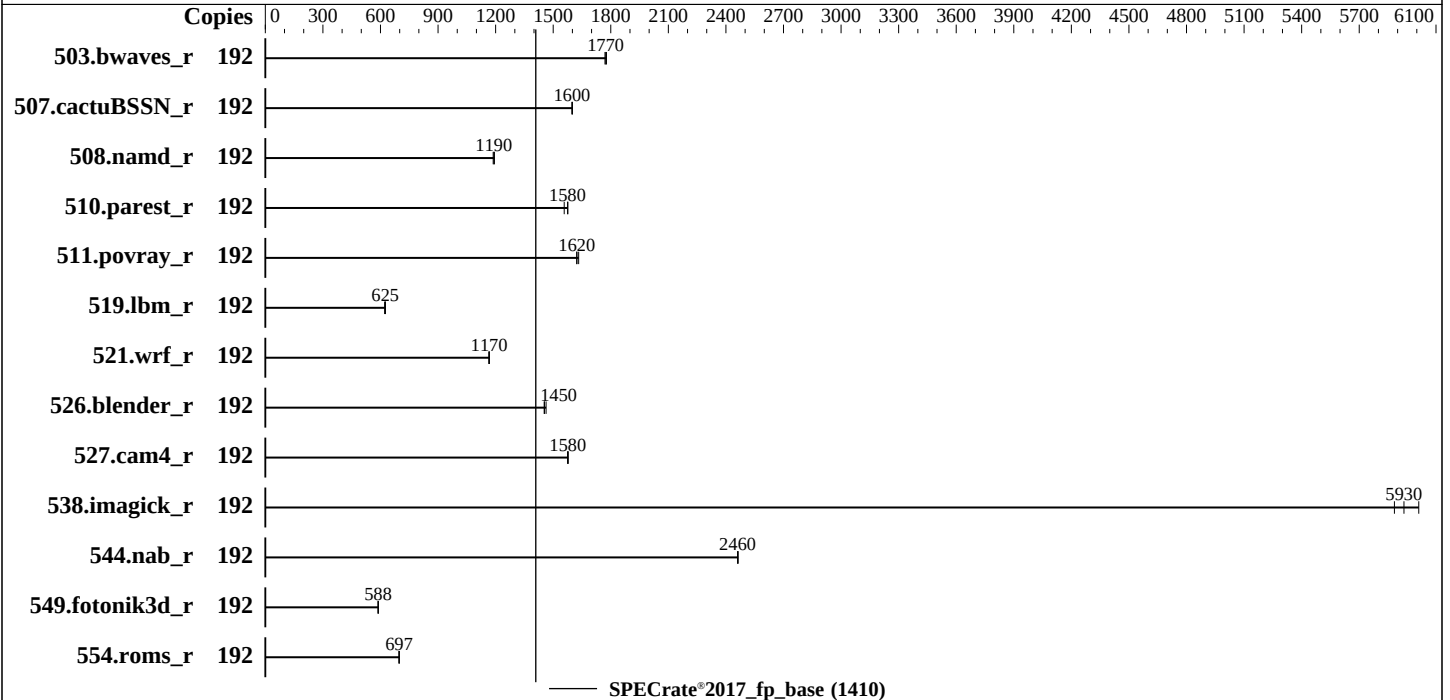

Hardware

CPU Name: AMD EPYC 9654
Max MHz: 3700
Nominal: 2400
Enabled: 192 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip,
32 MB shared / 8 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x PCIE NVME SSD, 6.4 TB
Other: Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
5.14.0-70.13.1.el9_0.x86_64
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
Parallel: No
Firmware: Fujitsu BIOS Version Version V5.0.0.27 R1.5.0 for
D4129-A1x. Released May-2024
tested as V5.0.0.27 R1.4.0 for D4129-A1x Jan-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS set to prefer performance
at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	<u>1085</u>	<u>1770</u>	1083	1780	1088	1770							
507.cactuBSSN_r	192	<u>152</u>	<u>1600</u>	152	1600	152	1600							
508.namd_r	192	154	1190	153	1190	<u>153</u>	<u>1190</u>							
510.parest_r	192	323	1560	319	1580	<u>319</u>	<u>1580</u>							
511.povray_r	192	276	1620	<u>276</u>	<u>1620</u>	275	1630							
519.lbm_r	192	326	622	323	626	<u>324</u>	<u>625</u>							
521.wrf_r	192	<u>369</u>	<u>1170</u>	369	1160	369	1170							
526.blender_r	192	201	1450	<u>201</u>	<u>1450</u>	200	1460							
527.cam4_r	192	213	1580	<u>213</u>	<u>1580</u>	213	1580							
538.imagick_r	192	<u>80.5</u>	<u>5930</u>	81.2	5880	79.4	6010							
544.nab_r	192	131	2460	<u>131</u>	<u>2460</u>	131	2460							
549.fotonik3d_r	192	<u>1272</u>	<u>588</u>	1273	588	1272	588							
554.roms_r	192	437	697	438	697	<u>438</u>	<u>697</u>							

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =
"/home/Benchmark/speccpu2017r/amd_rate_aocc400_znver4_A_lib/lib:/home/Benchmark/speccpu2017r/amd_rate_
aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
SMT Control = Disabled
L2 Stream HW Prefetcher = Disabled
Determinism Slider = Power
TDP Control = Manual
TDP Limit = 400
Package Power Limit Control = Manual
Package Power Limit = 400
Power Profile Selection = High Performance
NUMA nodes per socket = NPS4
Periodic Directory Rinse (PDR) Tuning = Cache-Bound
Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017r/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Feb 19 17:56:37 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

```
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
17:56:37 up 3:31, 1 user, load average: 0.03, 0.01, 0.00
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1     17:51   13.00s  1.27s  0.22s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority          (-e) 0
file size                    (blocks, -f) unlimited
pending signals               (-i) 3091762
max locked memory             (kbytes, -l) 2097152
max memory size               (kbytes, -m) unlimited
open files                    (-n) 1024
pipe size                     (512 bytes, -p) 8
POSIX message queues          (bytes, -q) 819200
real-time priority            (-r) 0
stack size                    (kbytes, -s) unlimited
cpu time                      (seconds, -t) unlimited
max user processes            (-u) 3091762
virtual memory                (kbytes, -v) unlimited
file locks                    (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
python3 ./run_amd_fprate_aocc400_znver4_A1.py
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

```
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runccpu --config amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 fprate
runccpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runccpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu2017r
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9654 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model         : 17
stepping      : 1
microcode     : 0xa101144
bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 96
siblings      : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 1: apicids
256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            192
On-line CPU(s) list: 0-191
Vendor ID:         AuthenticAMD
BIOS Vendor ID:    Advanced Micro Devices, Inc.
Model name:        AMD EPYC 9654 96-Core Processor
BIOS Model name:   AMD EPYC 9654 96-Core Processor
CPU family:        25
Model:             17
Thread(s) per core: 1
Core(s) per socket: 96
Socket(s):         2
Stepping:          1
Frequency boost:    enabled
CPU max MHz:       3707.8120
CPU min MHz:       1500.0000
BogoMIPS:          4792.92
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                   constant_tsc rep_good noopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                   pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                   popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                   abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

perfctr_core perfctr_nb bpxt perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

Virtualization:

L1d cache: 6 MiB (192 instances)

L1i cache: 6 MiB (192 instances)

L2 cache: 192 MiB (192 instances)

L3 cache: 768 MiB (24 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-23

NUMA node1 CPU(s): 24-47

NUMA node2 CPU(s): 48-71

NUMA node3 CPU(s): 72-95

NUMA node4 CPU(s): 96-119

NUMA node5 CPU(s): 120-143

NUMA node6 CPU(s): 144-167

NUMA node7 CPU(s): 168-191

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-23

node 0 size: 95808 MB

node 0 free: 95004 MB

node 1 cpus: 24-47

node 1 size: 96762 MB

node 1 free: 96232 MB

node 2 cpus: 48-71

node 2 size: 96762 MB

node 2 free: 96194 MB

node 3 cpus: 72-95

node 3 size: 96762 MB

node 3 free: 96025 MB

node 4 cpus: 96-119

node 4 size: 96762 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 4 free: 96236 MB
node 5 cpus: 120-143
node 5 size: 96762 MB
node 5 free: 96290 MB
node 6 cpus: 144-167
node 6 size: 96762 MB
node 6 free: 96241 MB
node 7 cpus: 168-191
node 7 size: 96660 MB
node 7 free: 96190 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10
```

9. /proc/meminfo

MemTotal: 791598660 kB

10. who -r

run-level 3 Feb 19 14:27

11. Systemd service manager version: systemd 250 (250-6.el9_0)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections pmcd pmie pmlogger rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd sssd sysstat systemd-network-generator udisks2 upower rc-local systemd-remount-fs
enabled-runtime	
disabled	arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower debug-shell fancontrol grafana-server hwloc-dump-hwdata iprdump iprinit iprupdate iscsid iscsiuiio kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvme-fc-autoconnect pmfind pmie_farm pmlogger_farm pmproxy podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbd-rebuild rrdcached saslauthd serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext trace-cmd
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

```
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 1.50 GHz and 2.40 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2400MHz

15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvice madvice never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
```

18. OS release

From /etc/*-release /etc/*-version

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

19. Disk information

SPEC is set to: /home/Benchmark/speccpu2017r

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	5.8T	60G	5.7T	2%	/home

20. /sys/devices/virtual/dmi/id

Vendor: FUJITSU
Product: PRIMERGY RX2450 M2
Product Family: SERVER
Serial: xxxxxxxxxx

21. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
24x Samsung M321R4GA3BB6-CQKEG 32 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: FUJITSU // American Megatrends Inc.
BIOS Version: V5.0.0.27 R1.4.0 for D4129-A1x
BIOS Date: 01/30/2024
BIOS Revision: 1.4
Firmware Revision: 2.42

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9654, 2.40 GHz

SPECrate®2017_fp_base = 1410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Genoa-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Genoa-RevD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-19 17:56:36-0500.

Report generated on 2025-05-13 15:02:44 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.