



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

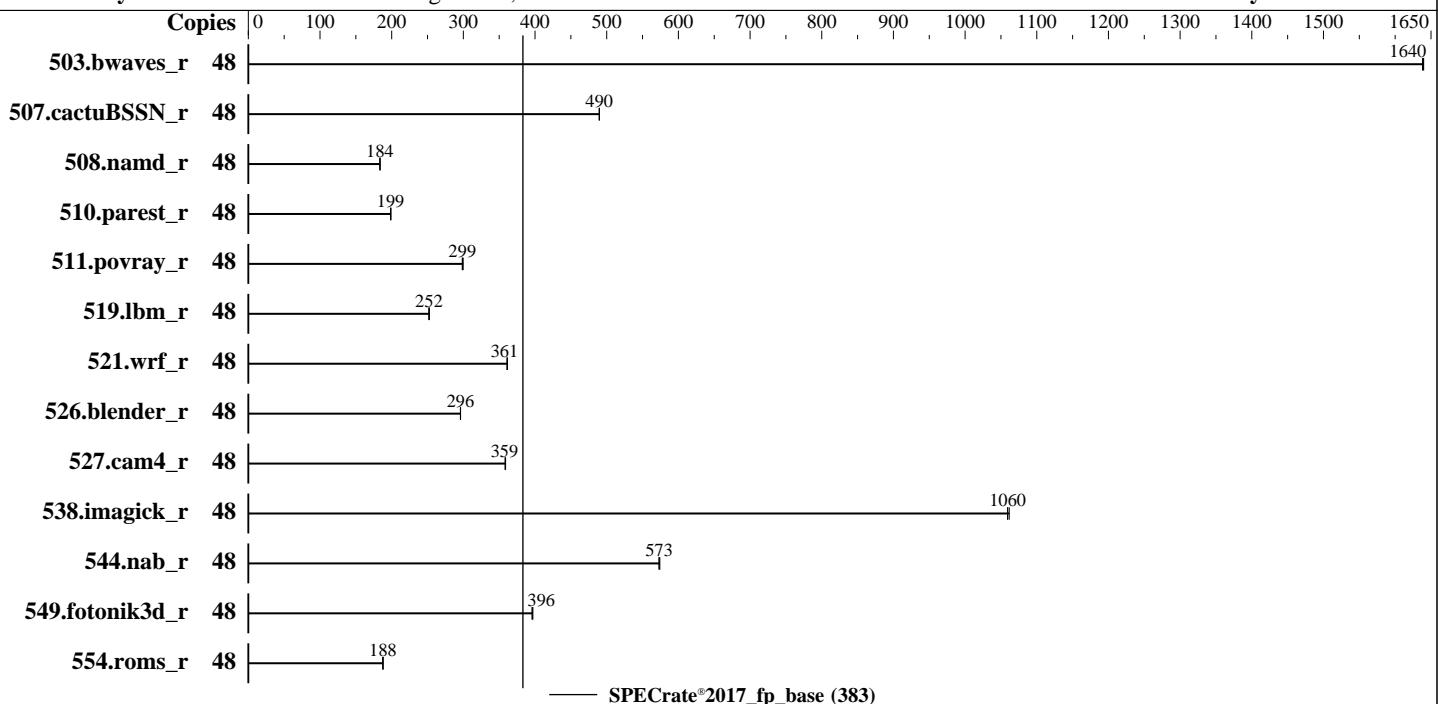

Hardware

CPU Name: Intel Xeon Silver 4510
 Max MHz: 4100
 Nominal: 2400
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 30 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R, running at 4400)
 Storage: 1 x 6.4 TB NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise High Performance Computing 15 SP5 5.14.21-150500.53-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 6.10.38P60 released Apr-2024 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	294	1640	294	1640	294	1640							
507.cactusBSSN_r	48	124	490	124	490	124	490							
508.namd_r	48	248	184	248	184	248	184							
510.parest_r	48	632	199	632	199	631	199							
511.povray_r	48	375	299	374	300	375	299							
519.lbm_r	48	201	252	200	253	201	252							
521.wrf_r	48	298	361	298	361	298	361							
526.blender_r	48	247	296	247	296	247	296							
527.cam4_r	48	234	358	234	359	234	359							
538.imagick_r	48	112	1060	113	1060	113	1060							
544.nab_r	48	141	573	141	573	141	574							
549.fotonik3d_r	48	471	397	472	396	472	396							
554.roms_r	48	406	188	406	188	407	187							

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu2017/lib/intel64:/home/speccpu2017/jet5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

SNC = Enable SNC2 (2-clusters)

Power Performance Tuning = BIOS Controls EPPB

ENERGY_PERF_BIAS_CFG mode = Performance

Sysinfo program /home/speccpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Jul 31 23:35:14 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043/lp)
x86_64 x86_64 x86_64 GNU/Linux

2. w
23:35:14 up 1 day, 6:29, 3 users, load average: 0.04, 0.03, 0.00
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttym1 - Tue17 18.00s 1.11s 0.01s sh intrate.sh

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Platform Notes (Continued)

```
root      pts/0    172.16.27.225   Tue17    5:43m  0.07s  0.07s -bash
root      pts/1    172.16.27.225   Tue17    13:14m  0.29s  0.29s -bash
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4124814
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4124814
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
sh intrate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpunew
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) SILVER 4510
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000571
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss
cpu cores       : 12
siblings         : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-11
physical id 1: core ids 0-11
physical id 0: apicids 0-23
physical id 1: apicids 64-87
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: LittleEndian
CPU(s): 48
On-line CPU(s) list: 0-47
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) SILVER 4510
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 12
Socket(s): 2
Stepping: 8
CPU max MHz: 4100.0000
CPU min MHz: 800.0000
BogoMIPS: 4800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
     lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
      invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
      tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
      avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
      arat pln pts hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
      tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
      enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
      amx_tile flush_lll arch_capabilities
Virtualization: VT-x
L1d cache: 1.1 MiB (24 instances)
L1i cache: 768 KiB (24 instances)
L2 cache: 48 MiB (24 instances)
L3 cache: 60 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

Vulnerability Spectre v2:

Mitigation: Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-5,24-29

node 0 size: 257549 MB

node 0 free: 250397 MB

node 1 cpus: 6-11,30-35

node 1 size: 258044 MB

node 1 free: 253044 MB

node 2 cpus: 12-17,36-41

node 2 size: 258010 MB

node 2 free: 253007 MB

node 3 cpus: 18-23,42-47

node 3 size: 257629 MB

node 3 free: 252115 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1055984232 kB

10. who -r

run-level 3 Jul 30 17:06

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nsqd nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation ebtables exchange-bmc-os-info gpm grub2-once haveged haveged-switch-root ipmi ipmievfd irqbindall issue-add-ssh-keys kexec-load ksm kvm_kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

```
nvmf-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@ set_kthread_prio  
smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures  
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned  
udisks2 vncserver@  
indirect wickedd
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=4607dbe1-932d-4bea-b43c-6701598385ba  
splash=silent  
resume=/dev/disk/by-uuid/2ccfd1c4-5b7d-4cdb-9370-aca95a4f79b6  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=403M,high  
crashkernel=72M,low
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 4.10 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. tuned-adm active  
Current active profile: throughput-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          0  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                   10  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10  
vm.zone_reclaim_mode            0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag      always defer defer+madvise [madvise] never  
enabled     [always] madvise never  
hpage_pmd_size 2097152  
shmem_enabled always within_size advise [never] deny force
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise High Performance Computing 15 SP5

20. Disk information
SPEC is set to: /home/specccpnew
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 1.0T 318G 707G 31% /home

21. /sys/devices/virtual/dmi/id
Vendor: N/A
Product: N/A
Product Family: Rack
Serial: N/A

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Hynix HMCG94AHBRA487N 64 GB 2 rank 6400, configured at 4400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 6.10.38P60
BIOS Date: 04/03/2024
BIOS Revision: 5.32

Compiler Version Notes

=====

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd_r(base) 510.parest_r(base)

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Silver 4510)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-31 11:35:13-0400.

Report generated on 2024-08-29 10:50:36 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-27.